

# LIGHTOLIER


by  **Signify**

## Downlighting

Lytecaster CFL 6 3/4"

1101FR 1 Light, Non-IC Remodeler

 **Uniframe**

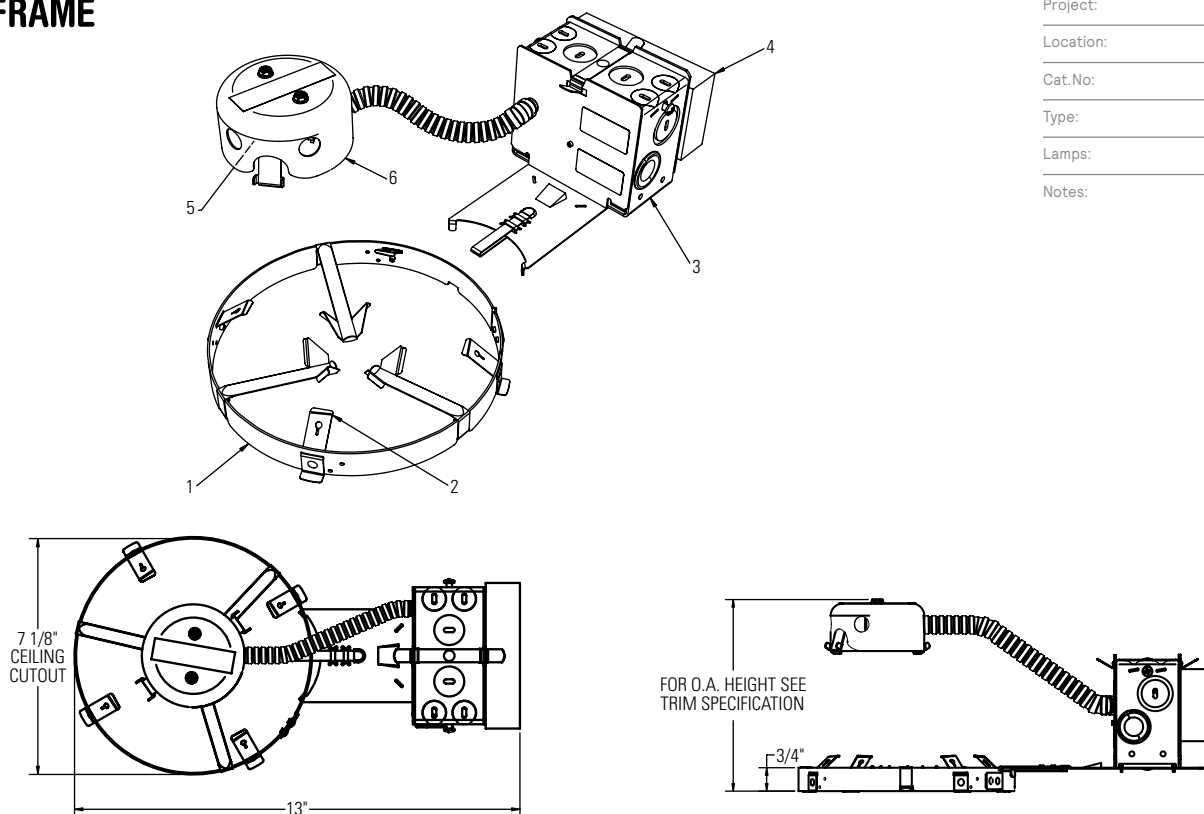

Project: \_\_\_\_\_  
 Location: \_\_\_\_\_  
 Cat.No: \_\_\_\_\_  
 Type: \_\_\_\_\_  
 Lamps: \_\_\_\_\_ Qty: \_\_\_\_\_  
 Notes: \_\_\_\_\_

Complete Fixture consists of Frame-In Kit and Reflector Trim. Select each separately.

Uniframe™ Frame-In Kit	Uniframe™ Compact Fluorescent Performance Series Reflector Trims						
	Vertical Open	Vertical Wall Wash - Single	Vertical Wall Wash - Double	Horizontal Open	Horizontal Wall Wash - Single	Horizontal Wet Location Lensed / Diffused	Horizontal Cross Blade
<b>1101FR18U</b> 18w Quad/Triple GX24q-2 Base 120v – 0.17amp max 277v – 0.08amp max  <b>1101FR2642U</b> 26w Quad/Triple GX24q-3 Base 120v – 0.24amp max 277v – 0.11amp max  32w Triple GX24q-3 Base 120v – 0.31amp max 277v – 0.13amp max  42w Triple GX24q-4 Base 120v – 0.38amp max 277v – 0.17amp max	<b>1101CL</b> <b>1101CD</b> <b>1101WH</b>	<b>1101CLSW</b> <b>1101CDSW</b> <b>1101WHSW</b>	<b>1101CLDW</b> <b>1101CDDW</b> <b>1101WHDW</b>	<b>1101HCL</b> <b>1101HCD</b> <b>1101HWH</b>	<b>1101HCLSW</b> <b>1101HCDSW</b> <b>1101HWHSW</b>	Clear Lens <b>1101HCLC</b> <b>1101HCDC</b> <b>1101HWHC</b> Opal Lens <b>1101HCLC</b> <b>1101HCDO</b> <b>1101HWHO</b> Fresnel <b>1101HCLF</b> <b>1101HCDF</b> <b>1101HWHF</b>	<b>1101HACB</b> <b>1101HWHCB</b>
Universal Series Reflector Trims (Reference Trim Spec Sheet for Recommended Lamping)							
Performance Cone	Cone	Satin Cone	Baffle	Wall Wash	Wet Location		
1113CFL 1113CDCFL	1112* 1113* 1113BK* 1113WH 1113CD* 1145 1146 1146CD 1143 1144 1144CD	1108* 1110*	1105* 1105BNM 1105WH 1176 1176WH	1135 1135WH 1195 1196 1196CD	1121 1124 1134 1177SH 1178SH 1190		

\*Add NM suffix to catalog number for Natural Metal flange and finish.

# 1101FR Lytecaster CFL 6 3/4"

## 1 Light, Non-IC Remodeler

### Features

- 1. Uniframe™ Mounting Ring:** .032" (#22ga.) thick Galvanized Steel. Accommodates existing ceilings up to 2" thick. Attaches securely to any type of ceiling material without tools using (3) mounting straps provided. Includes adhesive backed aperture template.
- 2. Trim Clips:** "Push In / Twist Out" clips hold reflector flush to ceiling.
- 3. Junction Box:** 2" x 4" x 3-1/2" (22cu.in.) .032" (#22ga.) galvanized steel. UL Listed for 90° C supply wire. Attaches to mounting ring without tools.
- 4. Ballast:** 120V – 277V UL Listed Electronic Ballast, end of lamp life protection, class "P" thermally protected, class "A" sound rating.
- 5. Socket:** Four-pin base, molded thermoplastic socket, prewired with No. 18 AWM leads to ballast.
- 6. Socket Housing:** .036" (#20ga.) Galvanized Steel housing attaches to reflector trim by spring clip for precise optic alignment.

### Labels

cULus Listed. Suitable for Damp Locations.

