


LIGHTOLIER

by  Signify

Downlighting

Uniframe CFL 6 3/4"

1101HCB Horizontal Cross Blade Trim

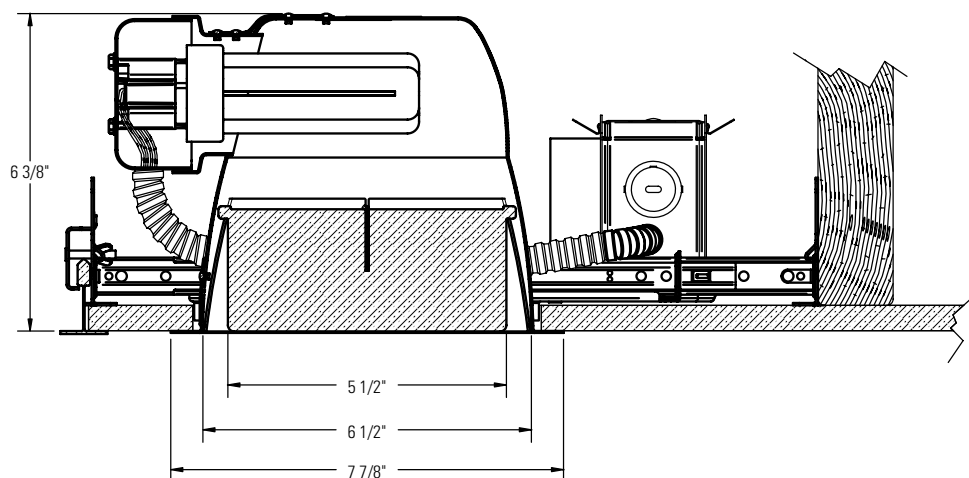

Project:

Location:

Cat.No:

Type:

Lamps:

Qty:

Notes:

Complete Fixture consists of Frame-In Kit and Reflector Trim. Select each separately.

Uniframe™ Compact Fluorescent Performance Series Reflector Trims

Compatible Frame-In Kits

(See Individual Frame-In Kit Specification Sheets)

Catalog No.	Description	Catalog No.	Installation Type	Lamping
1101HACB	6-3/4" Horizontal Shielded Cross Blade – Aluminum	1101F18U 1101FR18U	Uniframe™ Non-IC 120/277v Uniframe™ Non-IC Remodeler 120/277v	18w Quad/Triple
1101HWHCB	6-3/4" Horizontal Shielded Cross Blade – Matte White	1101FD26L1 1101FD26L2	Uniframe™ Non-IC Lutron Dimming 120v Uniframe™ Non-IC Lutron Dimming 277v	26w Quad/Triple
		1101FD32L1 1101FD32L2	Uniframe™ Non-IC Lutron Dimming 120v Uniframe™ Non-IC Lutron Dimming 277v	32w Triple
		1101F2642U 1101FR2642U 1101F2642UEM 1101FD2642MX1 1101FD2642MX2 1101FD2642M7U 1101FR264MX1 1101FR264MX2	Uniframe™ Non-IC 120/277v Uniframe™ Non-IC Remodeler 120/277v Uniframe™ Non-IC Emergency 120/277v Uniframe™ Non-IC Advance Mark10 Dimming 120v Uniframe™ Non-IC Advance Mark10 Dimming 277v Uniframe™ Non-IC Advance Mark7 Dimming 120/277v Uniframe™ Non-IC Advance Mark10 Dimming 120v Rem. Uniframe™ Non-IC Advance Mark10 Dimming 277v Rem.	26w Quad/Triple 32w Triple 42w Triple
		1101F18ICU/N	Performance IC 120/277v	18w Quad/Triple
		1101F2642ICU 1101F2642IUN	Performance IC 120/277v	26w Quad/Triple 32w Triple 42w Triple
		1101FDICMX1/N	Performance IC Advance Mark10 Dimming 120v	26w Quad/Triple 32w Triple
		1101FDICMX2/N	Performance IC Advance Mark10 Dimming 277v	26w Quad/Triple 32w Triple

1101HCB Uniframe CFL 6 3/4"

Horizontal Cross Blade Trim

Features

- Reflector:** Formed aluminum. Matte White flange.
- Finishes:** WH = Matte White Paint
A = Aluminum Paint
- Cross Blade:** .050" thick aluminum "floating" cross blade painted white or aluminum.


4. Performance Data: 60° Cutoff angle.

See attached photometric reports for distribution and efficiency data.
Go to www.lightolier.com for .IES files.

Labels

cULus Listed. Suitable for Damp Locations. I.B.E.W.

32W TRIPLE TUBE LAMP, LUMEN RATING = 2200 LMS, ELECTRONIC BALLAST, WHITE CROSS BLADE

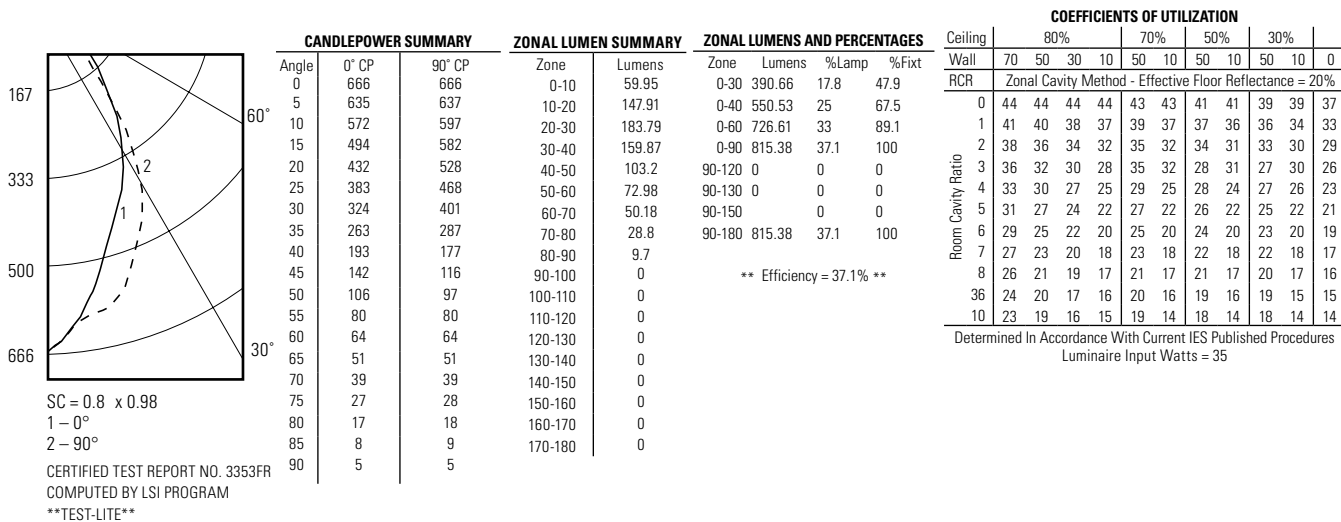

42W TRIPLE TUBE LAMP, LUMEN RATING = 3200 LMS, ELECTRONIC BALLAST, WHITE CROSS BLADE

