

LIGHTOLIER



by  Signify

Downlighting

Uniframe CFL 6 3/4"

1101HSW Horizontal Wall Wash Trim

 UNIFRAME

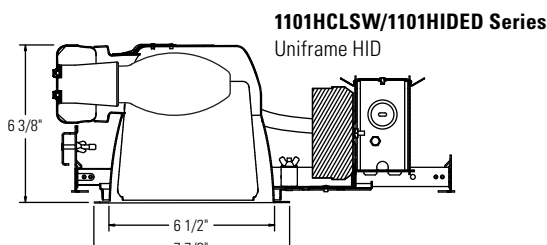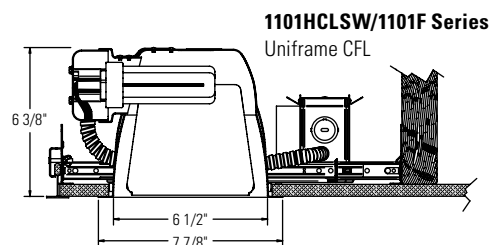

Project: _____
Location: _____
Cat.No: _____
Type: _____
Lamps: _____ Qty: _____
Notes: _____

Complete Fixture consists of Frame-In Kit and Reflector Trim. Select each separately.

Uniframe Performance Series Reflector Trims		Compatible Compact Fluorescent Frame-In Kits (See Individual Frame-In Kit Specification Sheets)		
Catalog No.	Description	Catalog No.	Installation Type	Lamping
1101HCLSW	6-3/4" Horizontal Single Wall Wash – Specular Clear	1101F18U	Uniframe Non-IC 120/277v	18w Quad/Triple
		1101FR18U	Uniframe Non-IC Remodeler 120/277v	
	6-3/4" Horizontal Single Wall Wash – Clear Diffuse	1101FD26L1	Uniframe Non-IC Lutron Dimming 120v	26w Quad/Triple
		1101FD26L2	Uniframe Non-IC Lutron Dimming 277v	
	6-3/4" Horizontal Single Wall Wash – Matte White	1101FD32L1	Uniframe Non-IC Lutron Dimming 120v	32w Triple
		1101FD32L2	Uniframe Non-IC Lutron Dimming 277v	
		1101F2642U	Uniframe Non-IC 120/277v	26w Quad/Triple
		1101FR2642U	Uniframe Non-IC Remodeler 120/277v	32w Triple
		1101F2642UEM	Uniframe Non-IC Emergency 120/277v	42w Triple
		1101FD2642MX1	Uniframe Non-IC Advance Mark10 Dimming 120v	
		1101FD2642MX2	Uniframe Non-IC Advance Mark10 Dimming 277v	
		1101FD2642M7U	Uniframe Non-IC Advance Mark7 Dimming 120/277v	
		1101FR264MX1	Uniframe Non-IC Advance Mark10 Dimming 120v Rem.	
		1101FR264MX2	Uniframe Non-IC Advance Mark10 Dimming 277v Rem.	
1101HCDSW	6-3/4" Horizontal Single Wall Wash – Specular Clear	1101F18ICU/N	Performance IC 120/277v	18w Quad/Triple
		1101F2642ICU	Performance IC 120/277v	26w Quad/Triple
	6-3/4" Horizontal Single Wall Wash – Clear Diffuse	1101F2642IUN		32w Triple
				42w Triple
	6-3/4" Horizontal Single Wall Wash – Matte White	1101FDICMX1/N	Performance IC Advance Mark10 Dimming 120v	26w Quad/Triple
				32w Triple
		1101FDICMX2/N	Performance IC Advance Mark10 Dimming 277v	26w Quad/Triple
				32w Triple
		Compatible HID Uniframe Frame-In Kits (See Individual Frame-In Kit Specification Sheets)		
		1101HIDED50U	Non-IC	50W ED17 Open
		1101HIDED70U		70W ED17 Open
		1101HIDED100U		100W ED17 Open
	6-3/4" Horizontal Single Wall Wash – Matte White	1101HIDED50ULC	Non-IC Chicago Plenum	50W ED17 Open
		1101HIDED70ULC		70W ED17 Open
		1101HIDED100ULC		100W ED17 Open

*Not listed for HID

1101HSW Uniframe CFL 6 3/4"

Horizontal Wall Wash Trim

Features

- Reflector:** Formed aluminum. Matte White flange.
- Finishes:** CL = Specular Clear (Iridescent Free coating)
CD = Clear Diffuse
WH = Matte White Paint
- Wall Wash Kick Reflector:** Formed aluminum. Clear finish.

- Performance Data:** 60° Cutoff angle.


See attached photometric reports for distribution and efficiency data.
Go to www.lightolier.com for .IES files.

Labels

cULus Listed. Suitable for Damp Locations. I.B.E.W.

Lighting Data

Footcandles On Wall: Multiple Units

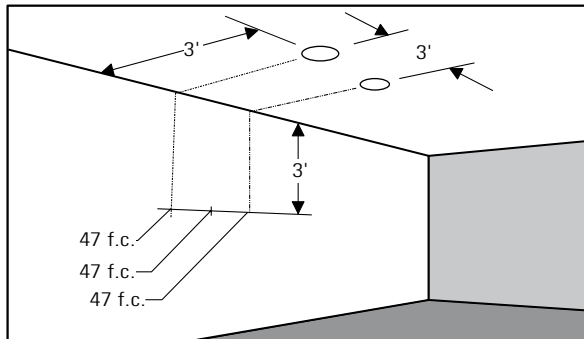

EXAMPLE: 42w with multiple clear reflector units located 3' from wall and spaced 3' on center, the illumination on the wall 3' down from ceiling will be 47 f.c. beneath units and 47 f.c. between units.

42w G.E. Triple Biax

	3' On Center			4' On Center		
Distance From Ceiling in Feet	1	2	3	1	2	3
1	22	20	22	7	6	7
2	47	48	47	21	20	21
3	47	47	47	29	30	29
4	35	34	35	26	26	26
5	28	28	28	21	20	21
6	22	22	22	18	17	18
7	17	17	17	15	15	15
8	14	14	14	14	14	14
9	11	11	11	10	10	10

32w G.E. Triple Biax

	3' On Center			4' On Center		
Distance From Ceiling in Feet	1	2	3	1	2	3
1	17	14	17	6	4	6
2	35	36	35	16	14	16
3	37	36	37	22	23	22
4	28	28	28	21	20	21
5	22	22	22	16	17	16
6	18	18	18	14	13	14
7	14	14	14	12	12	12
8	11	11	11	10	10	10
9	9	9	9	8	8	8

26w G.E. Triple Biax 2' From Wall-2' On Center 3' From Wall-3' On Center

	2' On Center			3' On Center		
Distance From Ceiling in Feet	1	2	3	1	2	3
1	49	44	49	13	11	13
2	64	62	64	26	28	26
3	43	43	43	29	28	29
4	30	30	30	21	21	21
5	21	22	21	17	17	17
6	16	16	16	13	14	13
7	11	11	11	11	11	11
8	9	9	9	9	9	9
9	7	7	7	7	7	7

26w Sylvania Quad Tube 2' From Wall-2' On Center 3' From Wall-3' On Center

	2' On Center			3' On Center		
Distance From Ceiling in Feet	1	2	3	1	2	3
1	39	36	39	10	9	10
2	49	53	49	21	21	21
3	36	34	36	22	23	22
4	25	25	25	18	17	18
5	18	19	18	14	14	14
6	13	13	13	11	11	11
7	9	9	9	9	9	9
8	7	7	7	7	7	7
9	5	5	5	6	6	6


Footcandle values are initial, rounded off and based on minimum of six units.

1101HSW Uniframe CFL 6 3/4"

Horizontal Wall Wash Trim


Reflector Trim:	1101HCLSW
Report No.:	4055FR
Lamp:	100W ED17 Coated Metal Halide
Initial lumens:	7900 lms
Efficiency:	61.0%

Lighting Data Footcandles On Wall: Multiple Units

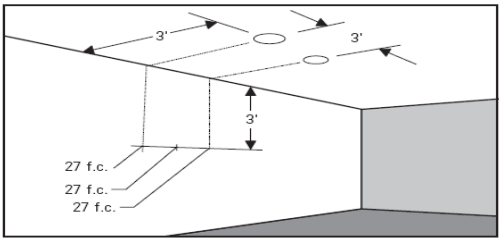

EXAMPLE: With multiple clear reflector units located 3' from wall and spaced 3' on center, the illumination on the wall 3' down from ceiling will be 107 f.c. beneath units and 118 f.c. between units.


Luminaires 3' from Wall



Distance From Ceiling in Feet


1'	46	31	46
2'	85	81	85
3'	107	118	107
4'	96	104	96
5'	79	78	79
6'	57	61	57
7'	43	47	43
8'	34	36	34
9'	27	28	27
10'	21	22	21
11'	17	18	17
12'	14	14	14
13'	11	12	11
14'	9	10	9

Luminaires 4' from Wall



1'	16	12	16
2'	39	31	39
3'	50	55	50
4'	60	65	60
5'	56	62	56
6'	50	50	50
7'	41	41	41
8'	32	34	32
9'	26	29	26
10'	21	23	21
11'	18	19	18
12'	15	16	15
13'	13	13	13
14'	11	11	11

Luminaires 4' from Wall



1'	15	8	15
2'	36	21	36
3'	43	40	43
4'	44	54	44
5'	42	52	42
6'	37	43	37
7'	33	34	33
8'	28	29	28
9'	22	24	22
10'	18	21	18
11'	15	18	15
12'	13	15	13
13'	11	12	11
14'	10	10	10

Average footcandle values shown are initial and are based on a minimum of four units.

