

Project: _____

Location: _____

Cat.No: _____

Type: _____



Lamps: _____ Qty: _____

Notes: _____



1101CLSW/1101F Series
Uniframe CFLWW

1101CLSW/1101HIDED Series
Uniframe HIDWW

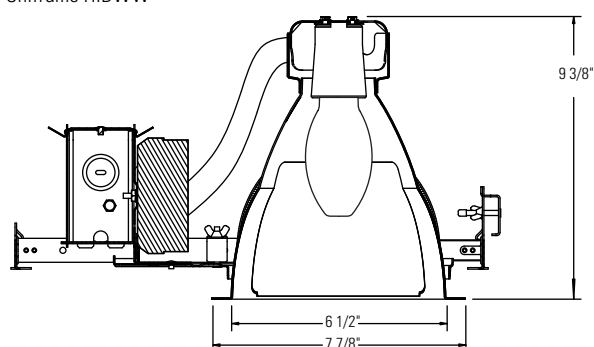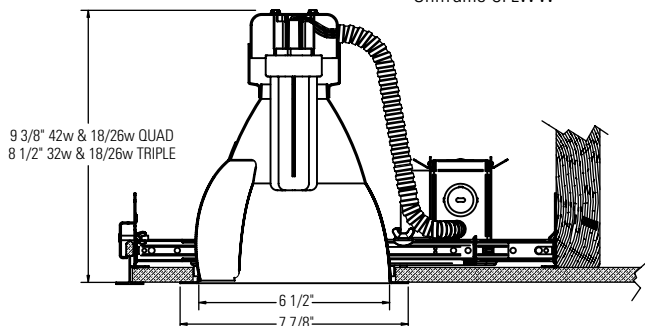

Complete Fixture consists of Frame-In Kit and Reflector Trim. Select each separately.

Uniframe Performance Series Reflector Trims

Compatible Compact Fluorescent Uniframe Frame-In Kits (See Individual Frame-In Kit Specification Sheets)

Catalog No.	Description	Catalog No.	Installation Type	Lamping
1101CLSW 1101CDSW 1101WHSW*	6-3/4" Vertical Single Wall Wash – Specular Clear 6-3/4" Vertical Single Wall Wash – Clear Diffuse 6-3/4" Vertical Single Wall Wash – Matte White	1101F18U 1101FR18U	Non-IC 120/277v Non-IC Remodeler 120/277v	18w Quad/Triple
		1101FD26L1 1101FD26L2	Non-IC Lutron Dimming 120v Non-IC Lutron Dimming 277v	26w Quad/Triple
		1101FD32L1 1101FD32L2	Non-IC Lutron Dimming 120v Non-IC Lutron Dimming 277v	32w Triple
		1101F2642U 1101FR2642U 1101F2642UEM 1101FD2642MX1 1101FD2642MX2 1101FD2642M7U 1101FR264MX1 1101FR264MX2	Non-IC 120/277v Non-IC Remodeler 120/277v Non-IC Emergency 120/277v Non-IC Advance Mark10 Dimming 120v Non-IC Advance Mark10 Dimming 277v Non-IC Advance Mark7 Dimming 120/277v Non-IC Advance Mark10 Dimming 120v Rem. Non-IC Advance Mark10 Dimming 277v Rem.	26w Quad/Triple 32w Triple 42w Triple
		Compatible HID Uniframe Frame-In Kits (See Individual Frame-In Kit Specification Sheets)		
		1101HIDED50U	Non-IC	50W ED17 Open
		1101HIDED70U		70W ED17 Open
		1101HIDED100U		100W ED17 Open
		1101HIDED50ULC	Non-IC Chicago Plenum	50W ED17 Open
		1101HIDED70ULC		70W ED17 Open
		1101HIDED100ULC		100W ED17 Open

*Not listed for HID

*Not listed for HID

1101SW Uniframe CFL 6 3/4"

Vertical Wall Wash Trim

Features

- Reflector:** Formed aluminum. Matte White flange.
- Finishes:** CL = Specular Clear (Iridescent Free coating)
CD = Clear Diffuse
WH = Matte White Paint
- Wall Wash Kick Reflector:** Formed aluminum. Clear finish.


- Performance Data:** 60° Cutoff angle.

See attached photometric reports for distribution and efficiency data.
Go to www.lightolier.com for .IES files.


Labels

cULus Listed. Suitable for Damp Locations. I.B.E.W.

Lighting Data Footcandles On Wall: Multiple Units

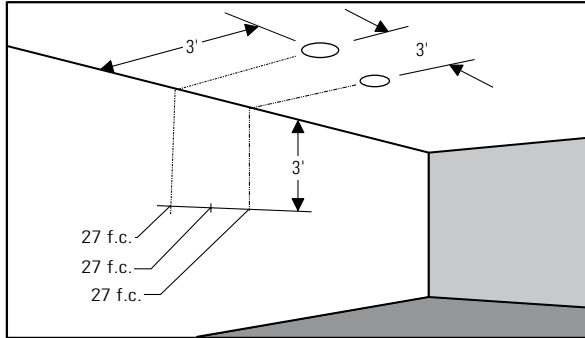

EXAMPLE: 42w with multiple clear reflector units located 3' from wall and spaced 3' on center, the illumination on the wall 3' down from ceiling will be 27 f.c. beneath units and 27 f.c. between units.

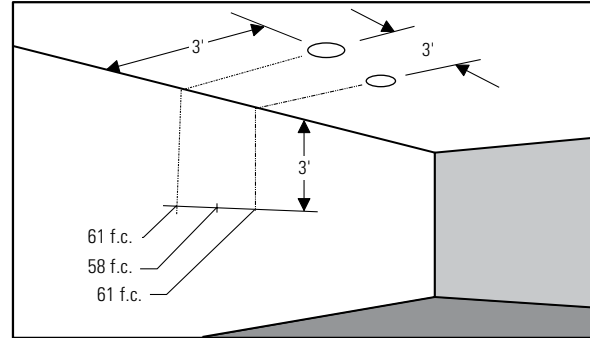

EXAMPLE: 42w with multiple clear reflector units located 3' from wall and spaced 3' on center, the illumination on the wall 3' down from ceiling will be 47 f.c. beneath units and 47 f.c. between units.

42w Triple Tube Lamp

3' from Wall - 3' On Center

Distance From Ceiling in Feet	1'	2'	3'	4'	5'	6'	7'	8'	9'
1'	12	11	12						
2'	22	21	22						
3'	27	27	27						
4'	29	29	29						
5'	27	27	27						
6'	23	23	23						
7'	19	19	19						
8'	16	16	16						
9'	13	14	13						

3' from Wall - 4' On Center

Distance From Ceiling in Feet	1'	2'	3'	4'	5'	6'	7'	8'	9'
1'	10	7	10						
2'	18	14	18						
3'	21	20	21						
4'	23	21	23						
5'	21	20	21						
6'	18	17	18						
7'	15	15	15						
8'	13	13	13						
9'	11	11	11						

32w Triple Tube Lamp

3' from Wall - 3' On Center

Distance From Ceiling in Feet	1'	2'	3'	4'	5'	6'	7'	8'	9'
1'	13	12	13						
2'	22	21	22						
3'	25	24	25						
4'	23	24	23						
5'	20	20	20						
6'	16	16	16						
7'	13	13	13						
8'	10	10	10						
9'	8	8	8						

3' from Wall - 4' On Center

Distance From Ceiling in Feet	1'	2'	3'	4'	5'	6'	7'	8'	9'
1'	11	8	11						
2'	17	14	17						
3'	19	18	19						
4'	18	17	18						
5'	15	15	15						
6'	13	12	13						
7'	10	10	10						
8'	8	8	8						
9'	7	7	7						

100W ED17 Coated Metal Halide

Luminaires 3' from Wall

Distance From Ceiling in Feet	1'	2'	3'	4'	5'	6'	7'	8'	9'	10'	11'	12'	13'	14'
1'	27	24	27											
2'	45	43	45											
3'	61	58	61											
4'	71	68	71											
5'	66	65	66											
6'	55	5	55											
7'	44	45	44											
8'	35	36	35											
9'	28	28	28											
10'	22	23	22											
11'	18	18	18											
12'	15	15	15											
13'	12	12	12											
14'	10	10	10											

Reflector Trim: 1101CLSW
Report No.: 4053FR
Initial lumens: 7900 lms
Efficiency: 62.0%

Luminaires 3' from Wall

Distance From Ceiling in Feet	1'	2'	3'	4'	5'	6'	7'	8'	9'	10'	11'	12'	13'	14'
1'	22	16	22											
2'	36	30	36											
3'	47	42	47											
4'	54	51	54											
5'	51	50	51											
6'	43	44	43											
7'	36	37	36											
8'	29	17	29											
9'	24	14	24											
10'	20	23	20											
11'	16	18	16											
12'	13	15	13											
13'	11	12	11											
14'	9	10	9											

Luminaires 4' from Wall

Distance From Ceiling in Feet	1'	2'	3'	4'	5'	6'	7'	8'	9'	10'	11'	12'	13'	14'
1'	11	9	11											
2'	21	20	21											
3'	27	25	27											
4'	34	32	34											
5'	39	37	39											
6'	39	38	39											
7'	36	35	36											
8'	31	31	31											
9'	26	26	26											
10'	22	22	22											
11'	19	19	19											
12'	16	16	16											
13'	13	14	13											
14'	11	12	11											

Footcandle values are initial, rounded off and based on minimum of four units.


1101SW Uniframe CFL 6 3/4"

Vertical Wall Wash Trim

26w Triple Tube Lamp


3' from Wall - 3' On Center

Distance From Ceiling in Feet

			
1'	13	12	13
2'	26	28	26
3'	29	29	29
4'	22	22	22
5'	17	17	17
6'	13	14	13
7'	11	11	11
8'	9	9	9
9'	7	7	7

3' from Wall - 4' On Center

Distance From Ceiling in Feet

			
1'	12	6	12
2'	22	19	22
3'	20	23	20
4'	16	17	16
5'	12	13	12
6'	10	10	10
7'	9	9	9
8'	7	7	7
9'	6	6	6

