

LIGHTOLIER




by  Signify

Downlighting

Uniframe CFL 3 3/4"

2001FIC 1 Light AirSeal IC Frame

Project: _____
 Location: _____
 Cat.No: _____
 Type: _____
 Lamps: _____ Qty: _____
 Notes: _____

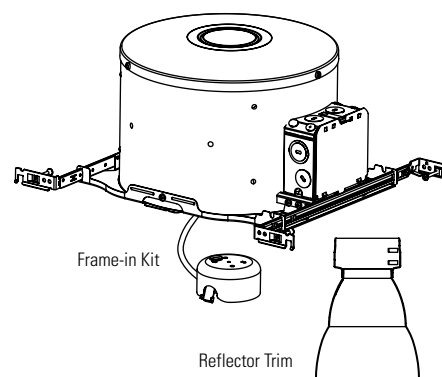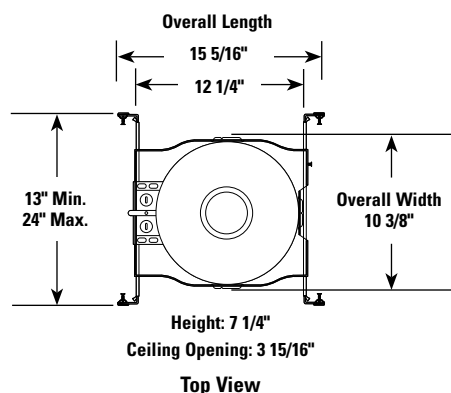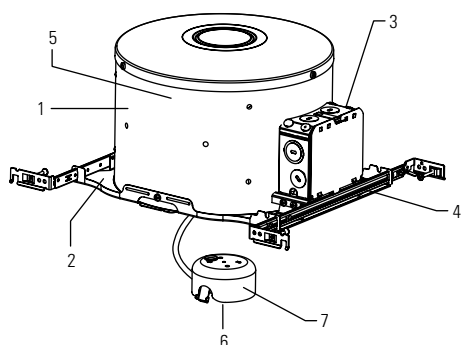

Complete Fixture consists of Frame-In Kit and Reflector Trim. Select each separately.

Frame-In Kit	Uniframe™ Compact Fluorescent Performance Series Reflector Trims				
	Vertical Open	Vertical Wall Wash - Single	Vertical Wet Location Clear Lens	Vertical Wet Location Fresnel Lens	Vertical Wet Location Opal Lens
2001F131CU* 13w Quad/Triple GX24q-1 Base 120v – 0.13amp max 277v – 0.06amp max	2001CL 2001CD 2001WH	2001CLSW 2001CDSW 2001WHSW	2001CLC 2001CDC 2001WHC	2001CLF 2001CDF 2001WHF	2001CLO 2001CDO 2001WHO
2001F181CU* 18w Triple GX24q-2 Base 120v – 0.16amp max 277v – 0.07amp max					

*Add N to catalog number for preset nails.

2001FIC Uniframe CFL 3 3/4"

1 Light AirSeal IC Frame

Features

- 1. Housing:** .028" (#21ga.) aluminum. UL listed for direct contact with thermal insulation. AirSeal® housing minimizes air leakage to less than 2 CFM at 1.57 PSF (or 75pa), which complies with Model Energy Code (Section 602.3.3) and Washington State Energy Code (Section 502.4) and reduces heat loss and condensation in ceiling. Access door for inspection of junction box.
- 2. Mounting Frame:** .032" (#22 ga.) galvanized steel. Accommodates ceilings up to 1 1/2" thick. 3/8" deep integral lip. Locks into position along length of mounting bars with locking screw and bendable slot. Four slots are positioned 90° apart to simplify alignment. Push-in/twist-out roto-clips hold reflector flush to ceiling.
- 3. Junction Box:** 2" X 4" X 3 1/2" (22 cu. in.) .032" (#22 ga.) galvanized steel. UL listed for maximum of 8 (#12 ga.) 90°C through branch circuit conductors.
- 4. Mounting Bars:** .059" (#16 ga.) galvanized steel. Bars pivot for easy attachment and wire-in below ceiling line. Bars extend to accommodate 16" to 24" O.C. joist spacing. Bars can accommodate 12" O.C joist spacing after a slight field modification (see Instruction Sheet). Features integral self tapping phillips screws for secure attachment to wood or metal construction. Attaches to T-bar ceilings without the need of accessories.
- 5. Ballast:** Mounted inside housing. 120V – 277V UL Listed Electronic Ballast, end of lamp life protection, class "P" thermally protected, class "A" sound rating.
- 6. Socket:** Four-pin base, molded thermoplastic socket, prewired with No. 18 AWM leads to ballast.
- 7. Socket Housing:** .036" (#20ga.) Galvanized Steel housing attaches to reflector trim by spring clip for precise optic alignment.

Options & Accessories

Extra-Thick Ceiling

Mounting Ring: 1967B - 1 1/4" to 2" thick ceilings

Labels

cULus Listed (Type I.C., Suitable for Damp Location), I.B.E.W.

Complies with Air Leakage Requirements stated in the Model Energy Code and the Washington State Energy Code.

