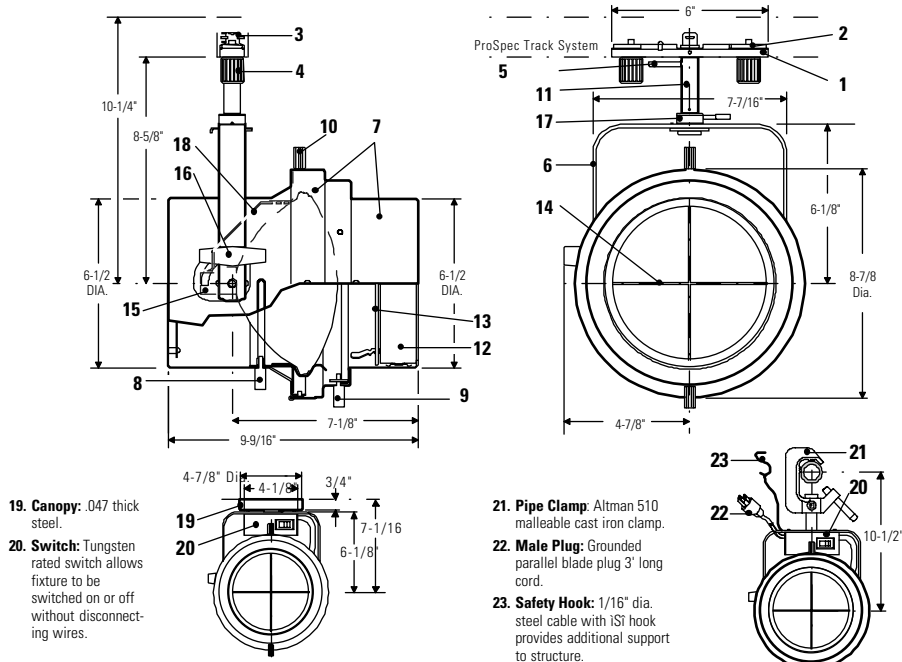




19. Canopy: .047 thick steel.
20. Switch: Tungsten rated switch allows fixture to be switched on or off without disconnecting wires.

21. Pipe Clamp: Altman 510 malleable cast iron clamp.
22. Male Plug: Grounded parallel blade plug 3' long cord.
23. Safety Hook: 1/16" dia. steel cable with ISI hook provides additional support to structure.

Canopy Mount 26056WHCY/26056BKCY

Pipe Clamp 26056WHPC/26056BKPC

Ordering Information

Catalog No.	Finishes	Mountings	Approx. Wt.	Lamps
26056 WH	Matte White	ProSpec™ Track System	5.6 lbs. (w/lamp, 2 lenses & crossblade)	PAR56
26056 BK	Matte Black	Ceiling, Vertical Wall and Horizontal Wall		120V Mogul
26056 WHCY	Matte White	Canopy mounted over a 4" Octagon Junction Box, Ceiling or Wall	5.8 lbs. (w/lamp, 2 lenses & crossblade)	End Prong
26056 BKCY	Matte Black	(or other electrical box with 3.5" mounting centers. 4 7/8" dia. fixture canopy must cover J-box)		500W max.
26056 WHPC	Matte White	Pipe Clamp: Fits Round Pipes. 3/4" to 1 1/2" nominal pipe size. Horizontal or Vertical pipe.	7.5 lbs. (w/lamp, 2 lenses & crossblade)	(not included)
26056 BKPC	Matte Black	Note: 3/4" nominal pipe measures 1.05" O.D., 1 1/2" nominal pipe measures 1.90" O.D.		

Features

- Track Attachment Fitting:** Machined aluminum. Polarity is not a concern with ProSpec track because of its symmetrical positioning of circuits within the track, adapter is reversed to access one or the other circuit.
- Steel Clamping Toggles:** 1/8" thick plated steel with 1/4 - 20 thread secures fixture mechanically to track.
- Electrical Post:** .20 x .032 thick brass contacts enclosed in a high temperature thermoplastic insulator.
- Clamping Knobs:** Rotation of clamping knobs secures steel clamping toggles to track.
- Lever:** Solid steel. Energizes fixture electrically by 90° rotation.
- Yoke:** 1/8" thick x 1" wide solid steel.
- Housing:** 1/16" thick aluminum.
- Lamp Adjustment Knob:** Knurled steel. Can be moved in housing slot to rotate lamp 180°. Knob is tightened to lock lamp in desired position.
- Accessory Locking Knob:** Knurled steel. Locks accessory cartridge in desired position after adjustments.
- Lamp Access Knob:** Knurled steel. Locks front housing to fixture. Loosening provides access for adding accessories and lamp replacement.
- Stem:** 5/8" O.D. x .048" wall steel.
- Accessory Cartridge:** Can be rotated 360° and locked into position.
- Lamp Guard:** Tempered clear glass. Required for safety.
- Cross Blade:** .07" thick x 1 3/8" deep steel blades matte black finish, removable.
- Lampholder:** High temperature ceramic mogul end prong base with high temperature #18 gauge fiberglass sleeved wire.
- Fixture Rotation Knob:** High temperature plastic. When loose, allows fixture to be rotated. When tight the fixture is locked into position.
- Horizontal Lock:** Steel collar when tightened locks the fixture in its horizontal position.
- Lamp Guide:** 1/16" thick steel. Ensures lamp is seated properly in fixture.
- Visual Cutoff:** 57° at 0° fixture aiming.

Finish

All painted finishes are baked enamel.

Options & Accessories

(2) Accessories max. Use 6 1/4" UV, PF, SY, LF, IR, AS, AS7LS and AL7HC plus 6 1/4" color filters.

Electrical

Input to fixture must be 120V rms at 60Hz.

26056PC plugs into grounded parallel blade receptacle.

26056CY fixture wires: 18 ga. stranded SF-1. Supply wire must be rated at least 90°C and min. 6 amps capacity.

Labels

UL, I.B.E.W., Not For Residential Use.

Teflon® is a registered trademark of E.I. DuPont.

Job Information

Type:

Job Name:

Cat. No.:

Lamp(s):

Notes:

Lightolier a Genlyte company

631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710

We reserve the right to change details of design, materials and finish.

© 2005 Genlyte Group LLC • B0705




www.lightolier.com

LIGHTOLIER®

**Lighting Data****Aiming Angle:**

L Beam length
W Beam width
C Distance to center of beam
D Distance
A Aiming angle
FC Footcandles

L and **W** are the outer points where the candlepower drops to 50% of the maximum. **FC** are the initial foot-candles at the center of the beam.

0°**30° 45° or 60° Horizontal****30° 45° or 60° Vertical****LAMP**

Beam Spread
 50% Max CP
 Beam Center
 C.P. Candels
 Rated
 Life-Hrs

	52,000	2000
	18,000	2000
	68,000	2000
	24,000	2000
	11,000	2000
	96,000	4000
	43,000	4000
	19,000	4000

0° AIMING ANGLE

D	FC	L	W
15'	231	1.8'	2.4'
20'	130	2.4'	3.1'
25'	83	3.1'	3.9'
30'	58	3.7'	4.7'
8'	281	1.4'	2.8'
12'	125	2.1'	4.2'
16'	70	2.8'	5.6'
20'	45	3.5'	7.1'
15'	302	2.1'	2.6'
20'	170	2.6'	3.5'
25'	109	3.5'	4.4'
30'	76	4.2'	5.2'
10'	240	1.9'	4.1'
15'	107	2.9'	6.1'
20'	60	3.9'	8.1'
25'	38	4.6'	10.2'
8'	172	2.5'	5.4'
12'	76	3.8'	8.0'
16'	43	5.1'	10.7'
20'	28	6.3'	13.4'
16'	375	2.2'	3.6'
24'	167	3.4'	5.5'
32'	94	4.5'	7.7'
40'	60	5.6'	9.9'
15'	191	2.6'	6.9'
20'	108	3.5'	9.2'
25'	69	4.4'	11.5'
30'	48	5.2'	13.9'
8'	297	2.8'	6.5'
12'	132	4.2'	9.7'
16'	74	5.6'	12.9'
20'	48	7.1'	16.2'

A=30° AIMING ANGLE

D	C	FC	L	W
10'	5.8'	338	1.6'	1.8'
15'	8.7'	150	2.4'	2.7'
20'	11.5'	84	3.3'	3.6'
25'	14.4'	54	4.1'	4.5'
7'	4.0'	239	1.6'	2.9'
10'	5.8'	117	2.3'	4.1'
13'	7.5'	69	3.0'	5.3'
16'	9.2'	46	3.7'	6.5'
10'	5.6'	442	1.9'	2.0'
15'	8.7'	196	2.8'	3.0'
20'	11.5'	110	3.7'	4.0'
25'	14.4'	71	4.7'	5.1'
8'	4.6'	244	2.1'	3.8'
12'	6.9'	109	3.1'	5.6'
16'	9.2'	61	4.1'	7.5'
20'	11.5'	39	5.2'	9.4'
7'	4.0'	146	3.0'	5.4'
10'	5.8'	71	4.3'	7.7'
13'	7.5'	42	5.5'	10.0'
16'	9.2'	28	6.8'	12.4'
12'	6.9'	433	2.2'	3.2'
20'	11.5'	156	3.7'	5.3'
28'	16.2'	80	5.2'	7.4'
36'	20.8'	48	6.7'	9.5'
10'	5.6'	278	2.3'	5.3'
15'	8.7'	124	3.5'	8.0'
20'	11.5'	70	4.7'	10.7'
25'	14.4'	45	5.8'	13.3'
7'	4.0'	252	3.3'	6.5'
10'	5.8'	123	4.8'	9.3'
13'	7.5'	73	6.2'	12.1'
16'	9.2'	48	7.6'	14.9'

A=45° AIMING ANGLE

D	C	FC	L	W
8'	8.0'	287	2.0'	1.8'
12'	12.0'	128	2.9'	2.7'
16'	16.0'	72	3.9'	3.6'
20'	20.0'	46	4.9'	4.5'
5'	5.0'	255	1.8'	2.5'
7'	7.0'	130	2.5'	3.5'
9'	9.0'	79	3.2'	4.5'
11'	11.0'	53	3.9'	5.5'
8'	8.0'	376	2.2'	2.0'
12'	12.0'	167	3.4'	3.0'
16'	16.0'	94	4.5'	4.0'
20'	20.0'	60	5.6'	4.9'
6'	6.0'	236	2.3'	3.5'
9'	9.0'	105	3.5'	5.2'
12'	12.0'	69	4.7'	6.9'
15'	15.0'	38	5.8'	8.6'
5'	5.0'	156	3.2'	4.7'
7'	7.0'	79	4.5'	6.6'
9'	9.0'	48	5.8'	8.5'
11'	11.0'	32	7.1'	10.4'
10'	10.0'	339	2.8'	3.2'
15'	15.0'	151	4.2'	4.8'
20'	20.0'	85	5.6'	6.4'
25'	25.0'	54	7.0'	8.1'
8'	8.0'	238	2.8'	5.2'
12'	12.0'	106	4.2'	7.8'
16'	16.0'	59	5.6'	10.4'
20'	20.0'	38	7.1'	13.1'
5'	5.0'	269	3.6'	5.7'
7'	7.0'	137	5.1'	6.0'
9'	9.0'	83	6.6'	10.3'
11'	11.0'	56	8.0'	12.6'

A=60° AIMING ANGLE

D	C	FC	L	W
5'	8.7'	260	2.5'	1.6'
8'	13.9'	102	4.0'	2.5'
11'	19.1'	54	5.4'	3.5'
14'	24.2'	33	6.9'	4.4'
3'	5.2'	250	2.1'	2.1'
4'	6.9'	141	2.9'	2.8'
5'	8.7'	90	3.6'	3.5'
6'	10.4'	63	4.3'	4.2'
5'	8.7'	340	2.8'	1.7'
8'	13.9'	133	4.5'	2.8'
11'	19.1'	70	6.2'	3.8'
14'	24.2'	43	7.9'	4.9'
4'	6.9'	188	3.2'	1.7'
6'	10.4'	83	4.8'	2.8'
8'	13.9'	47	6.3'	3.8'
10'	17.3'	30	7.9'	4.9'
3'	5.2'	153	4.1'	4.0'
4'	6.9'	66	5.5'	5.4'
5'	8.7'	55	6.9'	6.7'
6'	10.4'	38	8.2'	8.0'
6'	10.4'	333	3.4'	2.7'
10'	17.3'	120	5.7'	4.6'
14'	24.2'	61	7.9'	6.4'
18'	31.2'	37	10.2'	8.2'
5'	8.7'	215	3.6'	4.6'
8'	13.9'	84	5.7'	7.4'
11'	19.1'	44	7.9'	10.2'
14'	24.2'	27	10.0'	12.9'
3'	5.2'	264	4.7'	4.8'
4'	6.9'	148	6.2'	6.5'
5'	8.7'	95	7.8'	8.1'
6'	10.4'	66	9.3'	9.7'

Job Information**Type:**

Lightolier a Genlyte company

www.lightolier.com

631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710

We reserve the right to change details of design, materials and finish.

© 2005 Genlyte Group LLC • B0705

LIGHTOLIER®