

Ordering Information

Catalog No.	Finishes	Mountings	Lamps
26230W WH	Matte White	ProSpec™ Track System	PAR30 75W Max. (Short Neck)
26230W BK	Matte Black		

Features

- Track attachment fitting:** Die-cast aluminum with separate mechanical and electrical functions. Fitting cannot be engaged or disengaged while fixture is powered. Polarity is not a concern with ProSpec track because of its symmetrical positioning of circuits within the track, adapters are reversed to access one or the other circuit.
- Stem:** 5/8" O.D. .049" wall, stainless steel.
- Horizontal Locking feature:** Machined knob mechanisms permit the locking of horizontal aiming position. Adjustment range is: horizontal 0-350°. Indicator guide with 45° intervals allows precise fixture aiming.
- Vertical Locking feature:** Machined knob mechanisms permit the locking of vertical aiming position. Adjustment range is: vertical 0° (nadir) - 90°. Indicator guide with 15° intervals allows precise fixture aiming.
- Lampholder:** Porcelain, medium base, nickel plated screw shell, #18 ga. braided SF-1 leads.
- Housing:** 20 ga. (.036) steel.
- Lamp and accessory support:** .032 steel, flared for easy entry of reflector assembly, matte black finish.
- Kick reflector assembly:** Holds one accessory behind the spread lens; example: color filter, UV filter, Heat filter. Assembly is removable from front using a twist and lock motion.
- Reflector:** Embossed texture anodized aluminum; reflects light towards upper portion of wall and ceiling line.
- Lever:** Energizes fixture by 90° rotation.
- Clamping tabs:** Expands or releases gripper springs from track ledge; gripper springs hold attachment fitting securely within track.

Finish

All painted finishes are powder coated baked enamel.

Options & Accessories

Accessories: 3 3/4" dia. series. Filters, lenses, screens and louvers. Holds one accessory behind the spread lens. Order accessories separately.

Electrical

Electrical components: Polycarbonate moldings.
Contacts: Heavy gauge 1/2 hard brass developed for Lightolier's "U" shaped track conductors.

Labels

UL; I.B.E.W.

Job Information	Type:
Job Name:	
Cat. No.:	
Lamp(s):	
Notes:	


Lightolier a Genlyte Thomas Company
631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710
We reserve the right to change details of design, materials and finish.
© 2002 Genlyte Thomas Group LLC (Lightolier Division) • A0902

LIGHTOLIER®



Lighting Data

FOOTCANDLES ON WALL:

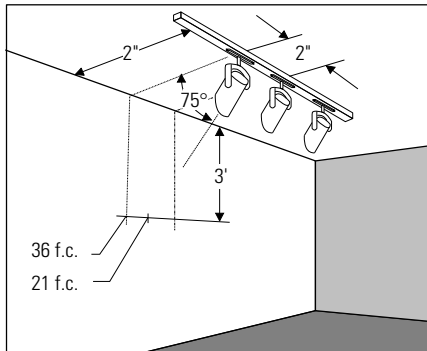

EXAMPLE: With track located 2' from wall and multiple units spaced 2' on center and aimed 75° from horizontal, the illumination on wall 3' from ceiling will be 36 f.c. beneath units and 21 f.c. between units.

Multiple Units 75W PAR 30 FL

Track 2' from Wall-- 2' and 3' On Center			
Distance From Ceiling in Feet	2' On Center	3' On Center	4' On Center
1'	14	8	15
2'	28	13	28
3'	36	21	36
4'	31	21	31
5'	28	14	28
6'	13	9	13
7'	9	7	9
8'	7	5	7
9'	5	4	5

Track 3' from Wall-- 3' and 4' On Center			
Distance From Ceiling in Feet	3' On Center	4' On Center	5' On Center
1'	8	4	8
2'	19	18	19
3'	36	17	37
4'	38	15	38
5'	18	18	18
6'	11	7	11
7'	7	5	7
8'	4	3	4
9'	3	2	3

Footcandles are average and rounded off and are based on a minimum of five units.
For 50W PAR 30 FL, multiply footcandles by 0.55.

Job Information

Type:

Lightolier a Genlyte Thomas Company www.lightolier.com
631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710
We reserve the right to change details of design, materials and finish.
© 2002 Genlyte Thomas Group LLC (Lightolier Division) • A0902

LIGHTOLIER®