
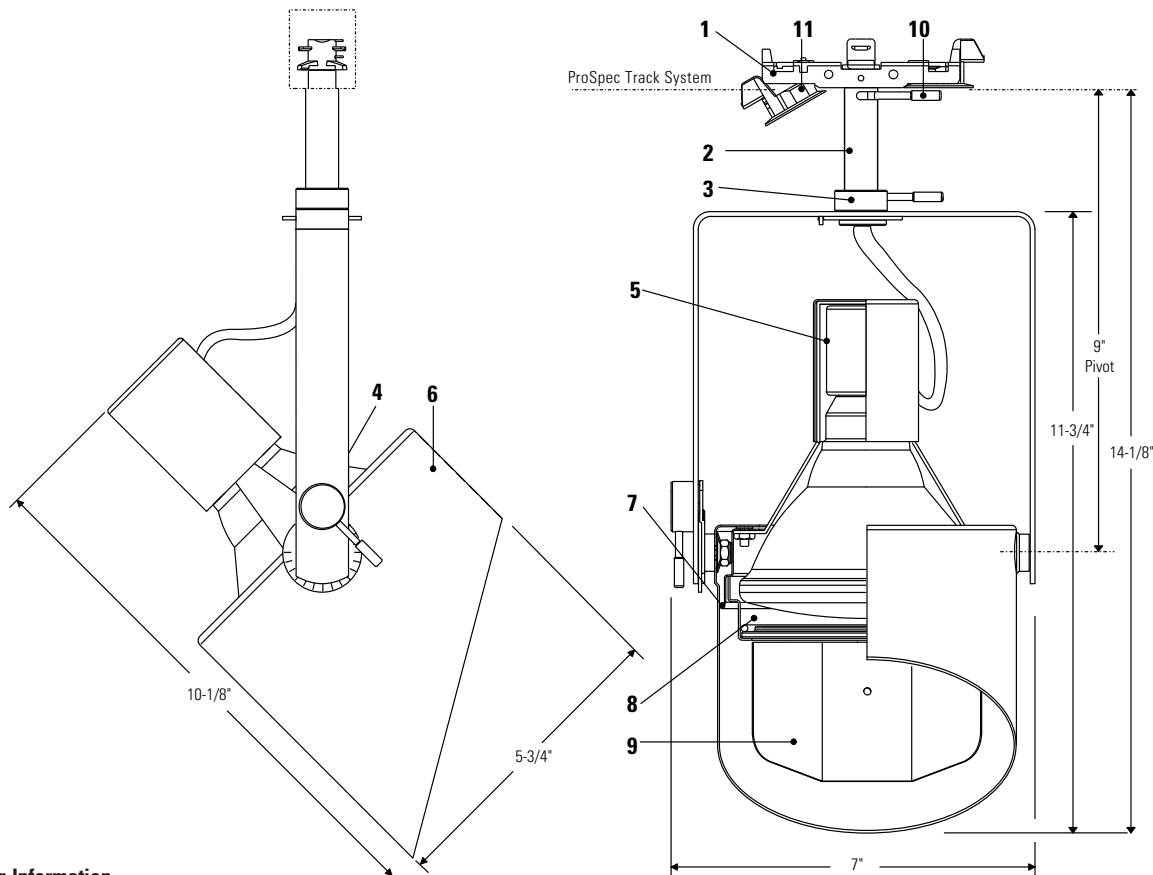




Ordering Information

Catalog No.	Finishes	Mountings	Lamps
26238W WH	Matte White	ProSpec™ Track System	PAR38 250W Max.
26238W BK	Matte Black		

Features

- Track attachment fitting:** Die-cast aluminum with separate mechanical and electrical functions. Fitting cannot be engaged or disengaged while fixture is powered. Polarity is not a concern with ProSpec track because of its symmetrical positioning of circuits within the track, adapters are reversed to access one or the other circuit.
- Stem:** 5/8" O.D. .049" wall, stainless steel.
- Horizontal Locking feature:** Machined knob mechanisms permit the locking of horizontal aiming position. Adjustment range is: horizontal 0-350°. Indicator guide with 45° intervals allows precise fixture aiming.
- Vertical Locking feature:** Machined knob mechanisms permit the locking of vertical aiming position. Adjustment range is: vertical 0° (nadir) - 90°. Indicator guide with 15° intervals allows precise fixture aiming.
- Lampholder:** Porcelain, medium base, nickel plated screw shell, #18 ga. braided SF-1 leads.
- Housing:** 20 ga. (.036) steel.
- Lamp and accessory support:** .032 steel, flared for easy entry of reflector assembly, matte black finish.
- Kick reflector assembly:** Holds one accessory behind the spread lens; example: color filter, UV filter, Heat filter. Assembly is removable from front using a twist and lock motion.
- Reflector:** Embossed texture anodized aluminum; reflects light towards upper portion of wall and ceiling line.
- Lever:** Energizes fixture by 90° rotation.
- Clamping tabs:** Expands or releases gripper springs from track ledge; gripper springs hold attachment fitting securely within track.

Finish

All painted finishes are powder coated baked enamel.

Options & Accessories

Accessories: 4 3/4" dia. series. Filters, lenses, screens and louvers. 150W max when using accessories. Holds one accessory behind the spread lens. Order accessories separately

Electrical

Electrical components: Polycarbonate moldings.
Contacts: Heavy gauge 1/2 hard brass developed for Lightolier's "U" shaped track conductors.



Labels

UL; I.B.E.W.

Job Information	Type:
Job Name:	
Cat. No.:	
Lamp(s):	
Notes:	

Lightolier a Genlyte Thomas Company
631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710
We reserve the right to change details of design, materials and finish.
© 2002 Genlyte Thomas Group LLC (Lightolier Division) • A0902

LIGHTOLIER®

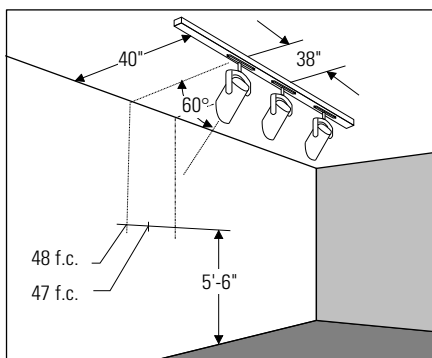**Lighting Data: 150W PAR38 FL****FOOTCANDLES ON WALL:**

EXAMPLE: With track located 40" from wall and multiple units spaced 38" on center and aimed 60° from horizontal, the illumination on wall 5' 6" from floor will be 48 f.c. beneath units and 47 f.c. between units.

Single Units**Multiple Units†****8'-0" Ceiling Height Track 22" from Wall***

Track Dist. from Wall	0°	DISTANCE TO SIDE OF UNIT									Multiple Units†					
		6"	12"	18"	24"	30"	36"	42"	48"		18"	24"	30"	36"	42"	48"
0	60°	11.0	6.5	5.5	3.0	2.0	1.5	1.0	0.5	0.5	19.5	16.5	19.5	15.0	10.5	15.0
1		70.0	65.0	34.0	12.0	5.5	8.0	1.5	1.0	1.0	97.0	109.5	97.0	80.0	48.5	80.0
2		115.0	110.0	66.0	26.0	9.0	3.5	2.0	1.0	1.0	171.0	190.5	171.0	129.0	95.0	129.0
2.5		140.0	130.0	80.0	36.0	14.0	4.5	2.5	1.5	1.0	217.0	231.0	217.0	160.0	120.0	160.0
3		120.0	115.0	77.0	39.0	16.5	6.0	2.5	1.5	1.5	203.0	217.0	203.0	144.0	120.0	144.0
4		48.0	48.0	40.0	24.0	14.0	7.5	3.0	2.0	1.5	102.0	113.0	102.5	71.0	69.0	71.0
5		17.0	17.0	16.0	11.5	8.5	5.5	3.0	2.0	1.5	46.5	51.0	46.5	33.0	32.5	33.0
6		8.0	7.0	8.0	6.0	5.0	3.5	2.8	2.0	1.5	25.5	27.0	25.5	18.5	18.5	8.5
7		4.0	4.0	5.0	3.5	3.0	3.0	2.0	2.0	1.0	15.0	18.5	15.0	12.0	12.5	12.0
8		2.5	3.0	3.0	2.5	2.5	2.5	2.0	1.5	0.5	11.5	14.0	11.5	9.0	0.0	9.0

10'-0" Ceiling Height Track 40" from Wall*

Track Dist. from Wall	0°	DISTANCE TO SIDE OF UNIT								Multiple Units†					
		12"	24"	36"	48"	60"	72"	84"		36"	48"	60"	72"	84"	
0	60°	6.0	5.0	2.5	2.5	2.0	1.0	0.5	0.0	12.0	9.5	12.0	7.5	6.0	7.5
1		13.0	11.0	9.0	3.5	2.0	1.0	0.5	0.5	21.5	24.0	21.5	17.0	13.5	17.0
2		23.0	18.0	12.0	4.5	3.0	1.0	0.5	0.5	82.5	83.0	82.5	26.0	18.0	26.0
3		25.0	28.0	14.5	5.0	8.0	1.0	0.5	0.5	86.5	40.5	36.5	28.0	21.0	28.0
4		33.0	27.0	15.0	6.0	2.5	1.0	0.5	0.5	48.0	45.0	48.0	36.0	22.5	36.0
4.5		34.0	28.0	16.0	6.0	2.5	1.0	1.0	0.5	48.0	47.0	48.0	37.0	23.5	37.0
5		28.0	25.0	15.0	6.0	2.5	1.5	1.0	0.5	41.0	43.0	41.0	31.5	22.0	81.5
6		20.0	18.0	13.0	5.5	2.0	1.5	1.0	0.5	82.0	34.0	32.0	28.5	20.0	23.5
7		15.0	18.0	9.0	4.0	1.5	1.5	1.0	1.0	25.0	25.0	25.0	18.0	14.5	18.0
8		10.0	8.5	6.0	3.0	1.5	1.5	1.0	1.0	18.0	18.0	18.0	18.0	10.5	13.0
9		8.0	7.0	4.5	2.0	1.5	1.5	1.0	1.0	14.0	14.0	14.0	11.0	8.5	11.0
10		5.0	4.0	8.5	1.5	1.5	1.5	1.0	1.0	9.0	10.5	9.0	7.5	6.5	7.5

12'-0" Ceiling Height Track 66" from Wall*

Track Dist. from Wall	0°	DISTANCE TO SIDE OF UNIT										Multiple Units†					
		12"	24"	36"	48"	60"	72"	84"	96"		84"	96"	108"	120"	132"	144"	156"
0	60°	3.5	3.0	2.5	2.0	1.0	1.0	0.5	0.5	0.5	5.0	5.0	5.0	4.0	3.0	4.2	
1		5.5	5.0	4.0	3.0	1.5	1.0	0.5	0.5	0.5	7.5	7.5	7.5	6.0	3.5	6.2	
2		8.0	7.5	5.5	3.5	2.0	1.5	1.0	0.5	0.5	10.5	10.0	10.5	8.5	5.0	8.8	
3		9.0	8.5	7.0	4.5	2.5	1.5	1.0	0.5	0.5	12.0	12.0	12.0	9.5	5.5	9.8	
4		10.0	10.0	8.0	5.5	8.0	2.0	1.0	1.0	0.5	18.5	14.5	18.5	10.5	6.5	10.6	
5		12.5	12.0	10.0	6.5	3.5	2.0	1.0	1.0	0.5	17.0	17.5	17.0	13.5	8.0	13.4	
6		15.0	14.0	11.0	7.5	4.5	2.5	1.5	1.0	1.0	20.0	20.0	20.0	16.5	9.5	16.4	
6.5		15.0	14.0	11.0	8.0	4.5	3.0	1.5	1.0	0.5	21.5	20.5	21.5	16.5	10.0	16.4	
7		14.0	12.5	10.5	7.5	4.5	8.0	1.5	1.0	0.5	20.0	19.5	20.0	15.0	9.5	15.6	
8		12.5	11.5	10.0	7.0	4.0	3.0	1.5	1.5	0.5	18.5	18.0	18.5	13.5	9.0	15.6	
9		10.0	9.0	8.0	6.0	4.0	8.0	1.5	1.5	0.5	16.0	15.0	16.0	11.0	8.5	11.2	
10		8.5	8.0	7.0	5.0	4.0	3.0	1.5	1.5	0.5	14.0	18.5	14.0	19.5	8.5	19.6	
11		7.0	6.5	6.0	4.5	8.0	8.0	1.5	1.5	0.5	12.5	11.0	12.5	7.5	7.0	7.6	
12		5.5	5.0	4.2	3.0	3.0	2.0	1.5	1.5	0.5	9.5	8.5	9.5	6.0	6.5	6.2	

*At recommended track distance from wall for corresponding ceiling height, wall washer will provide maximum illumination at eye level (5' 6" above floor) when aimed 60° from horizontal (I.E.S. recommended practice).

† Footcandles shown in table for multiple units are based on a minimum of 5 units when on 18", 27", or 38" centers and 8 units when on 57", 62", or 98" centers.

Footcandle values are based on average room conditions.

Job Information**Type:**

Lightolier a Genlyte Thomas Company

www.lightolier.com

631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710

We reserve the right to change details of design, materials and finish.

© 2002 Genlyte Thomas Group LLC (Lightolier Division) • A0902

LIGHTOLIER®