


404722LW

Decorative, Pendalyte 12" LED Pendant

Page 1 of 2

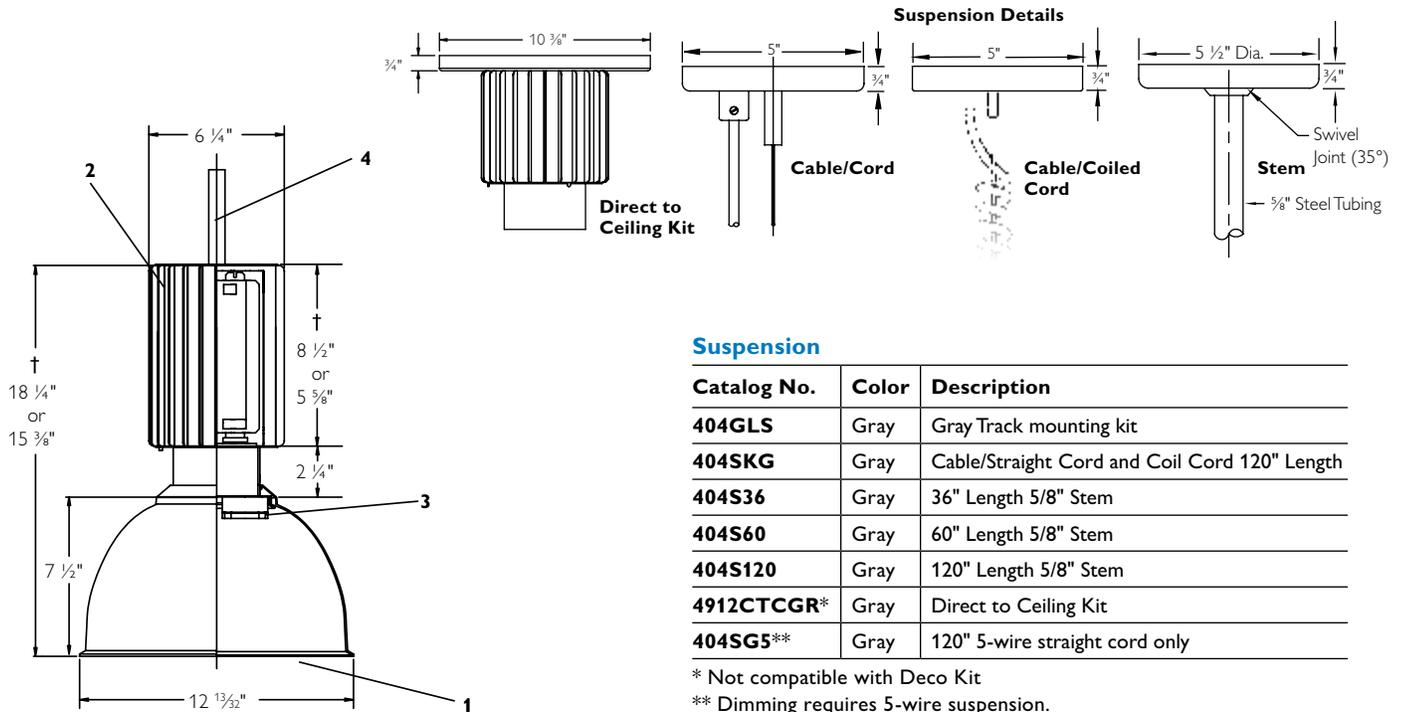

Suspension

Catalog No.	Color	Description
404GLS	Gray	Gray Track mounting kit
404SKG	Gray	Cable/Straight Cord and Coil Cord 120" Length
404S36	Gray	36" Length 5/8" Stem
404S60	Gray	60" Length 5/8" Stem
404S120	Gray	120" Length 5/8" Stem
4912CTCGR*	Gray	Direct to Ceiling Kit
404SG5**	Gray	120" 5-wire straight cord only

* Not compatible with Deco Kit

** Dimming requires 5-wire suspension.

Power Head (Finish Powder Coated Textured Dark Gray)

Catalog No.	Color	Lamp	Watts	CCT	Volts
404722LW27U	Gray	LED	30W	27K	120-277V
404722LW30U				30K	
404722LW35U				35K	
404722LW40U				40K	

Complete Unit Consists of: Power Head, Reflector or Glass Shade & Suspension (order each separately)

Reflector/Glass Shade

Cat. No.	Description
40421	Semi Specular Anodized Reflector
40422	Acrylic Refractor

Reflector/Refractor Options

Cat. No.	Description	Use With
421G	Industrex® Glass Lens	40421
422A	Flat Acrylic Lens	40422
404TRM12	12" Trim Ring	40422/40421
422G	Industrex® Glass Lens	40422

Optional Extension Kits

Catalog No.	Color	Description
404EXT300G5**	Gray	25' Extension Cable/Cord Kits
404EXT300***	Gray	25' Extension Cable/Cord Kits

** Dimming requires 5-wire suspension.


*** Use with Standard Cord or Deco Suspension Kits.

Job Information	Type:
Job Name:	
Cat. No.:	
Notes:	

404722LW

Decorative, Pendalyte 12" LED Pendant

Page 2 of 2

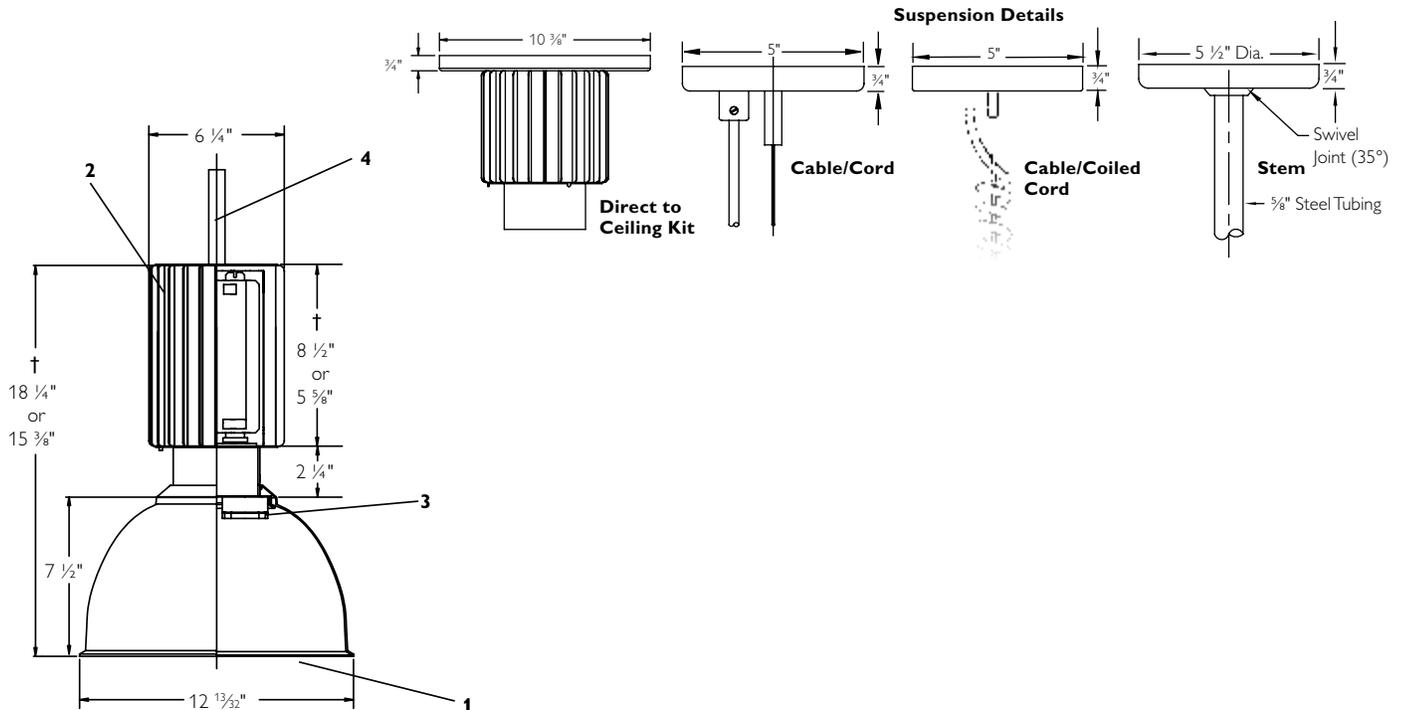

Features

- 1. Reflector/Refractor Shade:** 16 gauge high purity anodized aluminum injection molded acrylic.
- 2. Power Head Housing:** Two-piece extruded aluminum. Removable door allows for ease of installation and servicing. Dark Gray baked enamel powder coat finish.
- 3. Thermal Management:** Heat sink design maintains junction temperature for consistent, reliable performance and 50,000 hour lifetime at 70% lumen maintenance.
- 4. Suspension:** Cable/Cord: 1/16" Stainless Steel/SJT 18-3, Gray. Cable/Coiled Cord: 1/16" Stainless Steel/SJT 18-3, Gray. Stem: 5/8" Steel Tubing and Canopy, with 35° swivel hanger, Gray finish.

Electrical

LED Board: Array of high brightness white LEDs.

Power Supply:

Input Voltage	120 Vac	277 Vac
50/60 Hz Input Frequency		
Input Current		
Input Power		
Power Factor		

* +/- 5%

Dimming: Dimmable with 0-10V controls. Use 5-wire suspension.

Labels

cULus listed. Suitable for damp locations.

Note: See Specification sheet 409DK for deco kits.



Philips Lightolier
e: lol.webmaster@philips.com
t: (508) 679-8131
w: www.lightolier.com

404722LW April 27, 2015

Specifications are subject to change without notice.
© Koninklijke Philips Electronics N.V., 2010. All rights reserved.

Job Information Type: