


Decorative Luna® Diffused Light 40620

Page 1 of 2

Wall Mounted Fluorescent

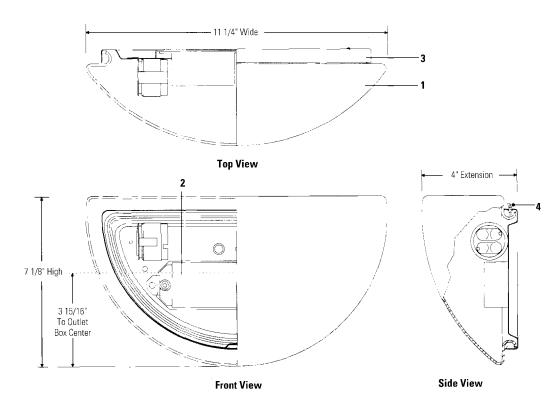

Cat. No.	Finish	Lamps	Width	Height	Extension	Ballast(s) Type	Input Voltage	Line Current	Input Watts
40620N1 40620H2	White	(1) 26W Quad Tube Compact Fluorescent (2-Pin)	11 1/4"	7 1/8"	4"	1 - 1 Lt. NPF magnetic 1 - 1 Lt. HPF magnetic	120V 277V	.50 (A) .10 (A)	28 27

Features

- 1. Diffuser: Blown white opal glass, totally enclosed. Removable by loosening thumb screw and lifting away from backplate.
- Ballast: Rated Class "P" thermally protected. See chart above for voltage and power factor options.
- 3. Backplate: Die-formed 20 ga. steel, matte white finish.
- 4. Thumb Screw: Turned brass.

Mounting

Fixture is provided with a mounting plate suitable for direct mounting to most outlet boxes or directly to wall surface over an outlet box.

Electrical

Fixtures require minimum 90°C rated supply wire.

Finish

All painted surfaces, baked enamel.

Labels

UL (suitable for damp locations), I.B.E.W.

Fixture conforms to Americans with Disabilities Act (ADA) Federal Regulations—Protruding Objects.

Job Name:

Job Information

Cat. No.:

Lamp(s):

Notes:

GHTOLIER®

Lightoliera Genlyte Thomas Companywww.lightolier.com631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710We reserve the right to change details of design, materials and finish.© 2002 Genlyte Thomas Group LLC (Lightolier Division) • A0902

Type:




CORRIDOR LIGHTING

Footcandles on Floor

Wall Mounted Fluorescent

Page 2 of 2

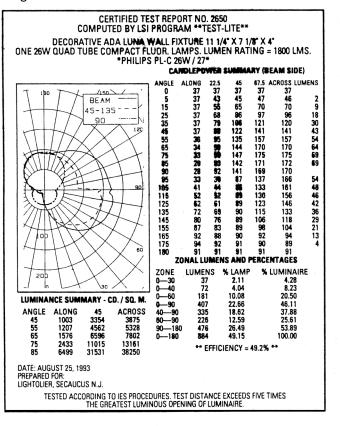

	l						1
10'	0.6	0.7	0.7	0.7	0.8	0.7	0.7
9'	0.7	0.8	0.8	0.9	0.9	0.9	0.9
8'	0.8	0.9	1.0	1.0	1.0	1.0	1.0
7'	1.0	1.1	1.2	1.2	1.2	1.2	1.1
6'	1.2	1.4	1.5	1.5	1.5	1.4	1.3
5'	1.4	1.7	1.8	1.8	1.7	1.6	1.5
4'	1.7	2.0	2.1	2.1	2.0	1.8	1.7
3'	2.0	2.3	2.4	2.4	2.2	2.0	1.8
2'	2.3	2.6	2.7	2.6	2.4	2.2	2.0
1'	2.4	2.7	2.8	2.7	2.5	2.3	2.0
0'	2.4 ^r ∽— Lum	2.7 ninaire	2.8	2.8	2.6	2.3	2.0
	1'	2'	. 3'	4'	5'	6'	7'

Footcandles values are initial.

Luminaire mounted 6'6" above floor.

Corridor is 8' wide by 8' high.

Room Reflectances: 80% Ceiling, 50% Walls, 20% Floor. For multiple luminaires add together footcandles contributed by each luminaire at point(s) desired.

Job Information

Type:

 Lightolier
 a Genlyte Thomas Company
 www.lightolier.com

 631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710
 We reserve the right to change details of design, materials and finish.

 © 2002 Genlyte Thomas Group LLC (Lightolier Division) • A0902
 A0902