

Order Information

Spec ID	Backplate	Diffuser	Lamp	Volts
40624UC	40614U	72305	(1) 26W Quad 4-Pin, Electronic	120-277V
40624C	40614	72305	(1) 40W T-10, Incandescent	120V

Must Order Backplate and Diffuser separately.

Features

- 1. Diffuser:** Translucent alabaster. Removable by unscrewing two holder knobs.
- 2. Ballast:** Rated Class "P". See chart for electrical specifications.
- 3. Backplate:** Die-formed 20 ga. steel, matte white finish.
- 4. Holder Knobs:** Available with product: set of either polished brass or satin nickel both with clear lacquer

Finish

Satin Nickel and Polished Brass

Labels

UL listed suitable for damp locations, I.B.E.W.

Lamping

Compact Fluorescent: 26W Quad Tube 4-Pin, G24q-3 base

General Electric	Osram/Sylvania	Phillips
F26 DBXT4/SPX*/4P	CF26DD/E/*	PL-C26W/*4P

* Manufacturers' color temperature designation.

Mounting

Fixture is provided with a mounting plate suitable for direct mounting to most outlet boxes or directly to wall over an outlet box.

Electrical


Lampholders: Compact Fluorescent: 4-pin, G24q-3 base

Ballasts:	Electronic120/277V
Total input Watts	29
Max. line Current (Amps)	.17 / .11
Power Factor	>.97
Ballast Factor	>.98
THD	<10%
Min. Starting Temp.	-18°C (0°F)

Fixture conforms to Americans with Disabilities Act (ADA) Federal Regulations—Protruding Objects.

Job Information	Type:
Job Name:	
Cat. No.:	
Lamp(s):	
Notes:	

631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710
 We reserve the right to change details of design, materials and finish.
 www.lightolier.com © 2008 Philips Group • B0508

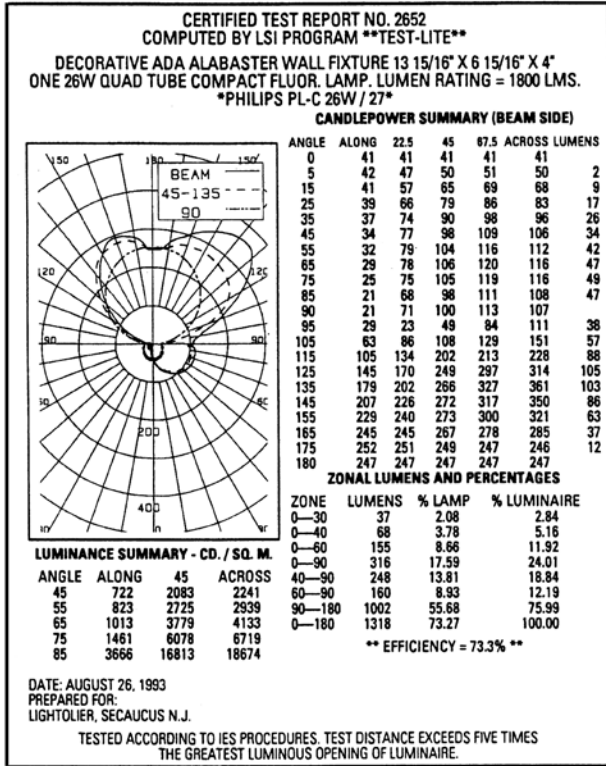

CORRIDOR LIGHTING Footcandles on Floor

Height	1'	2'	3'	4'	5'	6'	7'
10'	0.9	0.9	0.9	0.9	0.9	0.9	0.9
9'	1.0	1.1	1.1	1.1	1.1	1.0	1.0
8'	1.2	1.3	1.3	1.3	1.3	1.2	1.1
7'	1.4	1.5	1.6	1.6	1.5	1.4	1.3
6'	1.7	1.9	1.9	1.9	1.7	1.6	1.5
5'	2.1	2.3	2.3	2.2	2.0	1.9	1.7
4'	2.5	2.7	2.7	2.6	2.3	2.1	1.9
3'	3.0	3.2	3.1	2.9	2.6	2.3	2.1
2'	3.4	3.5	3.4	3.2	2.9	2.5	2.2
1'	3.6	3.8	3.7	3.4	3.0	2.6	2.3
0'	3.6	3.8	3.7	3.4	3.0	2.7	2.3

← Luminaire

Footcandles values are initial.
 Luminaire mounted 6'6" above floor.
 Corridor is 8' wide by 8' high.
 Room Reflectances: 80% Ceiling, 50% Walls, 20% Floor.
 For multiple luminaires add together footcandles contributed by each luminaire at point(s) desired.

Job Information	Type:
-----------------	-------

631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710
 We reserve the right to change details of design, materials and finish.
 www.lightolier.com © 2008 Philips Group • B0508