


40831U




Decorative, Bowshield, Wall Mounted CFL

Page 1 of 3

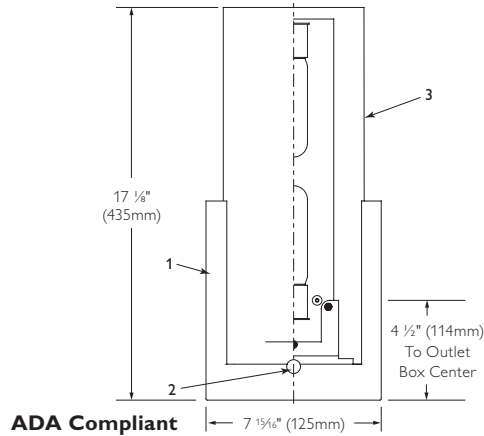

Complete Fixture consists of Lightshield and Backplate Assembly. Order each separately.

Lightshield Ordering Information

Catalog No.		
40872		Rolled "rain" pattern texture, silk-screened white/clear
40866		Three dimensional "squares" white/clear silk-screened pattern
40863		"Ceramic white" silk-screened and sandblasted

Backplate Assembly Ordering Information

Catalog No.	Finish	Lamp	Ballast Type	Input Voltage
40831H1	Satin Brass	24/27W Twin Tube	HPF Magnetic	120V
40831H2		Compact Fluorescent	HPF Magnetic	277V
40831U		4-Pin, 2G11 Base	HPF Electronic	120/277V
40832H1	Satin Nickel	24/27W Twin Tube	HPF Magnetic	120V
40832H2		Compact Fluorescent	HPF Magnetic	277V
40832U		4-Pin, 2G11 Base	HPF Electronic	120/277V

Job Information Type:

Job Name:

Cat. No.:


Notes:

PHILIPS
LIGHTOLIER

40831U

Decorative, Bowshield, Wall Mounted CFL

Page 2 of 3

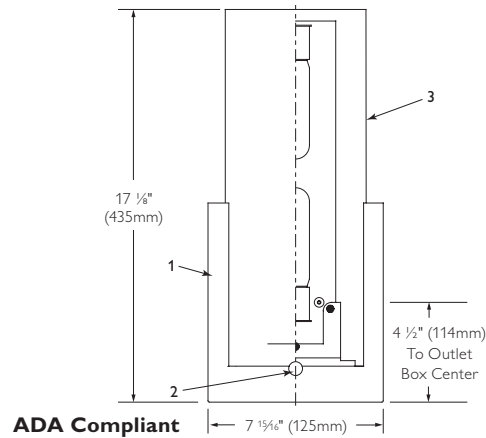

Features

- 1. Lightshield Holder:** Die-cast zinc alloy. Satin Brass or satin nickel finish with clear lacquer.
 - 2. Lightshield Support Peg:** Turned brass. Satin brass or satin nickel finish with clear lacquer.
 - 3. Backplate:** 20 ga. (.036") Die-formed steel, gloss white finish.
- Lamps:** Twin tube compact fluorescent, by others.
- Diffuser:** 6mm thick (Max.) Glass. See chart on page 1 for color options.
- Screw:** (4) Nylon. 8-32. To secure Diffuser.

Electrical

Ballasts:	Magnetic		Electronic
	Total Input Watts:	120V	277V
Ma. Line Current:	.31	-.34	-.25
Power Factor:	0.28	0.13	.21/.09
Ballast Factor:	0.90	0.95	1.0
THD:	<20%	<20%	<10%
Starting Temp:	-10°C(50°F)	-10°C(50°F)	-18°C(0°F)


Labels

cULus listed suitable for damp locations.


Job Information	Type:
------------------------	--------------

PHILIPS
LIGHTOLIER

Hallway / Footcandles

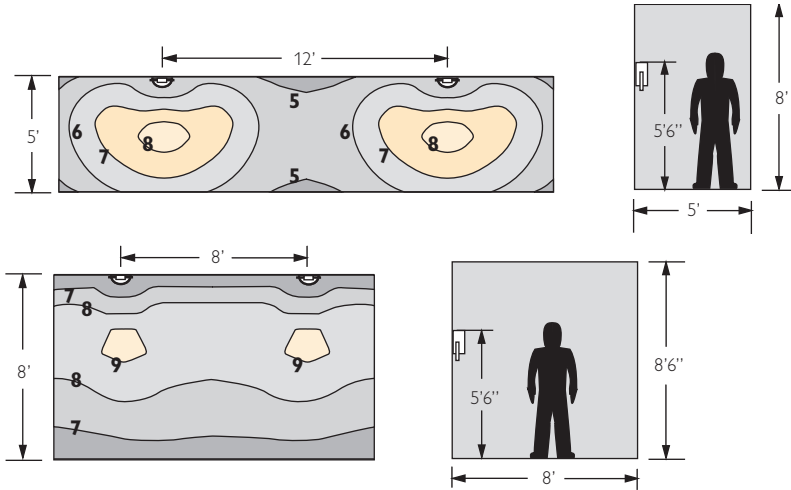

Vestibule / Conference Room / Footcandles

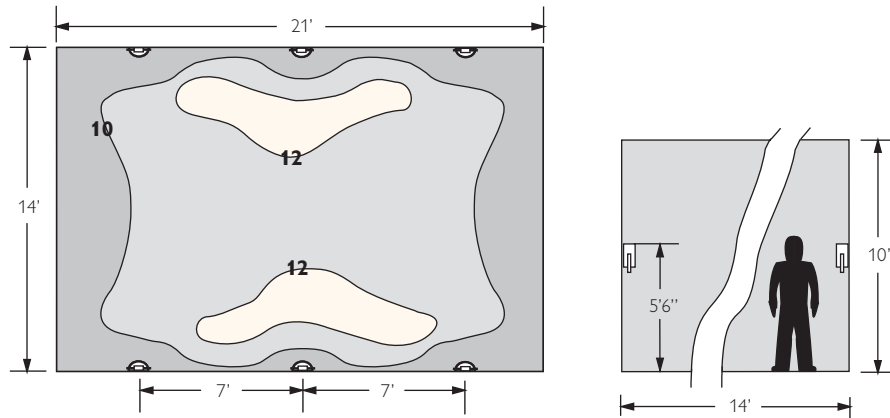

Reflectances

80% ceiling / 50% wall / 20% floor
Footcandles are on floor.

Multiplier Factors

Data shown is based on an "All White" lightshield.
For colors use 0.8 multiplier.

Lamp Specification

Lamp	Average Initial Lumens	Average Life Hrs.
24/27 TT	1800	10,000

Annual Energy Cost Savings

Compact Fluorescent	vs. Incandescent	24 hrs./day	10 hrs./day
1- 24/27W TT	2-60W T10	\$84	\$34@10¢/KWH



Philips Lightolier
e: lol.webmaster@philips.com
t: (508) 679-8131
w: www.lightolier.com

40831U May 9, 2011

Specifications are subject to change without notice.
© Koninklijke Philips Electronics N.V., 2010. All rights reserved.

Job Information Type: