


Project:	Catalog No:	Mfg:
Location:	Fixture Type:	Qty:
Notes:		Lamps:

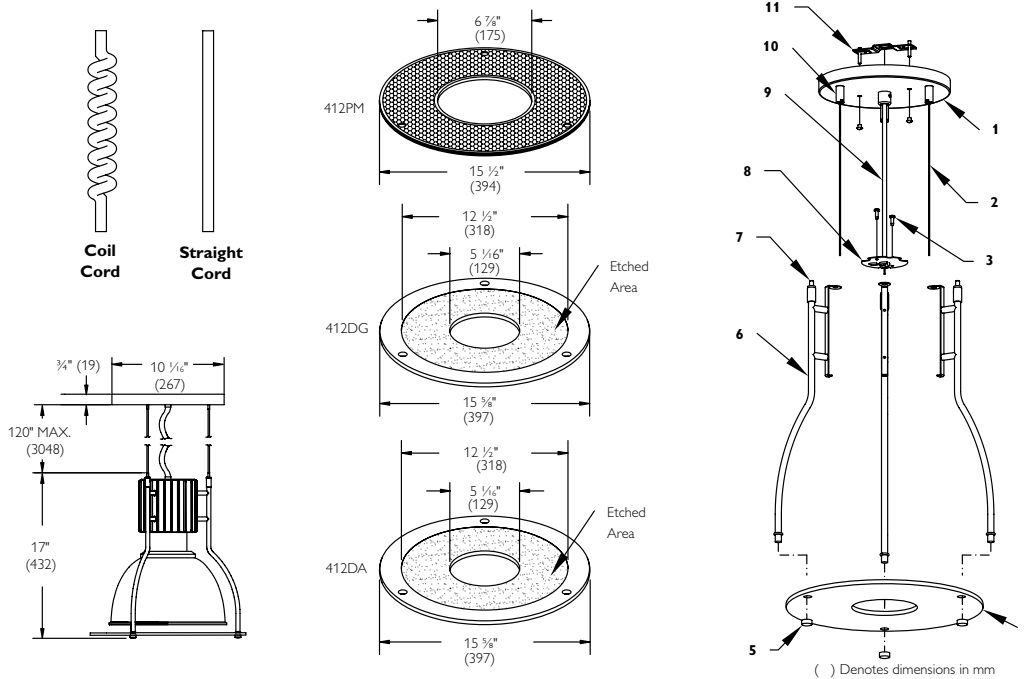

Typical complete installation shown (Power Head and Reflector must be ordered separately).

Deco Kits

Disks

Catalog No.	Color	Description	Power Cord	Cord Color	Overall Height Max.	Catalog No.	Description
412DLS	Gray	Deco Assembly & Mounting Kit	SJT 18-3	Gray	120"	412DG	Glass Disk
412DK***	Gray	Deco Assembly & Mounting Kit	SJT 18-3	Gray	120"	412DA	Acrylic Disk
412DK5***	Gray	Deco Assembly & Mounting Kit	SJT 18-3	Gray	120"	412PM	Perforated Metal Disk
412LDK***	Gray	Deco Assembly & Mounting Kit	SJT 18-3	Gray	120"		
4CCG	Gray	Coil Cord, 120" Length					
4CCB	Black	Coil Cord, 120" Length					

*Can be easily field shortened to desired length. **For use with 2 light dimming and 57W/70W dimming power heads only. ***Includes Arms & Straight Cord Suspension System.
 Note: Order Deco Kit and Disk separately. Specify Coil Cord separately.

Features

- 1. Canopy:** Die formed 16 ga. (.048) CRS (See above).
- 2. Support Cable:** (3) 1/16" diameter stainless steel.
- 3. Mounting Screws:** (2) #8-32 for mounting to power head.
- 4. Aperture Disk:** Glass: 15 5/8" diameter 1/4" thick soda lime glass, 12 1/2" diameter etched area. Acrylic: 15 5/8" dia 1/4" thick clear acrylic, 12 1/2" dia etched area. Perforated Metal: 1/16" thick satin aluminum disk with 1/16" dia holes providing 41% open area. Inner and outer edge trimmed with an EPDM rubber trim band, black finish.
- 5. Knob:** (3) Machined steel, brushed and clear lacquered.
- 6. Support Arm:** (3) 3/8" diameter steel tubing, brushed and clear lacquered.
- 7. Cable Adjuster:** (3) Steel, chrome plated allows for height and leveling adjustment after installation.
- 8. Mounting Plate:** 16 GA. (.048) CRS (See above).
- 9. Power Cord:** (See above).
- 10. Collar:** (3) Steel, chrome plated, for precise height adjustment.

- 11. Mounting Hardware:** Junction Box Cross Bar for direct mounting to standard junction boxes. (2) #8-32 Mounting Studs and (2) Cap Screws to secure canopy.

Labels

cU.L.us listed (Suitable for Damp Locations).