


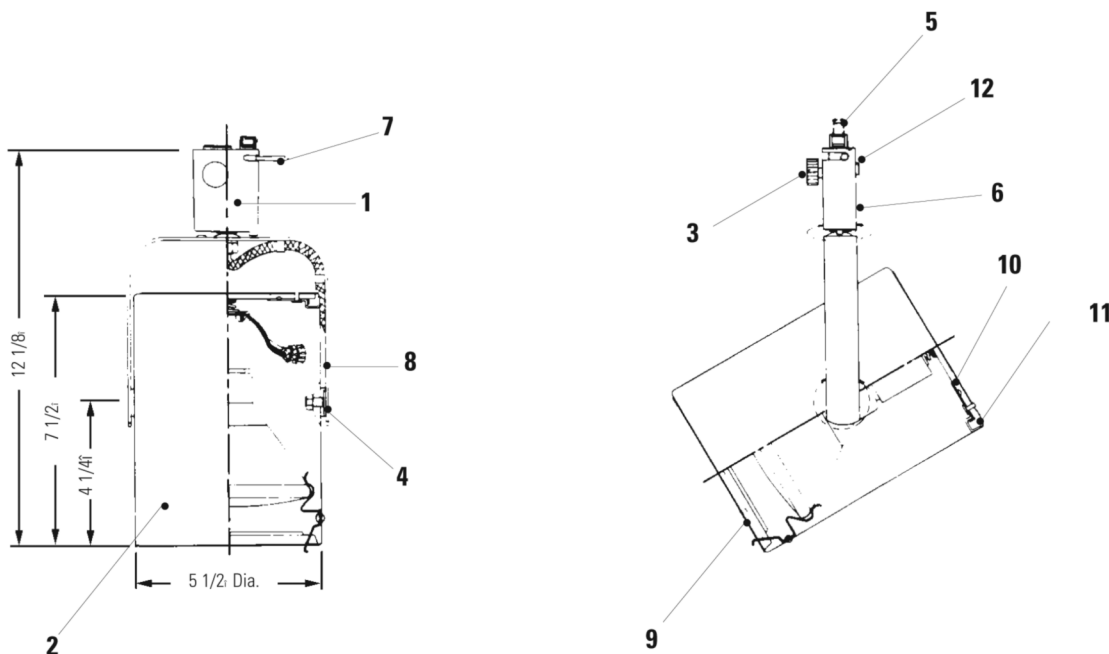

Ordering Information

Catalog No.	Finishes	Mounting	Lamps
7630	Matte Black	All Lytespan Track Systems	250W PAR38
7631	Matte White		

Features

- Lytespan Attachment Fitting:** Molded polycarbonate .075" wall thickness. Integral color.
- Housing:** .040" aluminum.
- Expansion Clamp:** Fingertip squeeze-release for quick attachment; thumb-screw lock for rigid mounting.
- Trunion Mounting:** Permently-tensioned with internal spring washer and vibration-proof nut.
- Movable Brass Contact:** Extends for connection to 2nd circuit in Advent Lytespan Track.
- Pivot Mounting:** Permanently-tensioned; 350° stop for horizontal adjustment.
- Lever:** Energizes unit.
- Yoke:** .093" steel.
- Regressed Filters, Lenses, Etc.:** Retained by spring clips.
- Latch:** Opens hinged back for relamping.
- Annular Opening for Ventilation**
- Polarity Keyway**

Electrical

Porcelain socket, medium base, nickel plated screw shell. No. 18 braided SF-1 leads.

Options & Accessories

4 3/4" Dia. Series Color Filters, Spread Lens, Louver, Barn Doors. (See Lightolier Specification Sheets AF, AF2AS, AL4CC and 7650.

Finish

All painted finishes baked enamel.

Labels

UL; I.B.E.W.

Job Information	Type:
Job Name:	
Cat. No.:	
Lamp(s):	
Notes:	

Lightolier a Genlyte Thomas Company www.lightolier.com
 631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710
 We reserve the right to change details of design, materials and finish.
 © 2002 Genlyte Thomas Group LLC (Lightolier Division) • A0902

LIGHTOLIER®




Lighting Data

Aiming Angle


L Beam Length
W Beam Width
C Distance to center beam
D Distance
A Aiming Angle
FC Footcandles

L and **W** are the outer points where the candle power drops to 50% of the maximum. **FC** are the initial footcandles at the center of the beam.


0°



30°, 45° or 60° Horizontal



30°, 45° or 60° Vertical



LAMP

	Beam Spread 50% Max. CP	Beam Center C.P. Candelas	Rated Life-Hrs
60W PAR38 SP (Halogen)	10°	17,500	2,500
60W PAR38 FL (Halogen)	30°	3,200	2,500
90W PAR38 NSP (Halogen)	9°	19,500	2,500
90W PAR38 SP (Halogen)	12°	14,500	2,500
90W PAR38 FL (Halogen)	28°	4,500	2,500
100W PAR38 SP (Halogen)	10°	29,000	3,000
100W PAR38 NFL (Halogen)	27°	4,500	3,000
100W PAR38 FL (Halogen)	40°	3,400	3,000
120W PAR38 NSP (Halogen)	10°	2,500	3,000
120W PAR38 FL (Halogen)	30°	5,000	3,000
250W PAR38 SP (Halogen)	11°	40,000	4,200
250W PAR38 FL (Halogen)	32°	8,000	4,200

0° AIMING ANGLE

D	FC	L	W
8'	273	1.4'	1.4'
12'	122	2.1'	2.1'
16'	68	2.8'	2.8'
20'	44	3.5'	3.5'
6'	89	3.2'	3.2'
8'	50	4.3'	4.3'
10'	32	5.4'	5.4'
12'	22	6.4'	6.4'
10'	195	1.6'	1.6'
15'	87	2.4'	2.4'
20'	49	3.1'	3.1'
25'	31	3.9'	3.9'
8'	277	1.7'	1.7'
12'	101	2.5'	2.5'
16'	57	3.4'	3.4'
20'	36	4.2'	4.2'
6'	125	3.0'	3.0'
8'	70	4.0'	4.0'
10'	45	5.0'	5.0'
12'	31	6.0'	6.0'
10'	290	1.7'	1.7'
15'	129	2.6'	2.6'
20'	73	3.5'	3.5'
25'	45	4.4'	4.4'
7'	153	3.4'	3.4'
10'	75	4.8'	4.8'
13'	44	6.2'	6.2'
16'	29	7.7'	7.7'
6'	94	4.4'	4.4'
8'	53	5.8'	5.8'
10'	34	7.3'	7.3'
12'	24	8.7'	8.7'
10'	250	1.7'	1.7'
15'	111	2.6'	2.6'
20'	63	3.5'	3.5'
25'	40	4.4'	4.4'
6'	130	3.2'	3.2'
8'	78	4.3'	4.3'
10'	50	5.4'	5.4'
12'	35	6.4'	6.4'
15'	178	2.9'	2.9'
20'	100	3.9'	3.9'
25'	64	4.8'	4.8'
30'	44	5.8'	5.8'
7'	163	4.0'	4.0'
10'	80	5.7'	5.7'
13'	47	7.5'	7.5'
16'	31	9.2'	9.2'

A=30° AIMING ANGLE

D	C	FC	L	W
7'	4.0'	232	1.6'	1.4'
10'	5.8'	114	2.3'	2.0'
13'	7.5'	67	3.0'	2.6'
16'	9.2'	44	3.7'	3.2'
5'	2.9'	83	3.7'	3.1'
7'	4.0'	42	5.1'	4.3'
9'	5.2'	26	6.6'	5.6'
11'	6.4'	17	8.1'	6.8'
8'	4.6'	198	1.7'	1.5'
12'	6.9'	88	2.5'	2.2'
16'	9.2'	49	3.4'	2.9'
20'	11.5'	32	4.2'	3.6'
7'	4.0'	192	2.0'	1.7'
10'	5.8'	94	2.8'	2.4'
13'	7.5'	56	3.7'	3.2'
16'	9.2'	37	4.5'	3.9'
5'	2.9'	117	3.4'	2.9'
7'	4.0'	60	4.8'	4.0'
9'	5.2'	38	6.1'	5.2'
11'	6.4'	24	7.5'	6.3'
8'	4.6'	294	1.9'	1.8'
12'	6.9'	131	2.8'	2.4'
16'	9.2'	74	3.7'	3.2'
20'	11.5'	47	4.7'	4.0'
6'	3.5'	135	3.9'	3.3'
9'	5.2'	60	5.9'	5.0'
12'	6.9'	34	7.8'	6.7'
15'	8.7'	22	9.8'	8.3'
5'	2.9'	88	5.1'	4.2'
7'	4.0'	45	7.1'	5.9'
9'	5.2'	27	9.1'	7.6'
11'	6.4'	18	11.2'	9.2'
8'	4.6'	254	1.9'	1.6'
12'	6.9'	113	2.8'	2.4'
16'	9.2'	63	3.7'	3.2'
20'	11.5'	41	4.7'	4.0'
5'	2.9'	130	3.7'	3.1'
7'	4.0'	68	5.1'	4.3'
9'	5.2'	40	6.6'	5.6'
11'	6.4'	27	8.1'	6.8'
10'	5.8'	260	2.6'	2.2'
15'	8.7'	115	3.9'	3.3'
20'	11.5'	65	5.2'	4.4'
25'	14.4'	42	6.4'	5.8'
6'	3.5'	144	4.7'	4.0'
9'	5.2'	64	7.1'	6.0'
12'	6.9'	36	9.4'	7.9'
15'	8.7'	23	11.8'	9.9'

A=45° AIMING ANGLE

D	C	FC	L	W
5'	5.0'	247	1.8'	1.2'
7'	7.0'	126	2.5'	1.7'
9'	9.0'	76	3.2'	2.2'
11'	11.0'	51	3.9'	2.7'
3'	3.0'	126	3.5'	2.3'
5'	5.0'	45	6.8'	3.8'
7'	7.0'	23	8.1'	5.3'
9'	9.0'	14	10.4'	8.8'
6'	6.0'	192	1.9'	0.7'
9'	9.0'	85	1.8'	2.9'
12'	12.0'	45	2.5'	3.8'
15'	15.0'	31	3.2'	4.8'
5'	5.0'	205	2.1'	1.5'
7'	7.0'	105	3.0'	2.1'
9'	9.0'	63	3.8'	2.7'
11'	11.0'	42	4.7'	3.3'
3'	3.0'	177	3.2'	2.1'
5'	5.0'	64	5.3'	3.5'
7'	7.0'	32	7.4'	4.9'
9'	9.0'	20	9.6'	6.3'
6'	6.0'	285	2.1'	1.5'
9'	9.0'	127	3.2'	2.2'
12'	12.0'	71	4.2'	3.0'
15'	15.0'	48	5.3'	3.7'
4'	4.0'	168	4.1'	2.7'
6'	6.0'	74	6.1'	4.1'
8'	8.0'	41	8.2'	5.4'
10'	10.0'	27	10.2'	6.8'
3'	3.0'	134	5.0'	3.1'
5'	5.0'	48	8.4'	5.1'
7'	7.0'	25	11.7'	7.2'
9'	9.0'	15	15.1'	9.3'
6'	6.0'	245	2.1'	1.5'
9'	9.0'	109	3.2'	2.2'
12'	12.0'	61	4.2'	3.0'
15'	15.0'	30	5.3'	3.7'
3'	3.0'	196	3.5'	2.3'
5'	5.0'	71	5.8'	3.8'
7'	7.0'	36	8.1'	5.3'
9'	9.0'	22	10.4'	6.8'
8'	8.0'	221	3.1'	2.2'
12'	12.0'	98	4.7'	3.3'
16'	16.0'	55	6.2'	4.4'
20'	20.0'	35	7.8'	5.4'
4'	4.0'	177	5.0'	3.2'
6'	6.0'	79	7.5'	4.9'
8'	8.0'	44	10.0'	6.5'
10'	10.0'	28	12.5'	8.1'

A=60° AIMING ANGLE

D	C	FC	L	W
3'	5.2'	243	2.1'	1.0'
4'	6.9'	137	2.9'	1.4'
5'	8.7'	88	3.6'	1.7'
6'	10.4'	61	4.3'	2.1'
2'	3.5'	100	5.5'	2.1'
3'	5.2'	44	8.2'	3.2'
4'	6.9'	25	10.9'	4.3'
5'	8.7'	16	13.7'	5.4'
4'	6.9'	152	2.6'	1.3'
6'	10.4'	68	3.8'	1.8'
8'	13.9'	38	5.1'	2.5'
10'	17.3'	24	6.4'	3.1'
3'	5.2'	201	2.6'	1.3'
4'	6.9'	113	3.5'	1.7'
5'	8.7'	73	4.3'	2.1'
8'	10.4'	50	5.2'	2.5'
2'	3.5'	141	4.9'	2.0'
3'	5.2'	63	7.4'	3.0'
4'	6.9'	35	9.8'	4.0'
5'	8.7'	23	12.3'	5.0'
4'	6.9	227	2.9'	1.4'
6'	10.4'	101	4.3'	2.1'
8'	13.9'	57	5.7'	2.8'
10'	17.3'	36	7.2'	3.5'
2'	3.5'	234	4.6'	1.9'
3'	5.2'	104	7.0'	2.9'
4'	6.9'	59	8.3'	3.8'
5'	8.7'	38	11.6'	4.8'
2'	3.5'	108	9.7'	2.9'
3'	5.2'	47	14.5'	4.4'
4'	6.9'	27	19.3'	5.8'
5'	8.7'	17	24.2'	7.3'
4'	6.9'	195	2.9'	1.4'
6'	10.4'	87	4.3'	2.1'
8'	13.9'	49	5.7'	2.8'
10'	17.3'	31	7.2'	3.5'
2'	3.5'	156	5.5'	2.1'
3'	5.2'	69	8.2'	3.2'
4'	6.9'	39	10.9'	4.3'
5'	8.7'	25	13.7'	5.4'
5'	8.7'	200	4.0'	1.9'
8'	13.9'	78	6.3'	3.1'
11'	19.1'	41	8.7'	4.2'
14'	24.2'	26	11.1'	5.4'
2'	3.5'	250	6.1'	2.3'
3'	5.2'	111	9.1'	3.4'
4'	6.9'	63	12.2'	4.6'
5'	8.7'	40	15.2'	5.7'

Job Information

Type:

Lightolier a Genlyte Thomas Company www.lightolier.com
631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710
We reserve the right to change details of design, materials and finish.
© 2002 Genlyte Thomas Group LLC (Lightolier Division) • A0902