

Ceiling Cutout: 8" (203 mm) Dia.

Reflector Trim	Frame-In Kit
<b>8047 CLW</b> Clear Iridescence Free, White Flange <b>8047 CLP</b> Clear Iridescence Free, Polished Flange <b>8047</b> <input type="checkbox"/> Add Suffix. See options for other finishes.	<b>S7126BU</b> 7" aperture, 1 lamp 26W Triple Tube CFL (120/277V) 4-Pin (Amalgam) <b>S7132BU</b> 7" aperture, 1 lamp 26/32W Triple Tube CFL (120/277V) 4-Pin (Amalgam) <b>S7142BU</b> 7" aperture, 1 lamp 26/32/42W Triple Tube CFL (120/277V) 4-Pin (Amalgam) <b>Dimming Options:</b> <b>S7132B</b> <input type="checkbox"/> or <b>S7142B</b> <input type="checkbox"/> <b>CU3</b> Lightolier PowerSpec 3% Dimming (120/277V) <b>J1LD3</b> Lutron 5% Dimming (120V) <b>J2LD3</b> Lutron 5% Dimming (277V) <b>JUM7</b> Mark 7 Dimming (120/277V) <b>J1MX</b> Mark 10 Dimming (120V) <b>J2MX</b> Mark 10 Dimming (277V) Other dimming product available, please consult factory
	Remodeler Frame-In Kits
	<b>7126BURM</b> 7" aperture, 1 lamp 26W Triple Tube CFL (120/277V) 4-Pin (Amalgam) <b>7132BURM</b> 7" aperture, 1 lamp 26/32W Triple Tube CFL (120/277V) 4-Pin (Amalgam) <b>7142BURM</b> 7" aperture, 1 lamp 26/32/42W Triple Tube CFL (120/277V) 4-Pin (Amalgam)

### Features

- Optics:** Directional prismatic glass spread lens and Alzak® "kick" reflector direct light smoothly across and down wall. Rotates for correct orientation. Aperture cone with Iridescence Free finish.
- Socket Cup:** Snaps onto reflector neck to assure consistently correct optical alignment without tools.
- Retaining Springs:** Precision-tooled steel friction springs secure reflector to mounting frame for quick, tool-less installation.
- Mounting Brackets:** 16 ga. steel. Adjust from inside of fixture. Use 3/4" or 1 1/2" lathing channel, 1/2" EMT, or optional mounting bars.
- Ballast/J-Box:** Outboard mounted to reduce heat transfer and maintain lamp efficacy and life. Service from below without tools.
- Torsionite Springs:** Wire formed steel holds reflector/spread lens assembly snug to housing.

### Electrical

**Note:** For ballast electrical data and latest lamp/ballast compatibility refer to "Ballast" specification sheet for complete electrical data.  
 UL listed for through branch circuit wiring with max of (8) No. 12 AWG, 90° C supply conductors.

### Options and Accessories

Comfort Clear™ Finishes <sup>1</sup>		Other Finishes	
Clear	<b>CCL</b>	White	<b>WH</b>
Diffuse	<b>CCD</b>	Specular Clear	<b>CL</b>
Champagne Bronze	<b>CCZ</b>		

<sup>1</sup>Specify desired flange  
**W** White, **P** Polished  
 Blank - Molded Ring

### Options and Accessories (continued)

Emergency	Add suffix <b>EM*</b>
Chicago Plenum	Add suffix <b>LC</b>
Existing/Thk. Ceiling	<b>FA EC7*</b>
Emergency Ltg. Kit	<b>FA EM3E*</b>
Fuse (slow blow)	Add suffix <b>F</b>

\*See Spec. Sheets: FAEC, FAEM

Mounting Bars & Accessories; see Specification Sheet MBA.  
 Sloped Ceiling Adapters; see Specification Sheet SCA.

### Labels


UL listed for damp locations, I.B.E.W.

Alzak® is a registered trademark of ALCOA.

Job Information	Type:
<b>Job Name:</b>	
<b>Cat. No.:</b>	
<b>Lamp(s):</b>	
<b>Notes:</b>	


631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710  
 We reserve the right to change details of design, materials and finish.  
 www.lightolier.com © 2011 Philips Group • C0711

**Footcandles On Wall: Multiple 32W Units**

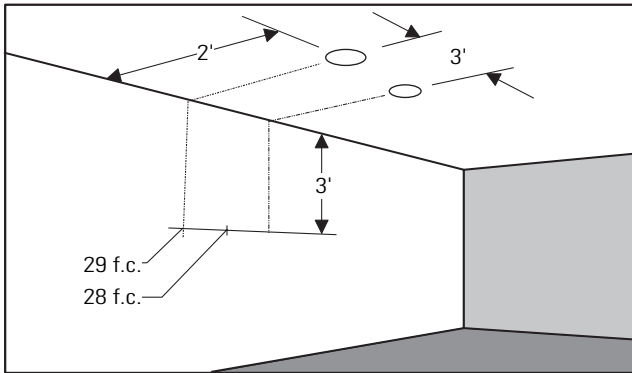

EXAMPLE: With multiple clear reflector units located 2' from wall and spaced 3' on center, the illumination on the wall 3' down from ceiling will be 39 f.c. beneath units and 40 f.c. between units.

**Footcandles On Wall: Multiple 42W Units**

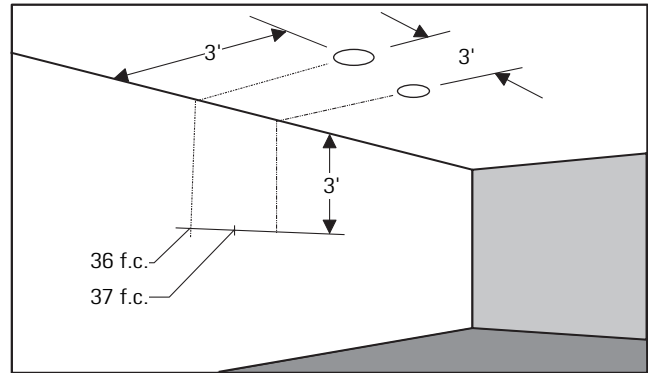

EXAMPLE: With multiple clear reflector units located 3' from wall and spaced 3' on center, the illumination on the wall 3' down from ceiling will be 36 f.c. beneath units and 37 f.c. between units.

**2' from Wall-2' On Center**

Distance From Ceiling in Feet	1	38	32	38
	2	50	49	50
	3	43	43	43
	4	33	32	33
	5	25	32	25
	6	20	20	20
	7	16	15	16
	8	13	13	13
	9	11	11	11

**2' from Wall-3' On Center**

Distance From Ceiling in Feet	1	31	16	31
	2	38	28	38
	3	29	29	29
	4	22	22	22
	5	17	17	17
	6	13	13	13
	7	11	11	11
	8	9	9	9
	9	7	7	7

**2' from Wall-2' On Center**

Distance From Ceiling in Feet	1	61	52	61
	2	80	81	80
	3	61	62	61
	4	44	45	44
	5	32	33	32
	6	24	25	24
	7	19	19	19
	8	15	15	15
	9	13	13	13

**2' from Wall-3' On Center**

Distance From Ceiling in Feet	1	52	25	52
	2	57	51	57
	3	40	42	40
	4	30	31	30
	5	23	23	23
	6	18	18	18
	7	14	14	14
	8	12	12	12
	9	10	10	10

**3' from Wall-3' On Center**

Distance From Ceiling in Feet	1	10	9	10
	2	21	20	21
	3	23	23	23
	4	22	22	22
	5	19	19	19
	6	16	16	16
	7	13	13	13
	8	11	11	11
	9	10	10	10

**3' from Wall-4' On Center**

Distance From Ceiling in Feet	1	8	6	8
	2	17	13	17
	3	18	16	18
	4	16	16	16
	5	14	14	14
	6	12	11	12
	7	10	9	10
	8	8	8	8
	9	7	7	7

**3' from Wall-3' On Center**

Distance From Ceiling in Feet	1	16	12	16
	2	34	32	34
	3	36	37	36
	4	31	31	31
	5	25	26	25
	6	21	21	21
	7	17	17	17
	8	15	15	15
	9	13	13	13

**3' from Wall-4' On Center**

Distance From Ceiling in Feet	1	14	8	14
	2	29	21	29
	3	28	27	28
	4	23	24	23
	5	19	20	19
	6	16	16	16
	7	13	14	13
	8	12	12	12
	9	10	10	10

Footcandle values are averaged and rounded off and based on minimum of five units.

**Job Information** **Type:**

631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710  
 We reserve the right to change details of design, materials and finish.  
 www.lightolier.com © 2011 Philips Group • C0711