


86130

Decorative Lytepoints, 10' Cable or Cord Pendant

Page 1 of 2

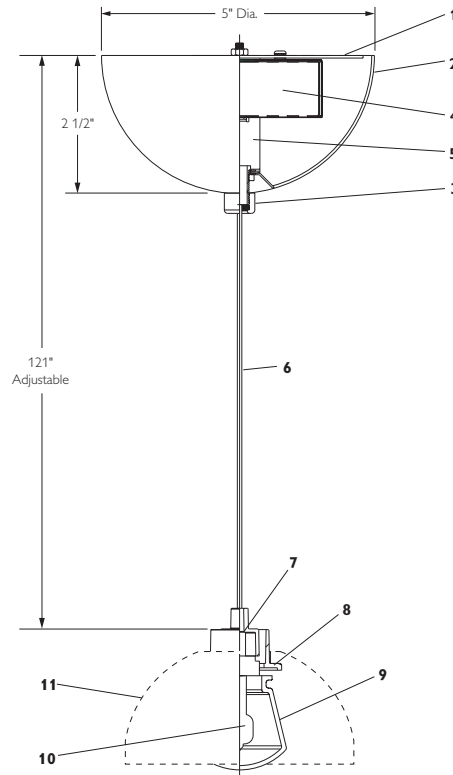

Ordering Information

Catalog No.	Description	Size	Lamping (by others)
86130AL	Satin aluminum	10' Coaxial cable	35W 12V: T-4
86130WH	Matte white	10' Coaxial cable	Tungsten Halogen
86132BK	Matte black	10' Flexible cord	Bi-Pin (G6.35) Base
86132WH	Matte white	10' Flexible cord	
86133AL	Satin aluminum		
86133WH	Matte white		
86133BK	Matte black		

Job Information Type:

Job Name:


Cat. No.:

Notes:

PHILIPS
LIGHTOLIER

Decorative Lytepoints, 10' Cable or Cord Pendant

Page 2 of 2

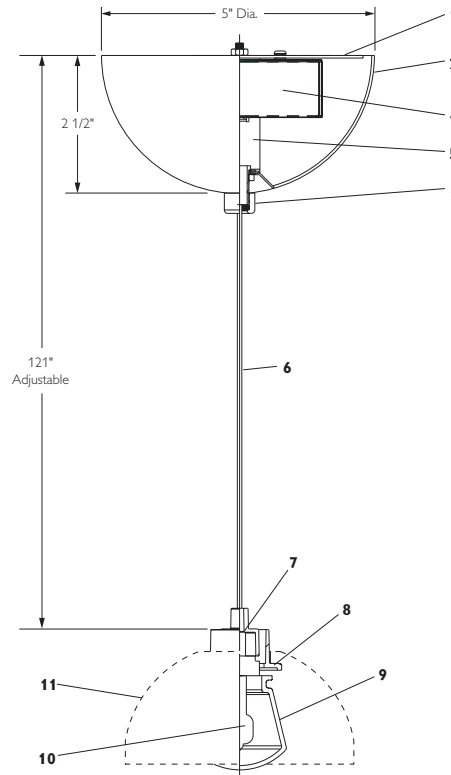**Features**

- 1. Mounting Plate:** 18 ga. galvanized steel.
- 2. Canopy:** 18 ga. steel. See above chart for finish.
- 3. Knob:** Required to secure canopy to mounting plate.
- 4. Transformer:** Electronic 35W, low voltage (12V).
Input 120V, 50/60hz; input current 0.625A.
- 5. Transformer Bracket:** 18 ga. steel. Gloss white.
- 6. Electrical Cord:** 2-Conductor braided coaxial cable or flexible cord.
- 7. Holder Casting:** Die cast aluminum alloy.
- 8. Shade Support:** Die cast aluminum alloy.
- 9. Lamp Guard:** Satin finished glass provided for effective light diffusion.
- 10. Lamp:** 35W 12V T-4 Tungsten Halogen
Bi-Pin (G6.35) base, (by others).
- 11. Shade / Diffuser:** See Specification Sheet 42232 for details.

Electrical

Bi-Pin ceramic socket having a 6.35mm pin spacing. Pre-wired with braided coaxial cable.

Labels

UL Listed, Suitable for Dry Locations Only.



Philips Lightolier
e: lol.webmaster@philips.com
t: (508) 679-8131
w: www.lightolier.com

86130 May 10, 2011

Specifications are subject to change without notice.
© Koninklijke Philips Electronics N.V., 2011. All rights reserved.

Job Information	Type:
-----------------	-------