


Universal Celebrity Wall CWBU Series

Page 1 of 2





Wall Mounted Fluorescent, 7-5/8" Width, 24", 48" Lengths
Uplight/Downlight or Downlight Only, 1 or 2 Lamp T8

Features



- Universal luminaire that has uplight/downlight or downlight only capabilities on the same fixture
- Low brightness controlled uplighting/downlighting
- Injection-molded one-piece virgin acrylic downlight refractor (1 side, 2 ends and face)
- Catadioptric side and end wall design (downlight)
- Slim 3-1/16" depth
- Nominal 2' and 4' lengths
- 67.1% efficient (T8 lamps, uplight/downlight)
- 63.0% efficient (T8 lamps, downlight only)
- Invisible steel latches align refractor to housing
- Individual or continuous rows
- For over mirror, over bed, corridor, stairwell and bulletin board applications

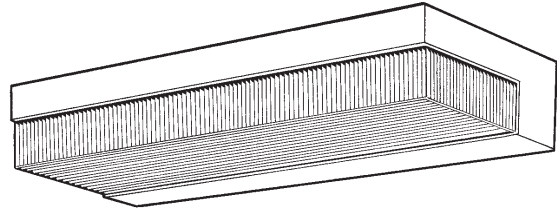


Dimensions

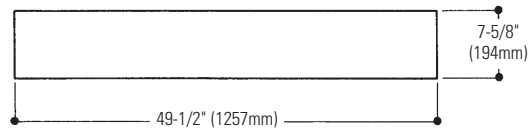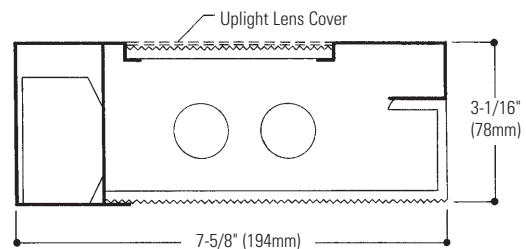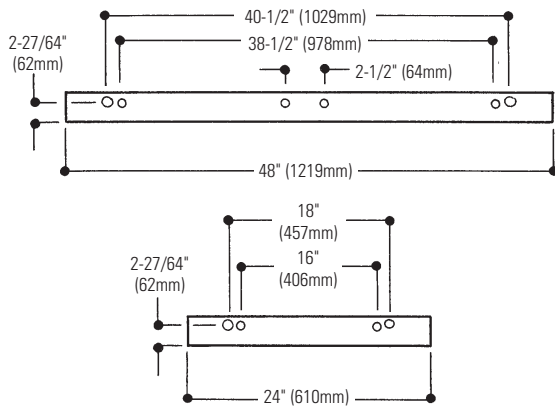

Features



Uplight lens cover for
downlight only



Uplight lens cover removed
for uplight/downlight

Job Information

Type:

Job Name:

Cat. No.:

Lamp(s):

Volts/Ballast:

Lightolier a Genlyte Thomas Company

www.lightolier.com

Technical Information: (978) 657-7600 • Fax (978) 658-0595

631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710

We reserve the right to change details of design, materials and finish.

Copyright 2004 Lightolier

Section 4A/Folio I20-14




Universal Celebrity Wall CWBU Series

Page 2 of 2

Wall Mounted Fluorescent, 7-5/8" Width, 24", 48" Lengths
Uplight/Downlight or Downlight Only, 1 or 2 Lamp T8


Photometry

Model No. CWBU232UNVSO (Uplight/Downlight)

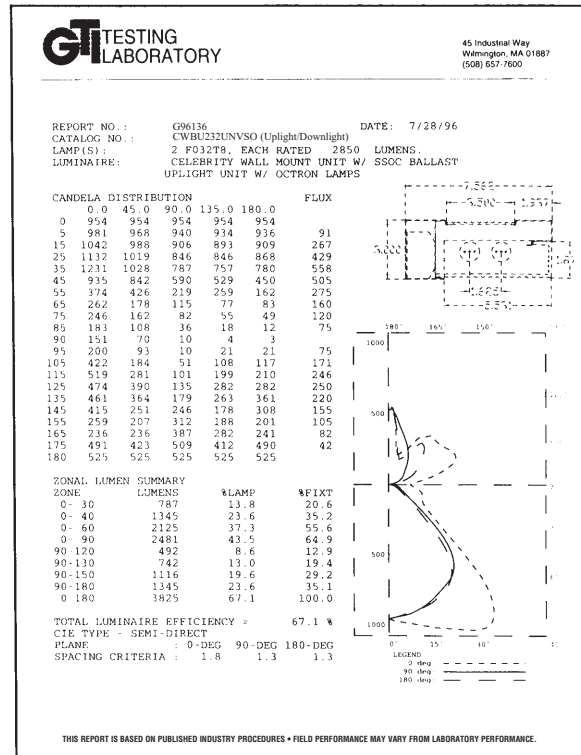

Photometry

Model No. CWBU232UNVSO (Downlight)

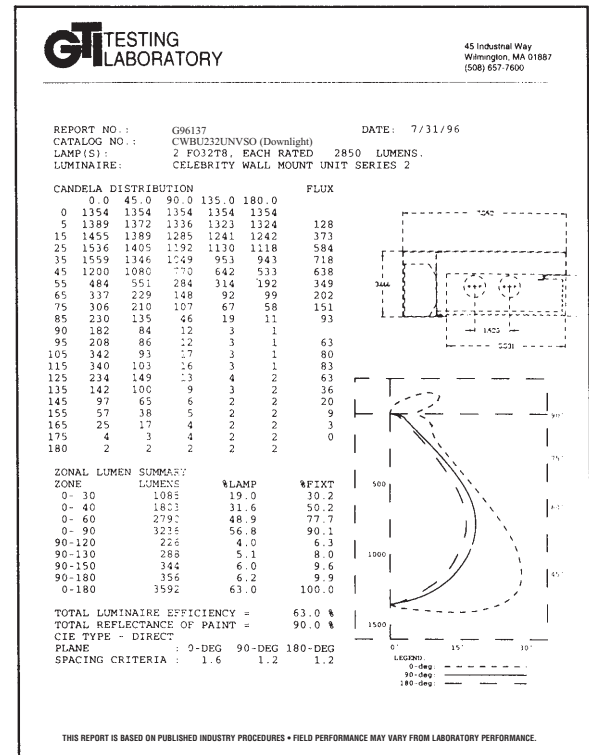

Ordering Information

Explanation of Catalog Number. Example: CWBU232UNVSOEM

CWBU					
Celebrity Wall					
Universal					
Wall Mounted					
White Body					
Fluorescent					
Uplight/Downlight					
or					
Downlight Only					
Lamp Quantity:					
1 = 1 Lamp					
2 = 2 Lamp					
Lamp Fixture Length:					
17=T8, 2' Length					
32=T8, 4' Length					
Voltage:					
120 or 277					
UNV:					
Universal					
Voltage					
120-277 volt					
Ballast Type:					
<20THD					
SO*					
PS					
1 & 2 Lamp Elec. (T8)					
LOL T8 Dimming					
*Instant Start Standard					
Other dimming options. Consult factory.					
Options:					
Add appropriate					
suffix to catalog					
no, ie: (EM)					

Options/Accessories

Fusing: Internal fast-blow fusing. Suffix: **GLR**.

Internal slow-blow fusing. Suffix: **GMF**.

Radio Interference Filter: 120 or 277 volt, 50 or 60 Hz. One per fixture:

Suffix: **R**. One per ballast: Suffix: **B**.

Emergency Power Pack: Factory installed emergency power pack includes charger and inverter concealed in fixture channel. Upon loss of AC power, operates one lamp at reduce light. Suffix: **EM**.

Electrical Wiring Options: Consult factory.

Note: Consult factory for availability of options for nominal 2' long fixtures.

Specifications

Materials: Chassis parts are die-formed code gauge cold rolled steel.

Refractor—one-piece virgin acrylic.

Finish: Chassis exterior—white baked acrylic enamel. **Cavity**—white baked acrylic enamel minimum 86% reflectance. Phosphate undercoating.

Refractor (downlight): One-piece injection-molded, (full re-entrant virgin acrylic with Catadioptric side, ends and