


E8 Series

COMMERCIAL EMERGENCY LIGHTING

Page 1 of 2

E8W

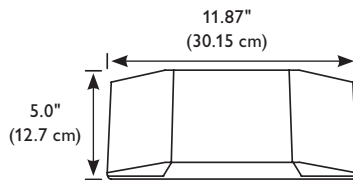

Features

Illumination: Illumination is provided by two 6 VDC, 5.4 W T-5 lamps and flush mounted fresnel lenses that maximize light output and provide glare free light distribution.

Housing: Constructed of impact resistant, UL 94 V-0, 5 VA thermoplastic, completely self contained. White housing is standard. Snap-together backplate and housing incorporates a self-connecting power plug making installation quick and easy.

Operating Temperature

Range:

65°F (19°C) to 85°F (30°C)

Electronics: 120/277 VAC

dual voltage input with surge-protected, solid-state charging circuitry provides for a reliable charging system. Charging system is complete with low voltage disconnect, AC lockout, brownout protection, AC indicator lamp and test switch.

Electrical Specifications:

0.060 A (120 VAC)

0.031 A (277 VAC)

Code Compliance

UL 924 listed. NFPA 101, NEC, BOCA, OSHA and IBC illumination standards.

Warranty

Three year full electronics warranty. One year full plus four year prorated battery warranty.

Job Information	Type:
Job Name:	
Cat. No.:	
Notes:	

PHILIPS

LIGHTOLIER

E8 Series

COMMERCIAL EMERGENCY LIGHTING

Page 2 of 2

Ordering Information

E8

Series

E8 = E8 Series
6 V, 11 W
Lighting Fixture

W

Housing Color

W = White

Accessories (order as a separate item)

WG5 = Wire Guard



Philips Lightolier
e: lol.webmaster@philips.com
t: (508) 679-8131
w: www.lightolier.com

E8 Series August 9, 2011

Specifications are subject to change without notice.
© Koninklijke Philips Electronics N.V., 2011. All rights reserved.

Job Information

Type: