


ENR/ER Series

6 OR 12 V, 6 TO 20 W REMOTE LAMP HEAD

Page 1 of 2

ENR2M7FB

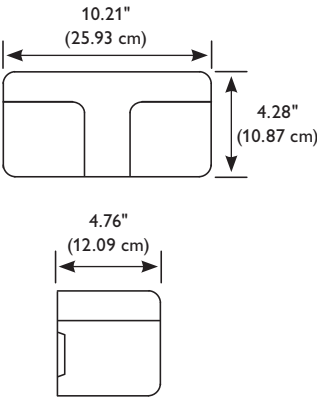

Features

Illumination: Illumination is provided by MR16 LED, MR16 halogen or bi-pin halogen lamps and a high performance, specular parabolic reflector design which can be adjusted 180° vertically and horizontally. A wide variety of lamps are available to meet specific egress requirements.

Housing: The product backplate is constructed of impact-resistant, UL 94 V-0, 5 VA thermoplastic. The cover is UV-stabilized, impact-resistant thermoplastic. Thermoplastic backplate is designed to mount securely to a single gang recessed wall or ceiling junction box. Suitable for use in damp locations only.

Installation: Furnished low voltage supply wires (12") are connected at the junction box to either a 6 VDC or 12 VDC emergency power source, supplied separately. The backplate is secured via a universal knockout pattern to a recessed junction box (hardware supplied by others). Keyhole knockout slots are provided for additional support or mounting options.

Code Compliance

Meets ADA specifications for wall mounted lighting fixtures. NFPA 101, NEC, BOCA, OSHA and IBC illumination standards.

Ordering Information



Series

ENR1 = 6 V Thermoplastic Remote Head
ENR2 = 12 V Thermoplastic Remote Head



Lamp Heads

6 Volt
H6 = 6 W Halogen Bi-Pin
H7 = 7 W Halogen Bi-Pin
H10 = 10 W Halogen Bi-Pin
H12 = 12 W Halogen Bi-Pin



Housing Color

W = White
B = Black

12 Volt
T12 = 12 W Halogen Bi-Pin
H12 = 12 W Halogen MR16 Flood
H20F = 20 W Halogen MR16 Flood
H20S = 20 W Halogen MR16 Spot

12 Volt LED¹
M7F² = 7 W MR16 LED, 35°

Note

- 1) Lamp included per UL acceptance.
2) UL testing restricts using any substitutes for this lamp option.

Job Information Type:

Job Name:

Cat. No.:

Notes:


PHILIPS
LIGHTOLIER

ENR/ER Series

6 OR 12 V, 6 TO 20 W REMOTE LAMP HEAD

Page 2 of 2

ER1T6W

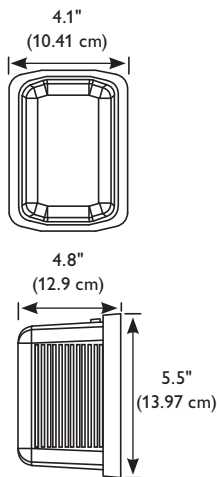

Features

Illumination: Illumination is provided by a high-performance, specular parabolic reflector design which can be adjusted 180° vertically and horizontally. A wide variety of lamps are available to meet specific egress requirements.

Housing: The product backplate is constructed of impact-resistant, UL 94 V-0, 5 VA thermoplastic. Thermoplastic backplate is designed to mount securely to a single gang recessed wall or ceiling junction box.

Installation: Furnished low voltage supply wires (12") are connected at the junction box to either a 6 VDC or 12 VDC emergency power source. The backplate is secured via furnished hardware to a recessed junction box. Keyhole slots are provided to facilitate installation. The lens/diffuser snaps to the backplate and can be secured without tools. If option "G" (gasketed) is selected, additional caulking may be required around edges of the backplate to provide a proper weather seal.

Code Compliance

Meets ADA specifications for wall mounted lighting fixtures. NFPA 101, NEC, BOCA, OSHA and IBC illumination standards.

Ordering Information

ER				
Series	Voltage	Lamp Heads	Backplate Color	Options
ER = Thermoplastic Remote Head	1 = 6 V 2 = 12 V	6 V, Tungsten T-5 Wedge Base T6 = 6 W, 6 VDC T7 = 7 W, 6 VDC T9 = 9 W, 6 VDC 6 V, Halogen T-2 1/4 Wedge Base H7 = 7 W, 6 VDC H10 = 10 W, 6 VDC H12 = 12 W, 6 VDC 6 V, Halogen MR11 Style MR5 = Single 5 W MR10 = Double 5 W	12 V, Tungsten T9 = 9 W, 12 VDC T12 = 12 W, 12 VDC T18 = 18 W, 12 VDC 12 V, Halogen H12 = 12 W, 12 VDC 12 V, Halogen MR16 Style ¹ H20 = 20 W, 12 VDC	W = White B = Black G = Gasketed for Outdoor Use ²

Note

- 1) Halogen 20 W, 12 VDC lamp is a MR16 style.
- 2) A form-fitted gasket is supplied to be installed between the luminaire and junction box to protect against water entry. This product is not recommended for use in areas where high wind or high pressure spray washdown could occur.



Philips Lightolier
e: lol.webmaster@philips.com
t: (508) 679-8131
w: www.lightolier.com

ENR-ER Series August 31, 2012

Specifications are subject to change without notice.
© Koninklijke Philips Electronics N.V., 2012. All rights reserved.

Job Information **Type:**