


LL Series

REMOTE-CAPABLE THERMOPLASTIC LED EXIT

Page 1 of 2

LLNUR2

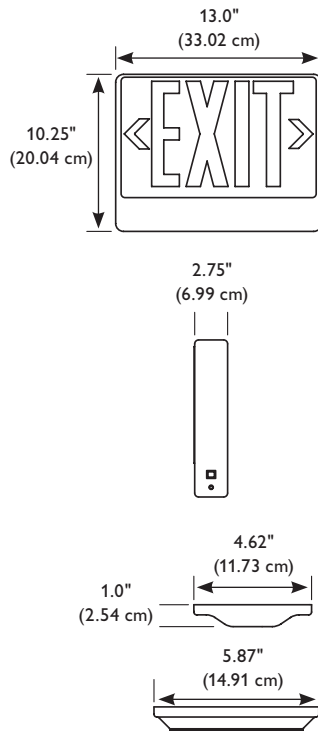

Features

Illumination: Illumination of the exit stencil face is accomplished with long-lasting, high-output Light Emitting Diodes (LEDs). Hot spots and striations are eliminated by the internal "light chamber" specially designed around the high-performance LED array.

Housing: Impact-resistant, UL 94 V-O thermoplastic housing with NFPA-compliant field-selectable chevrons. Chevrons can be easily removed and re-installed. White housing is standard. Stencil face is easily removed for installation, maintenance and inspection. The installation process enables the installer to easily make all wiring connections in the junction box, while all mechanical connections between the exit housing and canopy are made tool free. Universal top, side or back mounting. Canopy furnished with all models. No canopy needed for back-to-wall mounting.

Operating Temperature

Range: Damp Location
50°F (10°C) to 104°F (40°C)

Electronics:

120/277 VAC dual voltage input with surge-protection, solid-state circuitry provides for a reliable charging system. Standard features include low-voltage disconnect, A/C lockout, and brownout protection.

Electrical Specifications:

Red:

0.027 A (120 VAC)

0.012 A (277 VAC)

Green:

0.030 A (120 VAC)

0.014 A (277 VAC)

Code Compliance

UL 924 and UL damp location listed. NFPA 101, NEC, BOCA, OSHA and IBC illumination standards

Warranty

Five year full electronics warranty. One year full plus four year prorated battery warranty.

Job Information Type:

Job Name:

Cat. No.:

Notes:

PHILIPS
LIGHTOLIER

LL Series

REMOTE-CAPABLE THERMOPLASTIC LED EXIT

Page 2 of 2

Ordering Information

LL	N	U			
Series	Battery	# of Faces	Letter Color	Face/Housing Color	Remote Capacity Options
LL = LL Series LED Exit	N = Lead Calcium	U = Universal	R = Red G = Green	W = White B = Black ¹	2 = 12 W Remote Capacity (6 V) 3 = 22 W Remote Capacity (6 V)

Note

*Standard product is furnished with white housing, white stencil and canopy for universal mounting, single, or double face.

1) Black finish available with red letters only.



Philips Lightolier
e: lol.webmaster@philips.com
t: (508) 679-8131
w: www.lightolier.com

LL Series - Remote September 20, 2011

Specifications are subject to change without notice.

© Koninklijke Philips Electronics N.V., 2011. All rights reserved.

Job Information	Type:
------------------------	--------------