


# LVL Remote Series

## Vandal-Resistant Wet/Damp Location Remote

Page 1 of 2

### LVLRW

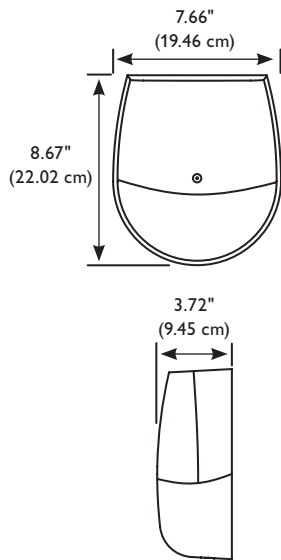

### Features

**Illumination:** Illumination is provided by two high-performance 6 VDC, 5.5 W or 12 VDC, 12 W MR16-style halogen lamps. Lamps are held in an attractive molded swivel assembly, and are fully adjustable.

### Housing:

The high-abuse housing and backplate are molded from high-impact, F1 rated, GE Lexan® polycarbonate. All injection molded components meet the UL 94 V-0, 5 VA flame retardant standard for emergency lighting products. White housing is standard, an optional black or bronze housing is available. All units are supplied standard with a UL wet location listing and tamperproof screw kit. Standard non-tamperproof screws are also included with the product. Installation is simplified by the use of a snap-together backplate and housing. When installed with the supplied tamperproof screw kit, removal from mounting surface, or removal of outer protective cover is not possible under normal service conditions without the use of a torx T-15 bit (supplied with product).

### Operating Temperature

#### Range:

-49°F (-45°C) to 140°F (60°C)

### Code Compliance

UL 924 and UL wet location listed. NFPA 101, NEC, BOCA, OSHA and IBC illumination standards.

### Job Information Type:

Job Name:

Cat. No.:

Notes:

**PHILIPS**

**LIGHTOLIER**

# LVL Remote Series

## Vandal-Resistant Wet/Damp Location Remote

Page 2 of 2

### Ordering Information

**LVL**

Series

**LVL** = LVL Series  
Wet Location Remote

**R**

Remote

**R** = Remote Operation

Housing Color

**W** = White  
**B** = Black  
**BZ** = Bronze


Lamp Type

**Blank** = 6 V, 5.5 W MR16  
**12** = 12 V, 12 W MR16

**Accessories (order as a separate item)**

**T15TPTOOL** = Tamperproof Screwdriver

### Optics

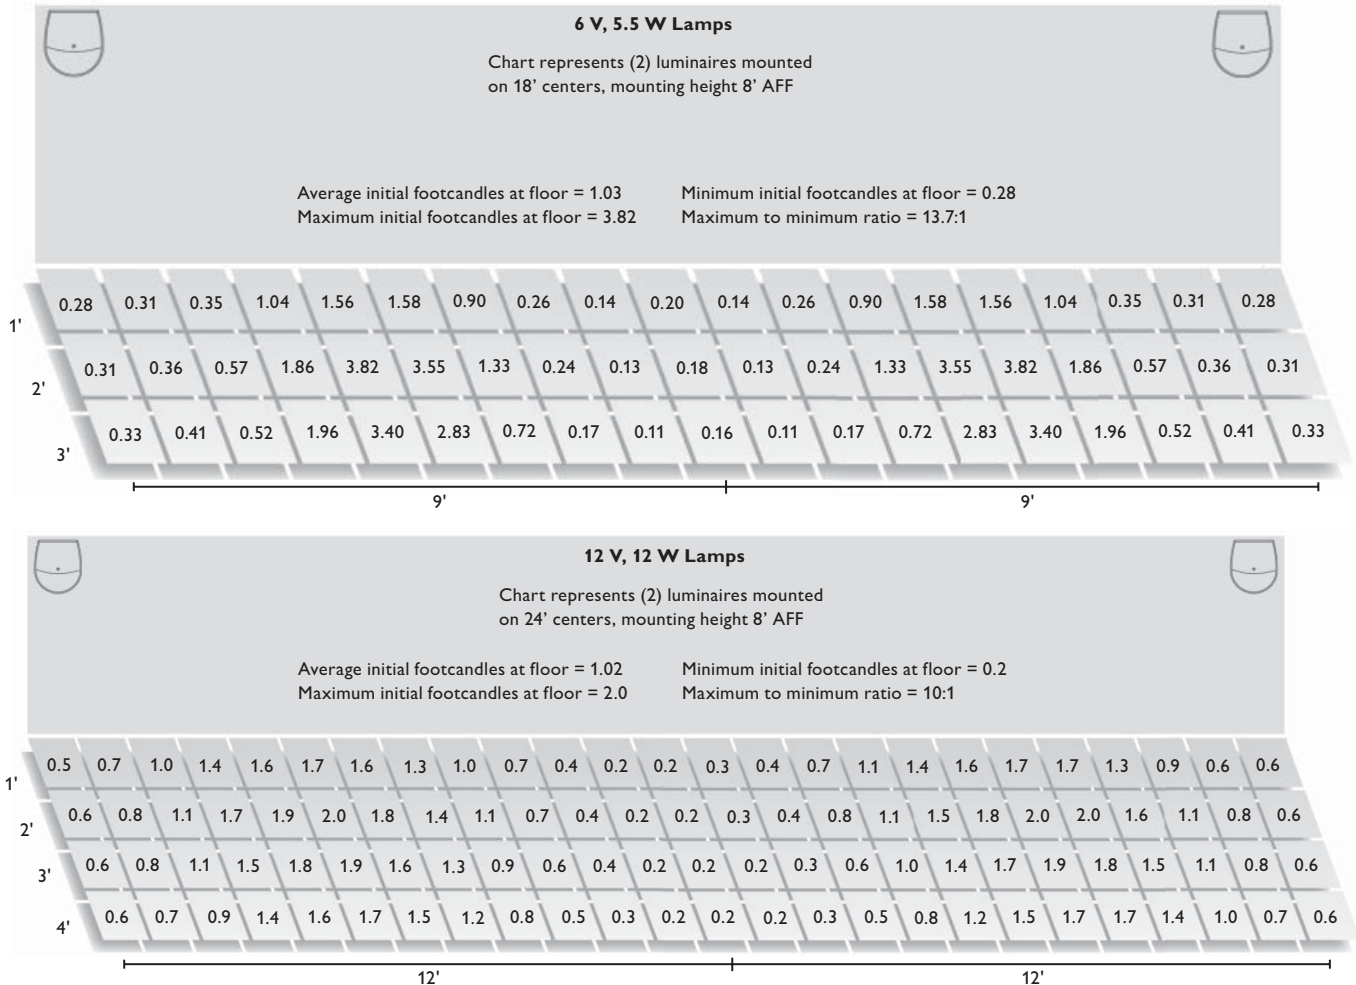

\* The optics layout shown is intended to be used as reference only. Standard reflectances used were 80/50/20. Lightolier is not responsible for site specific conditions that may alter the results.



Philips Lightolier  
e: [lol.webmaster@philips.com](mailto:lol.webmaster@philips.com)  
t: (508) 679-8131  
w: [www.lightolier.com](http://www.lightolier.com)

LVL Remote Series May 16, 2012

Specifications are subject to change without notice.  
© Koninklijke Philips Electronics N.V., 2012. All rights reserved.

**Job Information** Type: