
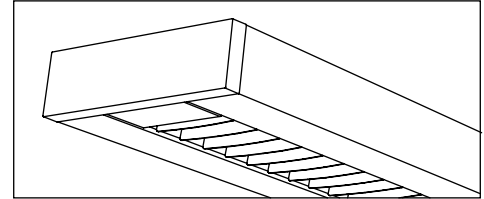


# LyteSpread 9 Inch

## Lighting Systems, T5HO, L916H03WN

Page 1 of 2

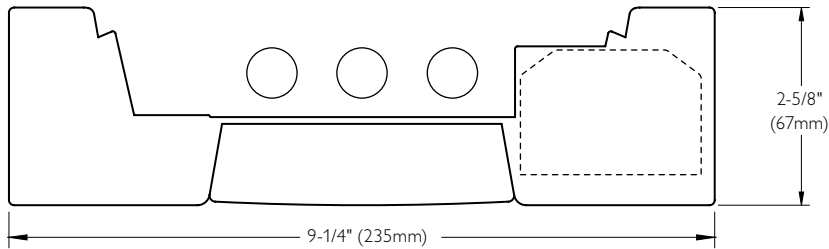

### Ordering Information

Style	Lamps	Lower Optics	Upper Optics	Length	Wiring	Voltage	Ballast	Color & Finish
<b>L916</b>	<b>H03</b>	<b>W</b>					<b>E</b>	<b>W</b>
Direct-Indirect								
	<b>H03</b> = 3-Lamp	<b>W</b> = White Louver (15*)	<b>N</b> = None <b>D</b> = 60% Down Kit <b>G</b> = 80% Down Kit <b>J</b> = 100% Down Kit <b>U</b> = 80% Up Kit	Enter the total run length in feet (4ft increments)	<b>1</b> = 1 circuit <b>2</b> = 2 circuit <b>3</b> = 1 circuit w/ Emergency circuit <b>4</b> = 2 circuit w/ Emergency circuit <b>5</b> = 1 circuit w/ Battery Pack <b>6</b> = 2 circuit w/ Battery Pack <b>7</b> = 1 circuit Dimming	<b>D</b> = Dual 120v/277v <b>1</b> = 120v** <b>2</b> = 277v** <b>3</b> = 347v**	<b>E</b> = Standard Ballast	<b>W</b> = High Reflective White

\* Number of louver cells per 4ft section

\*\* Dimming and Battery Pack fixtures must be voltage specific.

### Housing

6063 T5 extruded aluminum. Fixture weighs 3.0 lb/ft. Aluminum die-cast endcaps, baked powder coat finish for color. Self-aligning joining system.

### Optical System

Constructed of 96% reflective white steel to produce a direct/indirect distribution. White louver blades are spaced 1.3" apart and are 1.1" deep (34 cells per 4ft section). Optional field-installable Variable Optics kits provide additional up or downlight as required.

### Mounting

Fixed position mounts supplied standard at ends. Variable position mounts supplied standard at joints. Variable position mounts can be located on 8ft or 12ft modules within 12" of joint or end. Aircraft cable gripper is tamper-resistant and provides infinite vertical adjustment capability. Aircraft cable, crimp and cable gripper independently tested to meet stringent safety requirements.

### Electrical

Factory pre-wired to section ends with quick-wire connectors. Ballast is electronic.

### Approvals

Certified to UL and CSA standards.

### Finish

High-quality powder coat. Available in white textured matte finish and a selection of other factory and customer specified colors. Consult factory for details.

Job Information	Type:
Job Name:	
Cat. No.:	
Notes:	

**PHILIPS**  
**LIGHTOLIER**


# LyteSpread 9 Inch

## Lighting Systems, T5HO, L916H03WN

Page 2 of 2

### Photometry Optics WN White Louver

#### Candela Curve

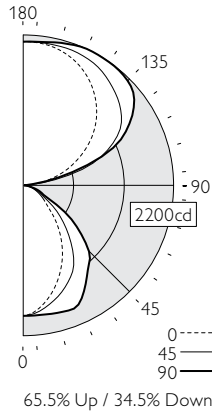

Report # 2101265  
 Filename 7216H03WN.ies  
 Efficiency 86.2%  
 Peak Candela Value\* 2192 @ 153°  
 Peak to Zenith Ratio\* 1 : 1  
 \* Between 90-180° vertical angle  
 Meets RP-1-04 recommendations for  
 VDT-Intensive spaces

#### Candela Distribution

Vertical Angle	0	22.5	45	67.5	90	Zonal Lumens
0	1898	1898	1898	1898	1898	
5	1849	1849	1872	1890	1901	180
15	1619	1637	1734	1854	1921	493
25	1315	1358	1552	1778	1913	722
35	973	1040	1287	1450	1624	791
45	618	685	891	1141	1362	708
55	372	381	529	690	862	495
65	233	237	271	290	330	277
75	125	119	138	140	173	146
85	39	30	40	32	42	43
90	11	12	14	14	12	
95	130	134	109	49	53	151
105	494	745	895	742	746	785
115	869	1115	1449	1536	1577	1304
125	1228	1403	1755	1938	1975	1493
135	1520	1649	1904	2102	2157	1446
145	1755	1834	2017	2147	2189	1249
155	1930	1968	2076	2165	2192	955
165	2040	2052	2092	2133	2145	592
175	2087	2088	2093	2096	2096	203
180	2090	2090	2090	2090	2090	

#### Coefficients of Utilization (%)

Ceiling:	80				70			50			0
Wall:	70	50	30	10	70	50	30	50	30	10	0
0 RCR	88	88	88	88	79	79	79	63	63	63	27
1	81	77	74	71	73	70	67	56	54	52	24
2	74	68	63	59	66	61	57	49	46	44	20
3	68	60	54	49	61	54	49	44	40	37	18
4	62	53	47	42	56	48	43	39	35	32	15
5	57	47	41	36	51	43	37	35	31	28	14
6	52	43	36	31	47	39	33	31	27	24	12
7	48	38	32	27	43	35	29	28	24	21	11
8	45	35	28	24	40	32	26	26	22	19	10
9	42	32	25	21	38	29	23	24	20	17	9
10	39	29	23	19	35	26	21	22	18	15	8

Based on a floor reflectance of 0.2

#### Avg. Luminance (cd/m²)

Vertical Angle	0	45	90
55	5287	7518	12251
65	4494	5227	6365
75	3937	4346	5449
85	3648	3741	3928

#### Upgrades & Accessories

Please indicate with check mark

- ☐ Lamps Included
- ☐ Lamps Included and Installed
- ☐ Daylight Harvesting System

☐ Lamp Guard

Not available with upper optics option U

#### Mounting Hardware

##### Mount Type

Consult separate mounting spec sheet for mount type options.

##### Suspension Length


Enter distance from ceiling to top of fixture in inches.

#### Modules

Module length excludes endcaps. Nominal mount spacing for individually mounted modules with fixed position mounts.


Module	Mount Spacing
4ft	4' 0"
8ft	8' 0"
12ft	12' 0"

#### Endcap



#### Mounting in Runs

Fixed position mounts supplied standard at ends. Variable position mounts supplied standard at joints. Variable position mounts cannot be located on 4ft modules. Optional variable position mounts at ends available upon request (8ft and 12ft modules only).

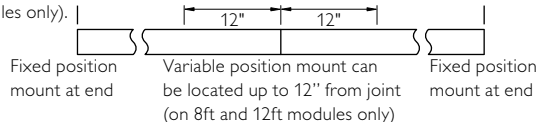

#### Upper Optics




D 60% Down Kit



J 100% Down Kit



G 80% Down Kit



U 80% Up Kit



Philips Lightolier  
 e: lol.webmaster@philips.com  
 t: (508) 679-8131  
 w: www.lightolier.com

L916H03WN June 9, 2011

Specifications are subject to change without notice.  
 © Koninklijke Philips Electronics N.V., 2011. All rights reserved.

Job Information Type: