


LyteSpread Elliptical

Lighting Systems, T8, LE16T03WN

Page 1 of 2

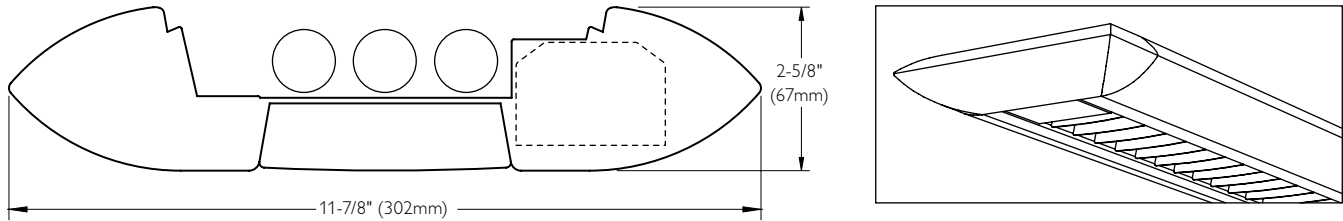

Ordering Information

Style	Lamps	Lower Optics	Upper Optics	Length	Wiring	Voltage	Ballast	Color & Finish
LE16	T03	W					E	W
Direct-Indirect								
	T03 = 3-Lamp	W = White Louver (15*)	N = None D = 60% Down Kit G = 80% Down Kit J = 100% Down Kit U = 80% Up Kit	Enter the total run length in feet (4ft increments)	1 = 1 circuit 2 = 2 circuit 3 = 1 circuit w/ Emergency circuit 4 = 2 circuit w/ Emergency circuit 5 = 1 circuit w/ Battery Pack 6 = 2 circuit w/ Battery Pack 7 = 1 circuit Dimming	D = Dual 120v/277v 1 = 120v** 2 = 277v** 3 = 347v**	E = Standard Ballast	W = High Reflective White

* Number of louver cells per 4ft section

** Dimming and Battery Pack fixtures must be voltage specific.

Housing

6063 T5 extruded aluminum. Fixture weighs 3.8 lb/ft. Aluminum die-cast endcaps, baked powder coat finish for color. Self-aligning joining system.

Optical System

Constructed of 96% reflective white steel to produce a direct/indirect distribution. White louver blades are spaced 1.3" apart and are 1.1" deep (34 cells per 4ft section). Optional field-installable Variable Optics kits provide additional up or downlight as required.

Mounting

Fixed position mounts supplied standard at ends. Variable position mounts supplied standard at joints. Variable position mounts can be located on 8ft or 12ft modules within 12" of joint or end. Aircraft cable gripper is tamper-resistant and provides infinite vertical adjustment capability. Aircraft cable, crimp and cable gripper independently tested to meet stringent safety requirements.

Electrical

Factory pre-wired to section ends with quick-wire connectors. Ballast is electronic.

Approvals

Certified to UL and CSA standards.

Finish

High-quality powder coat. Available in white textured matte finish and a selection of other factory and customer specified colors. Consult factory for details.

Job Information	Type:
Job Name:	
Cat. No.:	
Notes:	

PHILIPS
LIGHTOLIER


LyteSpread Elliptical

Lighting Systems, T8, LE16T03WN

Page 2 of 2

Photometry Optics WN White Louver

Candela Curve

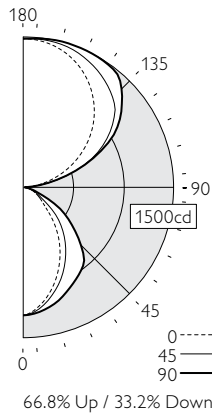

Report # 2101260
Filename 7216T03WN.ies
Efficiency 85.4%
Peak Candela Value* 1497 @ 163°
Peak to Zenith Ratio* 1 : 1
* Between 90-180° vertical angle
Meets RP-1-04 recommendations for
VDT-Intensive spaces

Candela Distribution

Vertical Angle	0	22.5	45	67.5	90	Zonal Lumens
0	1270	1270	1270	1270	1270	
5	1227	1228	1242	1250	1258	118
15	1062	1068	1108	1159	1197	313
25	850	866	937	1022	1100	436
35	617	632	739	877	1006	478
45	372	395	533	680	815	424
55	218	224	301	420	551	299
65	136	136	157	200	276	176
75	72	72	81	81	103	86
85	20	20	27	26	30	29
90	7	9	12	13	13	
95	71	97	93	64	90	106
105	289	421	450	414	446	435
115	542	700	820	823	856	749
125	785	911	1089	1136	1177	918
135	1002	1090	1262	1354	1386	944
145	1182	1243	1357	1448	1483	842
155	1323	1360	1426	1477	1495	654
165	1419	1436	1468	1490	1497	414
175	1468	1470	1478	1482	1483	143
180	1474	1474	1474	1474	1474	

Coefficients of Utilization (%)

Ceiling:	80				70			50			0
Wall:	70	50	30	10	70	50	30	50	30	10	0
0 RCR	87	87	87	87	78	78	78	62	62	62	26
1	80	77	73	71	72	69	66	55	53	51	23
2	73	67	62	58	66	61	57	48	45	43	20
3	67	59	53	49	60	54	49	43	39	37	17
4	61	53	46	41	55	48	42	38	34	31	15
5	56	47	40	36	50	43	37	34	30	27	13
6	52	42	36	31	46	38	33	31	27	24	12
7	48	38	32	27	43	35	29	28	24	21	10
8	44	34	28	24	40	31	26	25	21	18	9
9	41	31	25	21	37	29	23	23	19	17	9
10	38	29	23	19	35	26	21	21	18	15	8

Based on a floor reflectance of 0.2

Avg. Luminance (cd/m²)

Vertical Angle	0	45	90
55	3098	4278	7831
65	2623	3028	5324
75	2268	2551	3244
85	1871	2525	2806

Upgrades & Accessories

Please indicate with check mark

<input type="checkbox"/> Lamps Included	<input type="checkbox"/> Lamp Guard	
<input type="checkbox"/> Lamps Included and Installed	Not available with upper optics option U	
<input type="checkbox"/> Daylight Harvesting System	<input type="checkbox"/> Dust Cover	

Mounting Hardware


<input type="checkbox"/>	<input type="checkbox"/>
Mount Type	Suspension Length
Consult separate mounting spec sheet for mount type options.	Enter distance from ceiling to top of fixture in inches.

Modules

Module length excludes endcaps. Nominal mount spacing for individually mounted modules with fixed position mounts.


Module	Mount Spacing
4ft	4' 0"
8ft	8' 0"
12ft	12' 0"

Endcap




Mounting in Runs

Fixed position mounts supplied standard at ends. Variable position mounts supplied standard at joints. Variable position mounts cannot be located on 4ft modules. Optional variable position mounts at ends available upon request (8ft and 12ft modules only).



Upper Optics

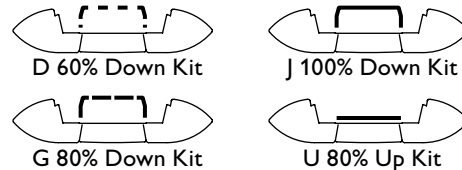

Philips Lightolier
e: lol.webmaster@philips.com
t: (508) 679-8131
w: www.lightolier.com

LE16T03WN June 9, 2011

Specifications are subject to change without notice.
© Koninklijke Philips Electronics N.V., 2011. All rights reserved.

Job Information Type: