
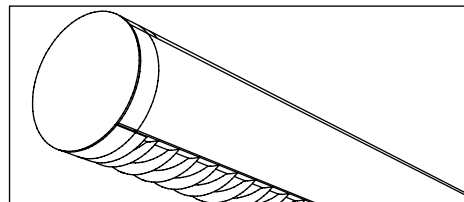


Lighting Systems, T8, RT65T21AN

Page 1 of 2



Ordering Information

Style	Lamps	Lower Optics	Upper Optics	Length	Wiring	Voltage	Ballast	Color & Finish
RT65	T21	A	N				E	W
Direct/Indirect								
		A = Curved Acrylic Lens	N = None					
	T21 = 3-Lamp							
				Enter the total run length in feet (4ft increments)	1 = 1 circuit 2 = 2 circuit 3 = 1 circuit w/ Emergency circuit 4 = 2 circuit w/ Emergency circuit 5 = 1 circuit w/ Battery Pack 6 = 2 circuit w/ Battery Pack 7 = 1 circuit Dimming	D = Dual 120v/277v 1 = 120v* 2 = 277v* 3 = 347v*	E = Standard Ballast	W = High Reflective White

* Dimming and Battery Pack fixtures must be voltage specific.

Housing

6063 T5 extruded aluminum. Fixture weighs 4.4 lb/ft. Aluminum die-cast endcaps, baked powder coat finish for color. Self-aligning joining system.

Optical System

Constructed of highly reflective 24 gauge metal. Reflectors are highly-specular aluminum. Curved lens is constructed of acrylic.

Mounting

Aircraft cable gripper is tamper-resistant and provides infinite vertical adjustment capability. Aircraft cable, crimp and cable gripper independently tested to meet stringent safety requirements. Wall mount brackets are available.

Electrical

Factory pre-wired to section ends with quick-wire connectors. Ballast is electronic.

Approvals

Certified to UL and CSA standards.

Finish

High-quality powder coat. Available in white textured matte finish and a selection of other factory and customer specified colors. Consult factory for details.

Job Information	Type:
Job Name:	
Cat. No.:	
Notes:	


PHILIPS
LIGHTOLIER

Lighting Systems, T8, RT65T21AN

Page 2 of 2

Photometry Optics AN Curved Acrylic Lens (Down)

Candela Curve

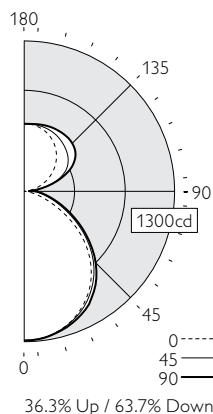

Report # 866521AN
 Filename 8665T21AN.ies
 Efficiency 66.2%
 Peak Candela Value* 600 @ 150°
 Peak to Zenith Ratio* 1 : 1
 * Between 90-180° vertical angle

Meets RP-1-04 recommendations for
 VDT-Intensive spaces

Candela Distribution

Vertical Angle	Horizontal Angle				Zonal Lumens
	0	22.5	45	67.5	90
0	1282	1282	1282	1282	1282
5	1276	1274	1276	1276	1278
15	1230	1225	1230	1230	1238
25	1134	1127	1146	1153	1168
35	993	985	1017	1035	1051
45	800	795	845	858	874
55	557	562	628	639	655
65	298	332	406	418	437
75	115	161	235	247	260
85	17	63	119	132	144
90	1	37	89	98	112
95	19	42	69	54	76
105	104	194	244	221	253
115	207	294	387	405	434
125	306	366	464	515	542
135	393	431	509	563	586
145	467	489	543	581	599
155	524	534	567	590	599
165	561	564	578	589	592
175	579	579	580	582	582
180	581	581	581	581	581

Coefficients of Utilization (%)

Ceiling: Wall:	80				70				50				0
	70	50	30	10	70	50	30	10	50	30	10	0	0
0 RCR	72	72	72	72	68	68	68	59	59	59	40		
1	66	63	60	58	61	59	56	51	50	48	33		
2	60	55	51	47	56	51	48	45	42	40	28		
3	55	48	43	39	51	45	41	40	36	33	24		
4	50	43	37	33	46	40	35	35	31	28	20		
5	46	38	32	28	43	36	31	31	27	24	17		
6	42	34	28	25	39	32	27	28	24	21	15		
7	39	31	25	21	36	29	24	26	22	19	13		
8	36	28	23	19	34	26	21	23	19	17	12		
9	34	25	20	17	31	24	19	21	17	15	11		
10	31	23	18	15	29	22	18	20	16	13	10		

Based on a floor reflectance of 0.2

Avg. Luminance (cd/m²)

Vertical Angle	Horizontal Angle		
	0	45	90
55	7256	5436	4978
65	5269	4083	3729
75	3320	2925	2619
85	1457	2024	1839

Upgrades & Accessories Please indicate with check mark

- ☐ Lamps Included ☐ Wall Mount Bracket
- ☐ Lamps Included and Installed
- ☐ Intersections


Modules

Module length excludes endcaps. Nominal
 mount spacing for individually mounted
 modules with fixed position mounts.

Module	Mount Spacing
4ft	4' 0"
8ft	8' 0"
12ft	12' 0"

Intersections

Optional mitered aluminum extrusion intersections available in L, T or X configurations. Consult factory for assistance with ordering.

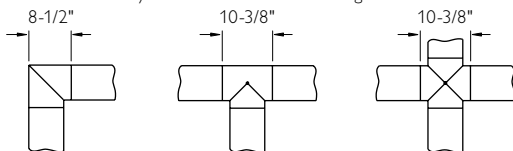

Mounting Hardware



Mount Type


Consult separate mounting spec
 sheet for mount type options.



Suspension Length

Enter distance from ceiling
 to top of fixture in inches.

Endcap



Wall Mount Bracket

- Optional wall mount bracket available.
- Mounts variable within 6" of end or joint.
- Minimum one mount per fixture end or joint. (Note: Mount is not continuous, and therefore fixture is not flush with wall.)
- Side-mounted 4" x 2-1/2" utility box (supplied by others).



Philips Lightolier
 e: lol.webmaster@philips.com
 t: (508) 679-8131
 w: www.lightolier.com

RT65T21AN March 27, 2011

Specifications are subject to change without notice.
 © Koninklijke Philips Electronics N.V., 2011. All rights reserved.

Job Information Type: