
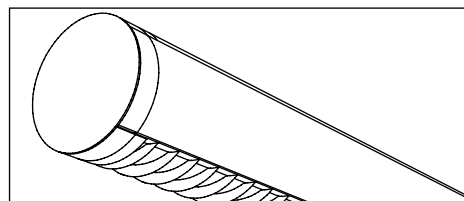


Lighting Systems, T8, RT65T12AA

Page 1 of 2

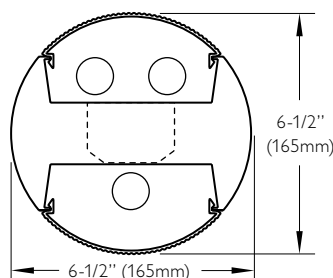

Ordering Information

Style	Lamps	Lower Optics	Upper Optics	Length	Wiring	Voltage	Ballast	Color & Finish
RT65	T12	A	A				E	W
Direct/Indirect								
		A = Curved Acrylic Lens	A = Curved Acrylic Lens					
	T12 = 3-Lamp							
				Enter the total run length in feet (4ft increments)	1 = 1 circuit 2 = 2 circuit 3 = 1 circuit w/ Emergency circuit 4 = 2 circuit w/ Emergency circuit 5 = 1 circuit w/ Battery Pack 6 = 2 circuit w/ Battery Pack 7 = 1 circuit Dimming	D = Dual 120v/277v 1 = 120v* 2 = 277v* 3 = 347v*	E = Standard Ballast	W = High Reflective White

* Dimming and Battery Pack fixtures must be voltage specific.

Housing

6063 T5 extruded aluminum. Fixture weighs 4.4 lb/ft. Aluminum die-cast endcaps, baked powder coat finish for color. Self-aligning joining system.

Optical System

Constructed of highly reflective 24 gauge metal. Reflectors are highly-specular aluminum. Curved lens is constructed of acrylic.

Mounting

Aircraft cable gripper is tamper-resistant and provides infinite vertical adjustment capability. Aircraft cable, crimp and cable gripper independently tested to meet stringent safety requirements. Wall mount brackets are available.

Electrical

Factory pre-wired to section ends with quick-wire connectors. Ballast is electronic.

Approvals

Certified to UL and CSA standards.

Finish

High-quality powder coat. Available in white textured matte finish and a selection of other factory and customer specified colors. Consult factory for details.

Job Information	Type:
Job Name:	
Cat. No.:	
Notes:	

PHILIPS
LIGHTOLIER

Lighting Systems, T8, RT65T12AA

Page 2 of 2

Photometry

Optics AA Curved Acrylic Lens (Down & Up)

Upgrades & Accessories Please indicate with check mark

<input type="checkbox"/> Lamps Included	<input type="checkbox"/> Wall Mount Bracket
<input type="checkbox"/> Lamps Included and Installed	
<input type="checkbox"/> Intersections	


Modules

Module length excludes endcaps. Nominal mount spacing for individually mounted modules with fixed position mounts.

Module	Mount Spacing
4ft	4' 0"
8ft	8' 0"
12ft	12' 0"

Intersections


Optional mitered aluminum extrusion intersections available in L, T or X configurations. Consult factory for assistance with ordering.

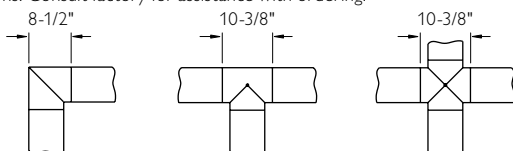**Mounting Hardware**☐**Mount Type**

Consult separate mounting spec sheet for mount type options.

☐**Suspension Length**

Enter distance from ceiling to top of fixture in inches.

Endcap**Wall Mount Bracket**

- Optional wall mount bracket available.
- Mounts variable within 6" of end or joint.
- Minimum one mount per fixture end or joint. (Note: Mount is not continuous, and therefore fixture is not flush with wall.)
- Side-mounted 4" x 2-1/2" utility box (supplied by others).



Philips Lightolier
e: lol.webmaster@philips.com
t: (508) 679-8131
w: www.lightolier.com

RT65T12AA March 27, 2011

Specifications are subject to change without notice.
© Koninklijke Philips Electronics N.V., 2011. All rights reserved.

Job Information	Type:
------------------------	--------------