
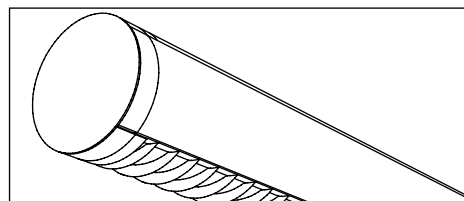


Lighting Systems, T8, RT65T22CA

Page 1 of 2

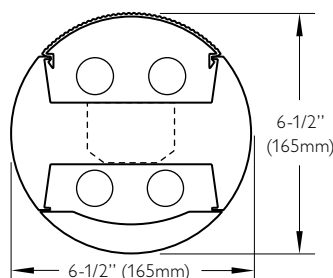

Ordering Information

Style	Lamps	Lower Optics	Upper Optics	Length	Wiring	Voltage	Ballast	Color & Finish
<div>RT65</div>	<div>T22</div>	<div>C</div>	<div>A</div>				<div>E</div>	<div>W</div>
Direct/Indirect								
	T22 = 4-Lamp	C = Curved Baffle	A = Curved Acrylic Lens		1 = 1 circuit 2 = 2 circuit 3 = 1 circuit w/ Emergency circuit 4 = 2 circuit w/ Emergency circuit 5 = 1 circuit w/ Battery Pack 6 = 2 circuit w/ Battery Pack 7 = 1 circuit Dimming	D = Dual 120v/277v 1 = 120v* 2 = 277v* 3 = 347v*	E = Standard Ballast	W = High Reflective White
				Enter the total run length in feet (4ft increments)				

* Dimming and Battery Pack fixtures must be voltage specific.

Housing

6063 T5 extruded aluminum. Fixture weighs 4.4 lb/ft. Aluminum die-cast endcaps, baked powder coat finish for color. Self-aligning joining system.

Optical System

Constructed of highly reflective 24 gauge metal. Reflectors are highly-specular aluminum. Curved lens is constructed of acrylic. Curved baffles are 13/16" deep and 2" on center.

Mounting

Aircraft cable gripper is tamper-resistant and provides infinite vertical adjustment capability. Aircraft cable, crimp and cable gripper independently tested to meet stringent safety requirements. Wall mount brackets are available.

Electrical

Factory pre-wired to section ends with quick-wire connectors. Ballast is electronic.

Approvals

Certified to UL and CSA standards.

Finish

High-quality powder coat. Available in white textured matte finish and a selection of other factory and customer specified colors. Consult factory for details.

Job Information	Type:
Job Name:	
Cat. No.:	
Notes:	

PHILIPS
LIGHTOLIER

Lighting Systems, T8, RT65T22CA

Page 2 of 2

Photometry

Optics CA Curved Baffle (Down) / Curved Acrylic Lens (Up)

Upgrades & Accessories Please indicate with check mark

<input type="checkbox"/> Lamps Included	<input type="checkbox"/> Wall Mount Bracket
<input type="checkbox"/> Lamps Included and Installed	
<input type="checkbox"/> Intersections	

Mounting Hardware☐**Mount Type**

Consult separate mounting spec sheet for mount type options.


☐**Suspension Length**

Enter distance from ceiling to top of fixture in inches.


Modules

Module length excludes endcaps. Nominal mount spacing for individually mounted modules with fixed position mounts.

Module	Mount Spacing
4ft	4' 0"
8ft	8' 0"
12ft	12' 0"

Endcap**Intersections**

Optional mitered aluminum extrusion intersections available in L, T or X configurations. Consult factory for assistance with ordering.

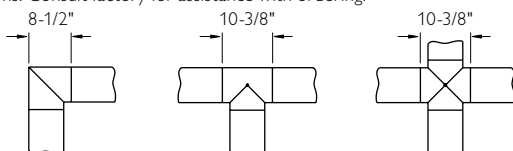**Wall Mount Bracket**

- Optional wall mount bracket available.
- Mounts variable within 6" of end or joint.
- Minimum one mount per fixture end or joint. (Note: Mount is not continuous, and therefore fixture is not flush with wall.)
- Side-mounted 4" x 2-1/2" utility box (supplied by others).



Philips Lightolier
e: lol.webmaster@philips.com
t: (508) 679-8131
w: www.lightolier.com

RT65T22CA March 27, 2011

Specifications are subject to change without notice.
© Koninklijke Philips Electronics N.V., 2011. All rights reserved.

Job Information	Type:
------------------------	--------------