

# MJ2 Series

## CHICAGO STEEL UNIT

Page 1 of 2

### MJ2132LH12W



#### Features

**Illumination:** High output incandescent sealed beam lamps provide glare-free light distribution. 6 or 12 V, 12 W bi-pin halogen has an expected life of 100 hours.

**Housing:** Heavy duty steel cabinet is finished in neutral cream baked-on powder paint providing scratch and corrosion resistance. All metal lamp housing and swivel assemblies in neutral cream color to match unit housing. Lamp heads are fully adjustable and feature lockable swivels.

**Battery:** Maintenance-free, sealed, lead calcium battery has an estimated service life of 5 years, and an operating temperature range of 68°F (20°C) to 86°F (30°C). Nickel cadmium batteries are optional.

**Electronics:** 120/277 VAC dual voltage input with surge-protected, solid-state circuitry. Fully automatic, temperature compensating, variable rate float charging system is complete with low voltage disconnect, AC lockout, brownout protection, AC indicator lamp and test switch.

#### Code Compliance

All models are UL 924 listed and meet NFPA 101 Life Safety Code, NEC, OSHA and City of Chicago codes.

#### Warranty

Three year unit warranty (excludes lamps). One year full plus four year prorated battery warranty (lead calcium). Five year full plus five year prorated battery warranty (nickel cadmium).

#### Job Information Type:

Job Name:

Cat. No.:

Notes:

**PHILIPS**  
**LIGHTOLIER**

# MJ2 Series

## CHICAGO STEEL UNIT


Page 2 of 2

### Ordering Information

<b>MJ2</b>			<b>H12</b>	<b>W</b>	
Series	Voltage	Battery Wattage	Lamp Type	Housing Color	Factory Installed Options
<b>MJ2</b> = Chicago Steel Unit	<b>1</b> = 6 V <b>2</b> = 12 V	6 V, Lead Calcium <b>32L</b> = 32 W <b>52L</b> = 52 W  12 V, Lead Calcium <b>104L</b> = 104 W  6 V, Nickel Cadmium <b>26N</b> = 26 W  12 V, Nickel Cadmium <b>30N</b> = 30 W <b>52N</b> = 52 W	<b>H12</b> = Halogen 12 W	<b>W</b> = Neutral Cream	<b>V</b> = Voltmeter <sup>1</sup> <b>A</b> = Ammeter <sup>1</sup> <b>A1H</b> = Add One Lighting Head (25 & 30 W units) <b>LC</b> = 3-Conductor Line Cord - 120 VAC <b>TD-120</b> = 15-Minute Re-Transfer Time Delay (120 V) <b>TD-277</b> = 15-Minute Re-Transfer Time Delay (277 V) <b>B</b> = Black Finish - Housing and Lamp Heads <b>SX</b> = Self-Diagnostic Circuit
Note 1) Unit has provisions for one meter option only.					

### Accessories (order as a separate item)

**MJB1** = Mounting Bracket  
**MJS1** = Mounting Shelf (25 & 30 W units)  
**MJS2** = Mounting Shelf (50 W units)  
**MJS3** = Mounting Shelf (72 & 100 W units)  
**MJS6** = Mounting Shelf (125 & 250 W units)  
**MJPG1** = Wire Guard (6 V models)  
**MJPG2** = Wire Guard (12 V models)  
**MJ908W08** = Matching Remote Head - Single (6 V, 12 W Halogen)  
**MJ908W54** = Matching Remote Head - Single (12 V, 12 W Halogen)  
**MJ909W08** = Matching Remote Head - Double (6 V, 12 W Halogen)  
**MJ909W54** = Matching Remote Head - Double (12 V, 12 W Halogen)

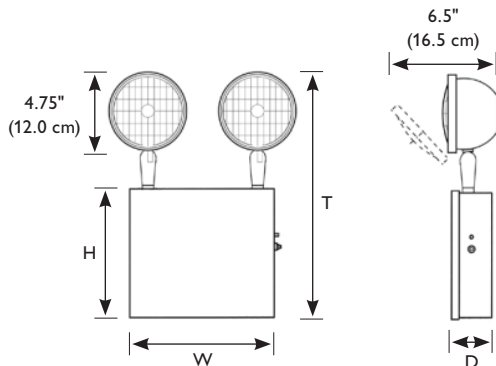

DIMENSIONS				
MODEL #	D"	W"	H"	T"
<b>MJ2132L/26N/30N</b>	2.875" (7.3 cm)	9.0" (22.9 cm)	8.135" (20.6 cm)	14.135" (35.9 cm)
<b>MJ2152L/N</b>	2.875" (7.3 cm)	12.25" (31.1 cm)	8.25" (21.0 cm)	14.25" (36.2 cm)
<b>MJ22104L</b>	4.135" (10.5 cm)	12.25" (31.1 cm)	8.25" (21.0 cm)	14.25" (36.2 cm)



Philips Lightolier  
 e: [lol.webmaster@philips.com](mailto:lol.webmaster@philips.com)  
 t: (508) 679-8131  
 w: [www.lightolier.com](http://www.lightolier.com)

MJ2 Series September 19, 2011

Specifications are subject to change without notice.  
 © Koninklijke Philips Electronics N.V., 2011. All rights reserved.

**Job Information** Type: