
MJ4 Series

CHICAGO STEEL RECESSED UNIT

Page 1 of 2

MJ4126LH12W



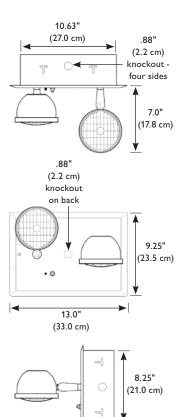

(8.9 cm)

Features

Illumination: High-output incandescent sealed beam lamps provide glare-free light distribution. 6 V, 12 W bi-pin halogen has an expected life of 100 hours.

Housing: Heavy-duty steel cabinet is finished in white baked-on powder paint providing scratch and corrosion resistance. Optional black and special color paint finishes are available, see options on back for ordering details. All metal lamp housing and swivel assemblies in white color to match unit housing. Lamp heads are fully adjustable and feature lockable swivels. Units are designed for recessed installation in wall and ceiling applications by T-slot holes provided on all four sides of the unit housing. Mounting bars (supplied by others) allow XC-R-C unit installation in T-grid type suspended ceilings.

Battery: Maintenance-free, sealed, lead calcium battery has an estimated service life of 5 years, and an operating temperature range of 65°F (19°C) to 85°F (30°C). Nickel cadmium batteries are optional.

Electronics: 120/277 VAC dual voltage input with surge-protected, solid-state circuitry. Fully automatic, temperature compensating, variable rate float charging system is complete with low voltage disconnect, AC lockout, brownout protection, AC indicator lamp and test switch.

Code Compliance

All models are UL 924 listed and meet NFPA 101 Life Safety Code, NEC, OSHA and City of Chicago codes.

Warranty

Three year unit warranty (excludes lamps). One year full plus four year prorated battery warranty (lead calcium). Five year full plus five year prorated battery warranty (nickel cadmium).

Job Information	Туре:
Job Name:	
Cat. No.:	
Notes:	





Page 2 of 2

Ordering Information

MJ4 Series Voltage Battery Wattage

26L = 26 W,

Lead Calcium

26N = 26 W,

Nickel Cadmium

H12 W Lamp Type

H12 = Halogen

12 W

Housing Color

W = White

Factory Installed Options

 $\mathbf{V} = Voltmeter^1$

A = Ammeter¹

 ${f B}$ = Black Finish - Housing and Lamp Heads

SP = Special Paint Finish - Specify Color

SX = Self-Diagnostic Circuit

Accessories (order as a separate item)

1 = 6 V

MJPG1 = Wire Guard

MJ4 = Chicago

Steel Unit

Note

1) Unit has provisions for one meter option only.

Unit Battery Capacity

UNIT	DC VOLTAGE	LAMP WATTAGE	BATTERY WATTS TO 87 1/2 OF RATED VOLTAGE*				
	VOLIAGE	WAITAGE	1 1/2 HRS	2 HRS	4 HRS	8 HRS	
MJ4	6	26	26	20	15	12	

^{*} Per NEC specifications.



Philips Lightolier

e: lol.webmaster@philips.com

t: (508) 679-8131

w: www.lightolier.com

MJ4 Series September 19, 2011

Specifications are subject to change without notice.

© Koninklijke Philips Electronics N.V., 2011. All rights reserved.

Job Information Type: