

QVF2SPFOS

2' x 4'

ALTER SLIM SURFACE


2' X 4' SURFACE FLUORESCENT

2-T5, 3-T5 OR 4-TT5, 2 1/4" DEEP

MICROPERFORATED MESH LAMP SHIELD

STATIC


- Efficiency 51.0%.
- Only 2 1/4" deep.
- Swing down microperforated lamp shields for easy relamping and maintenance.
- Alter soft white film on inside of mesh conceals lamp image and provide balance between reflected light and direct light.
- 95% Reflective Alter soft white paint finish.
- One piece body for easy installation.
- Easy access to ballast through lamp compartment.
- Optional acrylic drop-down visual element.

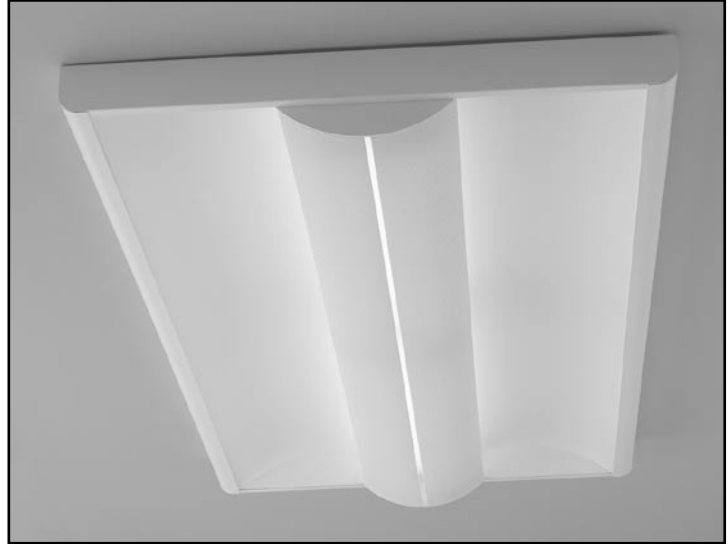



MOUNTING METHODS/FEATURES

DIMENSIONS

Swing down optical system for easy relamping and maintenance



Microperforated mesh lamp shields

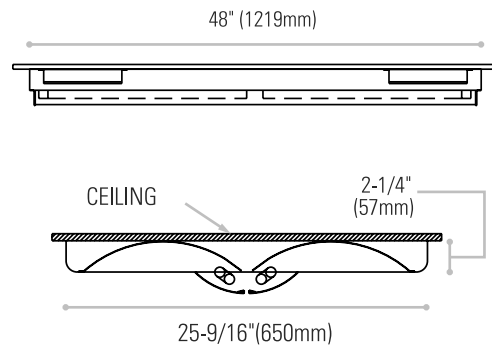

FIXTURE TYPE	VOLTS
JOB INFORMATION: _____	

QVF2SPFOS

ALTER SLIM SURFACE 2' X 4' SURFACE FLUORESCENT

Photometry


Model No. : QVF2GPFO4FT120SB

CERTIFIED TEST REPORT NO. LSC8232
COMPUTED BY LSC PROGRAM **TEST-LITE**

ALTER SLIM SEMI-RECESSED 2x4 DIRECT/INDIRECT FIX. CAT. NO. QVH2GPFO4J4120SB
WITH WHITE PAINTED INTERIOR, PERFORATED LAMP SHIELDS WITH TRANSLUCENT LENSES
FOUR 40W PL-L COMPACT FLUORESCENT LAMPS. LUMEN RATING = 3150 LMS.
TWO MAGNETEK TRIAD 120V 1 OR 2-LAMP ELECTRONIC BALLASTS NO. C2401120RH

LIGHTING SCIENCES CANADA LTD.
440 PHILLIP ST. UNIT 19
WATERLOO, ONTARIO CANADA N2L 5R9

CERTIFIED TEST REPORT NO. LSC8232
COMPUTED BY LSC PROGRAM **TEST-LITE**

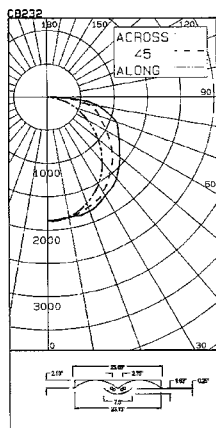

CANDLEPOWER SUMMARY				OUTPUT LUMENS	
ANGLE	ALONG	45	67.5	ACROSS	
0	1854	1854	1854	1854	1854
5	1859	1847	1851	1848	179
10	1827	1823	1834	1839	1840
15	1776	1775	1808	1833	510
20	1707	1719	1766	1827	1829
25	1615	1646	1725	1766	787
30	1525	1568	1651	1699	1718
35	1405	1467	1569	1632	1671
40	1266	1367	1456	1566	1601
45	1133	1243	1373	1464	1507
50	984	1103	1257	1367	1409
55	839	953	1134	1257	1308
60	691	825	1014	1163	1233
65	560	703	909	1098	1165
70	436	568	827	1023	1095
75	301	487	744	891	940
80	176	386	605	730	783
85	70	244	395	473	517
90	6	34	38	53	61

ZONAL LUMENS AND PERCENTAGES

ZONE	LUMENS	% LAMP	% LUMINAIRE
0-30	1475	11.71	22.94
0-40	2444	19.40	38.00
0-60	4473	35.50	69.55
0-90	6431	51.04	100.00
40-90	3987	31.64	62.00
60-90	1958	15.54	30.45
90-180	6	0.00	0.00
0-180	6431	51.04	100.00

** EFFICIENCY = 51.0% **

LUMINANCE SUMMARY-CD. / SQ. M.

S/MH = 1.4

SC(ALONG) = 1.2, SC(ACROSS) = 1.4

ANGLE	ALONG	45	ACROSS
45	2277	2640	2842
55	2080	2634	2958
65	1884	2774	3420
75	1655	3451	4105
85	1145	4122	4695

CERTIFIED BY:

DATE: MAY 12, 2000

PREPARED FOR:
CANADIAN FLUORESCENT INDUSTRIES
CORNWALL, ONTARIO

TESTED ACCORDING TO IES PROCEDURES. TEST DISTANCE EXCEEDS FIVE TIMES THE GREATEST LUMINOUS OPENING OF LUMINAIRE.

ALTER SLIM SEMI-RECESSED 2x4 DIRECT/INDIRECT FIX. CAT. NO. QVH2GPFO4J4120SB
WITH WHITE PAINTED INTERIOR, PERFORATED LAMP SHIELDS WITH TRANSLUCENT LENSES
FOUR 40W PL-L COMPACT FLUORESCENT LAMPS. LUMEN RATING = 3150 LMS.
TWO MAGNETEK TRIAD 120V 1 OR 2-LAMP ELECTRONIC BALLASTS NO. C2401120RH

COEFFICIENTS OF UTILIZATION

ZONAL CAVITY METHOD

EFFECTIVE FLOOR CAVITY REFLECTANCE = .20

CC WALL	80	70	50	30	10	0
70	50	30	10	70	50	30
30	10	70	50	30	10	70
10	70	50	30	10	70	50
0	70	50	30	10	70	50
RCR	0	.61	.61	.61	.61	.59
	.59	.59	.59	.59	.57	.57
	.57	.57	.57	.54	.54	.54
	.54	.54	.54	.52	.52	.52
	.52	.52	.52	.51	.51	.51
1	.55	.52	.49	.47	.53	.51
	.49	.46	.49	.47	.45	.44
	.44	.43	.44	.45	.44	.44
	.43	.42	.43	.41	.38	.36
	.36	.39	.37	.41	.38	.39
	.37	.35	.34	.36	.33	.33
3	.45	.39	.35	.31	.44	.38
	.34	.31	.37	.33	.30	.35
	.32	.30	.35	.32	.30	.34
	.29	.28	.29	.26	.26	.31
	.28	.25	.22	.28	.25	.22
	.22	.24	.22	.27	.24	.22
5	.38	.31	.26	.23	.37	.30
	.26	.23	.29	.25	.22	.28
	.22	.19	.25	.22	.19	.25
	.21	.19	.25	.22	.19	.25
	.18	.16	.22	.19	.16	.15
7	.32	.25	.20	.17	.31	.24
	.20	.17	.31	.24	.20	.17
	.17	.24	.19	.17	.23	.19
	.16	.22	.19	.16	.22	.19
	.16	.22	.19	.16	.22	.19
8	.30	.22	.18	.15	.29	.22
	.15	.29	.22	.18	.15	.21
	.15	.21	.17	.15	.21	.17
	.15	.20	.17	.15	.20	.17
	.14	.20	.16	.13	.27	.20
	.13	.27	.20	.16	.13	.19
	.13	.19	.16	.13	.19	.15
	.13	.18	.15	.13	.18	.15
	.13	.18	.15	.13	.18	.15
9	.27	.20	.16	.13	.27	.20
	.13	.27	.20	.16	.13	.19
	.13	.19	.16	.13	.19	.15
	.13	.18	.15	.13	.18	.15
	.13	.18	.15	.13	.18	.15
10	.25	.19	.14	.12	.25	.18
	.14	.25	.18	.14	.11	.18
	.14	.21	.17	.15	.21	.17
	.14	.20	.16	.13	.27	.20
	.13	.27	.20	.16	.13	.19
	.13	.19	.16	.13	.19	.15
	.13	.18	.15	.13	.18	.15
	.13	.18	.15	.13	.18	.15

DETERMINED IN ACCORDANCE WITH CURRENT IES PUBLISHED PROCEDURES
LUMINAIRE INPUT WATTS = 129.8
LABORATORY RESULT MAY NOT BE REPRESENTATIVE OF FIELD PERFORMANCE.
BALLAST FACTORS HAVE NOT BEEN APPLIED.

ORDERING INFORMATION Explanation of Catalogue Number Example: QVF2SPFOS4FT120SB

QVF	2	S	PF	OS	4	FT	120	SB	
ALTER SLIM SURFACE Surface soft light optical system	FIXTURE WIDTH 2'	CEILING TYPE S=Surface	LAMP SHIELD PF = Microperforated	SHIELD DETAILING OS = Open slot (no acrylic) GC = Clear acrylic GG = Clear acrylic / Green projected color face GB = Clear acrylic / Blue projected color face GR = Clear acrylic / Red projected color face	LAMP QUANTITY 2 3 (T5 only) 4 (T5 only)	LAMP/FIXTURE LENGTH (NOMINAL 24") 28 = 28W T5 54 = 54W T5 FL = 2 x T5 FT = T5	VOLTAGE 120, 277 347, UNV(120/277V)	BALLAST SB: 40W T5 Elect. BE: 50W T5 Elect. BD: 55W T5 Elect. PB: 40W T5 PowerSpec HDF Dimming † PI: T5 Elect. Instant S. PG: T5 Elect. Program S. DA: iGEN DALI †	OPTIONS R = Radio Interface Filter O = Emergency Lighting System (for Canada) N = Emergency Lighting System (for U.S.)

† Not available in 347V.

SPECIFICATIONS

MATERIALS: One piece chassis constructed from die formed 20 gauge cold rolled steel. **Reflectors** - 95% reflectance baked white acrylic matte paint finish. Soft white acrylic film on inside of lamp shield conceals lamp image.

FINISH: Chassis exterior - phosphate undercoating, baked white acrylic matte high reflectance paint finish.

ELECTRICAL: Rapid start HPF, thermally protected class "P" ballast (Bi-tube type). If K.O.s are within 3" of ballast use wire suitable for at least 90C.

LABELS: Listed by CSA, UL

We reserve the right to change, materials and finish in any way that will not alter installed appearance or reduce function and performance.

631 Airport Road, Fall River, MA 02720 - Tel. (508) 679-8131
C.F.I. Division of Canlyte, Inc.
525 Education Road, Cornwall, Ontario
Canada K6H 6C7 - (613) 938-6221

Genlyte Thomas Company