
## Radiante Normally On Series

### ARCHITECTURAL LED EMERGENCY LIGHTING

Page 1 of 2

#### **RDNON**





#### **Features**

Illumination: Illumination is provided by two 3 W, white LEDs and a specular Miro 4 (Alanod™) aluminum reflector. The lamp head assembly may be rotated in five degree increments over a range of 60 degrees for ideal distribution along the egress path. Radiante Normally On will provide one footcandle average illumination over a 12' long path of egress for a single fixture and 26' centers for multiple fixtures.

Housing: Robust die cast and extruded aluminum housing. A full range of pleasing architecturally inspired finishes are available (see back). Wall mount to standard 3 1/2" octagonal junction box.

### Operating Temperature Range:

-22°F (-30°C) to 104°F (40°C)

**Electronics:** 120/277 VAC dual voltage input.

## **Electrical Specifications:** 0.10 A, 11.73 W (120 VAC) 0.04 A, 11.61 W (277 VAC)

#### **Code Compliance**

UL 924 and UL damp location listed. NFPA 101, NEC, BOCA, OSHA and IBC illumination standards.

#### **Warranty**

Three year full electronics warranty.

Job Information	Туре:
Job Name:	
Cat. No.:	
Notes:	



# Radiante Normally On Series

### Architectural LED Emergency Lighting

Page 2 of 2

#### **Ordering Information**

**RDNO** 

Series

RDNO = Radiante Normally On Architectural LED Luminaire

Housing Color

W = White

B = Black

A = Aluminum

**G** = Gunmetal

BR = Ornamental Bronze

AC = Aged Copper

VG = Velvet Green

N = Nickel

Consult factory for other


colors.

Factory Installed Options

TP = Tamperproof

Accessories (order as a separate item) T10TPTOOL = Tamperproof Tool with Bit

#### **Optics**

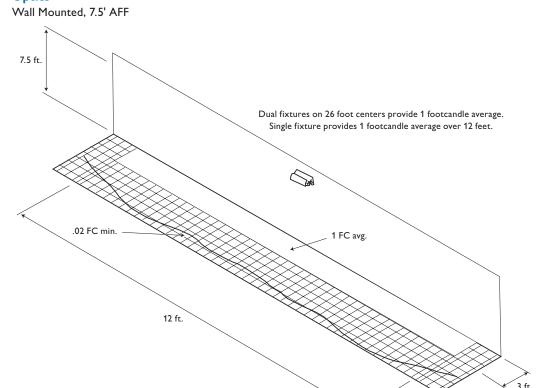

Input Voltage Options

Emergency

Blank = 120/277 VAC No

2CKT1 = 120/120 2 Circuit **2CKT2** = 277/277 2 Circuit

<sup>\*</sup> The optics layout shown is intended to be used as reference only. Standard reflectances used were 80/50/20. Lightolier is not responsible for site specific conditions that may alter the results.



Philips Lightolier

e: lol.webmaster@philips.com

t: (508) 679-8131

w: www.lightolier.com

Radiante Normally On Series August 8, 2011

Specifications are subject to change without notice.

© Koninklijke Philips Electronics N.V., 2011. All rights reserved.

Job Information

Type: