
LIGHTOLIER

by (s) ignify

Downlighting

Calculite CFL 6"

S6132BU Triple Tube Frame-In Kit

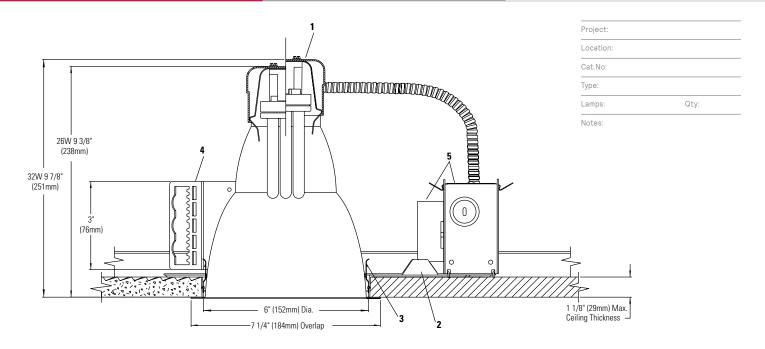

Ceiling cutout: 6 9/16" (167 mm) Dia. (Shown with 8021 trim kit)

Frame-in kit		Compatible reflector trims			
S6132BU	Electronic 120V-277V	Downlights		Wall washers	
	26 or 32W triple tube	8021	Open, vertical lamping	8021WW	Open, vertical lamping
	4-Pin (Amalgam)	8031	Open, horizontal lamping	8081	Open, horizontal lamping
		8091CB	Louvered, horizontal lamping	8046	Lensed, horizontal lamping

Features

- 1. Socket cup: Snaps onto reflector neck to assure consistently correct optical alignment without tools.
- 2. Mounting frame: Galvanized stamped steel for dry or plaster ceilings.
- 3. Retaining springs: Precision-tooled steel friction springs secure reflector to mounting frame for quick, tool-less installation.
- 4. Mounting brackets: Galvanized steel. Adjust from inside of fixture. Use 3/4" or 1 1/2" lathing channel, 1/2" EMT, or optional mounting bars.
- 5. Ballast/J-Box: Electronic 120V 277V. UL listed for through branch circuit wiring with max of (8) No. 12 AWG, 90°C supply conductors. Outboard mounted to reduce heat transfer and maintain lamp efficacy and life. Service from below without tools.

Note: For ballast electrical data and latest lamp/ballast compatibility refer to "Ballast" specification sheet for complete electrical data.

Options & Accessories

Standard dimming options

S6132B

CU3 Lightolier PowerSpec 3% Dimming (120/277V)

JULECD Lutron EcoSystem 5% Dimming (120/277V) JUM7 Mark 7 Dimming (120/277V) J1MX Mark 10 Dimming (120V)

Mark 10 Dimming (277V) Other dimming product available, please consult factory

Mounting bars: 1950 - 18" Set of (2)

1951 - 27" Set of (2)

T-Bar anchor clips: 1956 - Set of (4), for use with above

Labels

J2MX

UL listed for damp locations. 8091F, 8091C, 8091P, UL listed for wet locations. NS6132BU available for I.B.E.W.

