

Standard Strip Wide **SW STRIP**

Page 1 of 2







4-1/8" Wide X 1-7/8" Deep X 24", 36", 48", 72" or 96" Lengths
1 or 2 Lamp, T8 or T12

Features

- Fixtures suitable for individual, row, surface, or suspension mounting.
- Efficiency 97.3% (T8).
- Quarter turn latch secures channel cover for easy wireway access.
- Heavy duty channel of code gauge die formed steel.
- Fully enclosed wiring.
- U.L. Listed snap-on end caps.
- Combination end cap for continuous row mounting.
- Green grounding screw installed in channel.
- Lampholders may be individually replaced or rewired.
- UL listed for direct mounting on low density ceilings and damp locations.



Dimensions

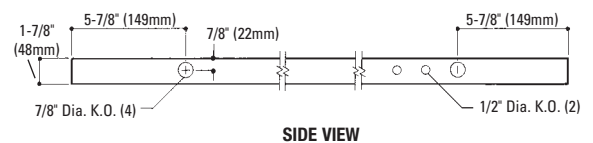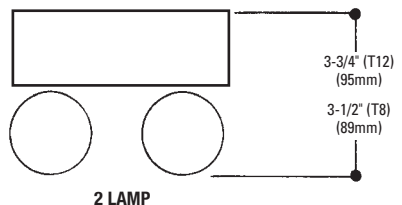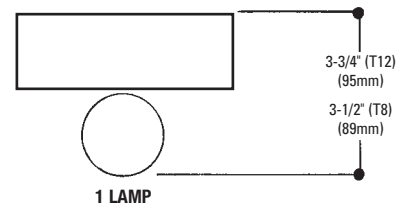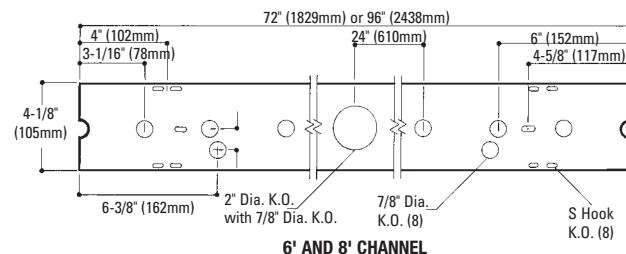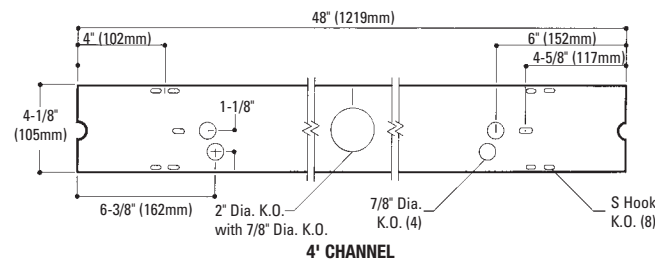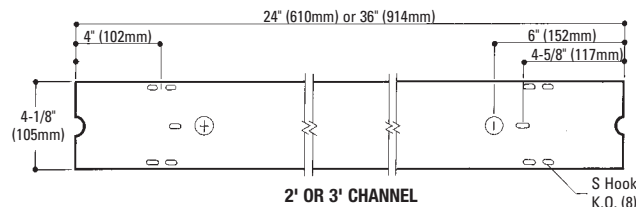

Job Information Type:

Job Name:

Cat. No.:

Lamp(s):

Volts/Ballast:


Standard Strip Wide SW STRIP

Page 2 of 2

4-1/8" Wide X 1-7/8" Deep X 24", 36", 48", 72" or 96" Lengths
1 or 2 Lamp, T8 or T12

PHOTOMETRY

REPORT NO: G17009
CATALOG NO:
SW4S232HPF120SO
LAMP TYPE: F32 / T8
LUMENS PER LAMP: 2900
TOTAL EFFICIENCY: 97.3%
CIE TYPE: SEMI-DIRECT
SPACING CRITERIA: 1.58
SHIELDING ANGLE: 180



LER = FS - 80.5 Watts - 60.3 BF - 0.88
Comparative yearly lighting energy cost per 1000 lumens = \$2.98

coefficients of utilization — zonal cavity method (effective floor cavity reflectance 0.20)									
RF	20			50			30		
RC	80			80			30		
RW	70	50	30	50	30	10	50	30	10
1	99	93	88	81	77	74	74	71	68
2	88	79	72	69	63	58	63	58	54
3	80	68	60	59	53	47	54	49	44
4	72	60	51	52	45	39	47	42	37
5	66	53	44	46	39	33	42	36	31
6	61	47	38	41	34	29	38	32	27
7	56	43	34	37	30	25	34	28	24
8	52	39	30	34	27	22	31	25	21
9	49	35	27	31	24	20	29	23	19
10	45	32	24	29	22	18	27	21	17

Ordering Information

Explanation of Catalog Number. Example: SW4S232HPFUNVHI

SW								
STANDARD STRIP WIDE: 4-1/8" Wide Channel	FIXTURE LENGTH: 2=24" 3=36" 4=48" 6=72" 8=96"	LAMP CONFIGURATION: S=Standard T=3' or 4' Lamps in Tandem (For 6' or 8' units)	NUMBER OF LAMPS IN WIDTH: (By Others) 1=1 Lamp 2=2 Lamp	LAMP WATTS: 17=T8, 2' Length 20=T12, 2' Length 25=T8, 3' Length 30=T12, 3' Length 32=T8, 4' Length 34=T12, 4' Length	BALLAST TYPE: LPF=Low Power Factor. For T12 Only HPF=High Power Factor	VOLTAGE: 120, 277 or UNV UNV T8 ONLY	BALLAST TYPE: Standard Electromagnetic LPF Models T12 1-1 & 1-2 Lamp Elec. T8 1-4 Lamp Elec. T8 *Instant Start Standard Other dimming options. Consult factory. On 2 Light Tandem 6' and 8' fixtures, 2-2 light ballasts will be used with SO or HI.	OPTIONS: Add appropriate suffix to catalog no., ie: (A)

Options/Accessories

FUSING: Internal fast blow fusing: SUFFIX: **A**
Internal slow blow fusing: SUFFIX: **C**
ELECTRICAL WIRING OPTIONS: Consult factory.
STEM AND CANOPY SETS: Suspends fixture 6", 12", 18" or 24" from surface. Order Catalog Number: **ASC6 CSP** (6"), **ASC12 CSP** (12"), **ASC18 CSP** (18"), **ASC24 CSP** (24").
CANOPY SPACER: Suspends fixture 1-1/2" from surface. Order Catalog Number: **AC1 CSP**.

GROUNDING CONVENIENCE OUTLET: 120 volt only. SUFFIX: **CO**.
4' WIRE GUARD (WHITE): Specify two for 96" fixtures. Catalog Number: **AWG3W CSP**.
CHAIN HANGING KIT: Includes two 5' heavy duty link chains with sturdy "V" hooks for fixture suspension. Catalog Number: **AH5 CSP**.
TWIST TEE: For exposed T-bar mounting, 1-7/8" deep channel. Catalog Number: **NAH3 CSP**.
HEAVY DUTY COUPLER: Catalog Number: **NHDC-W CSP**.
SLIDING HANGER: Catalog Number: **NAHW CSP**.

REFLECTORS:
SYMMETRICAL:
ASYMMETRICAL:
Order Catalog Number:
NSYMF24S CSP (24")
NSYMF36S CSP (36")
NSYMF48S CSP (48")
NASYF24S CSP (24")
NASYF36S CSP (36")
NASYF48S CSP (48")




STEM AND CANOPY SET
ASC6 CSP (6")




CANOPY SPACER
AC1 CSP




CHAIN HANGING KIT
AH5 CSP




HEAVY DUTY COUPLER
NHDC-W CSP




TWIST TEE
NAH3 CSP



SLIDING HANGER
NAHW CSP



SYMMETRICAL



ASYMMETRICAL

Specifications

MATERIALS: Chassis parts—are die-formed heavy gauge cold rolled steel, 4-1/8" channel width.

BALLAST COVER: Code gauge steel secured with quarter turn latch.

FINISH: Chassis exterior-phosphate undercoating, baked white polyester enamel.

ELECTRICAL: Thermally protected class "P" ballast C.B.M. approved, non-PCB. If K.O. is within 3" of ballast, use wire suitable for at least 90°.

LABELS: I.B.E.W./UL and UL Listed.

This product may have a mercury containing lamp.

Manage in accord with Disposal Laws. See: www.lamprecycle.org

Job Information

Type: