



## Solid Front Under Shelf Fluorescent Luminaire 24", 36", 48" Length, 1 Lamp T8

### Features

- 1 3/4" shallow depth.
- Three nominal lengths: 24", 36" and 48"
- Specification grade under shelf luminaire.
- Solid front design.
- Lens removable without tools for easy maintenance.
- 100% acrylic linear prismatic lens to obscure lamp image and uniformly distribute light output
- Lamp T8, CRI=70, color temp 3500K , is standard and included.
- Paint after fabrication with white polyester paint finish.
- All electrical components mounted on an easily removable service tray.
- On/off rocker switch (included in supply pack) 120 volt use only.
- Universal voltage.

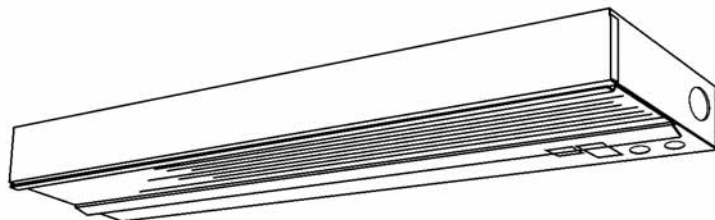


### Features

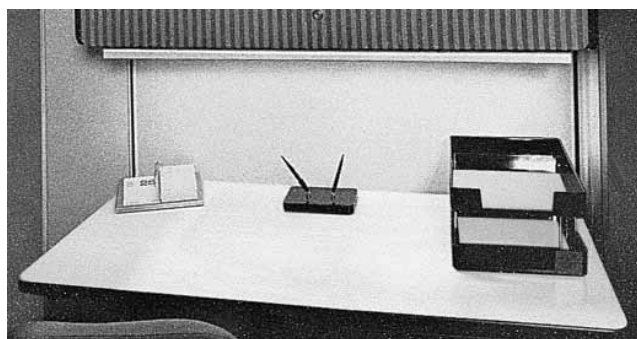

Attractive, unobtrusive lighting

### Dimensions

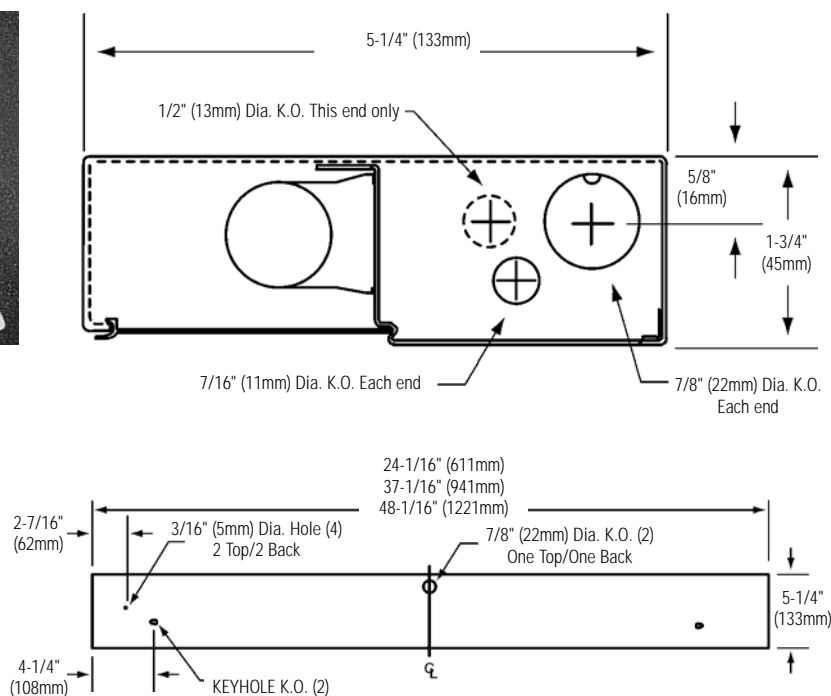

### Job Information

### Type:

**Job Name:**

**Cat. No.:**

**Lamp(s):**

**Volts/Ballast:**

For Factory Technical Information: (978) 657-7600 • Fax (978) 658-0595  
631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710  
We reserve the right to change details of design, materials and finish.  
www.lightolier.com © 2008 a Philips Group

07/08

Section 3A/Folio H160-10

### PHOTOMETRIC DATA

Fixture Efficiency: 68.1%

Catalog Number: TCF132WUNVHI BPR

Test Number: 17849

Lamps: F32T8

Ballast: Electronic

Input Watts: 29


Ballast Factor: 0.85

### LUMEN SUMMARY

ZONE	LUMENS	% LAMP	% FIXT
0- 30	361	12.5	18.3
0- 40	605	20.9	30.6
0- 60	1129	38.9	57.1
0- 90	1634	56.4	82.7
90-180	341	11.8	17.3
0-180	1976	68.1	100.0

### INITIAL FOOTCANDLES: 4FT-T8 with Solid Front

	A	B	C	D	E
1	113	212	242	210	109
2	82	153	173	154	82
3	38	65	76	69	37
4	16	24	27	24	15

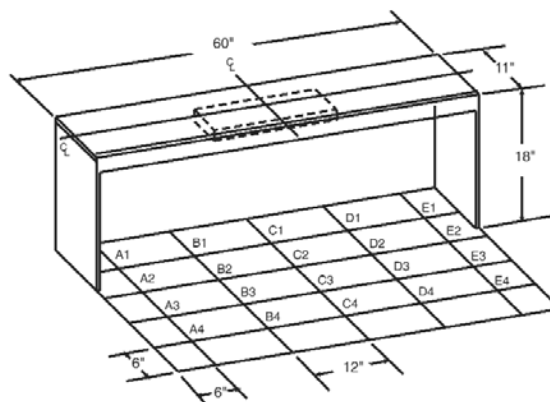

### Ordering Information

Explanation of Catalog Number. Example: TCF132WUNVHI BPR

**TCF**

Taskmaster  
Solid Front T8:  
Task Lighting

**1**

Lamp Quantity:  
(735K Installed)  
1=1 Lamp

Lamp/Fixture  
Length/Watts:  
17 = 17W T8 (Nominal 24")  
25 = 25W T8 (Nominal 36")  
32 = 32W T8 (Nominal 48")

**W**

Finish:  
W = White

**UNV**

Voltage:  
UNV=120-277

Ballast:  
HI = Instant Start <10 THD T8  
RO = Rapid Start <10 THD T8

**BPR**

Bulk Pack Rocker Switch:  
Rocker switch is provided uninstalled in a supply pack within fixture carton. *Rocker switch should only be installed in task light when using 120 volt power supply.*

### Specifications

**Materials:** Chassis parts are die-formed code gauge steel.

**Lamp Shield:** 100% acrylic lens.

**Finish:** All metal parts painted after fabrication with white polyester paint finish.

**Electrical:** Electronic ballast is standard. T8 triphosphor (735) lamp is supplied as standard.

**Labels:** I.B.E.W./UL and ULc Listed.

This product may have a mercury containing lamp. Manage in accord with Disposal Laws.

See: [www.lamprecycle.org](http://www.lamprecycle.org)

### Options/Accessories

**Electrical Wiring Options:**

- GLR-B (6 pack of 3 amp fusing)
- RIF-SUPR (1-RFI suppressor)
- CONV OUTLET (10 PACK)

Accessories will ship as an additional line item when ordered for field installation

### Job Information

### Type:

For Factory Technical Information: (978) 657-7600 • Fax (978) 658-0595  
631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710  
We reserve the right to change details of design, materials and finish.  
[www.lightolier.com](http://www.lightolier.com) © 2008 a Philips Group

Section 3A/Folio H160-10