

GER

COMPACT FLUORESCENT - OPAQUE PENDANT

OPAQUE

Application Concept...General and task lighting that offers a unique solution to lower glare without compromising visual comfort. Intended for use in hospitality, corporate and retail environments that require more than the usual aesthetics and performance.

Finish

Metalized finishes or painted.

Reflectors

Precision crafted and anodized .050 aluminum.

Mounting

Surface - Accommodates standard 3.5" or 4" octagonal junction box
Recessed - Precision stamped 16 gauge galvanized steel.
Accommodates ceilings up to 1-3/8" thick.

UL Listed

UL Listed Damp Location. IBEW union made.



aperture REQUIRED	lamp REQUIRED	fixture finish REQUIRED	interior reflector finish REQUIRED	exterior reflector finish OPTIONAL	suspension method REQUIRED	decorative element REQUIRED	electrical options OPTIONAL	voltage REQUIRED
GER10	57PLT 42PLT 32PLT 26PLT 18PLT Socket Type CFM57W/GX24q-5 CFM42W/GX24q CFM32W/GX24q CFM26W/GX24q CFM18W/GX24q	GR graphite PW pewter TI titanium CO copper PC patina copper BR bronze RU iron oxide BQ baroque BK black (paint) WH white (paint) AL aluminum (paint) finish applied to all exterior metal parts. for custom RAL colors consult factory	CS clear specular CSS clear semi-specular HZ haze	A anodized anodized option leaves the exterior of reflector as an anodized finish matching the interior finish specified, creating greater contrast between fixture components	C cord black standard white cord supplied with white fixtures standard length is 120" and can be field modified A aircraft cable black coiled cord, stainless cable - white cord is supplied with white fixtures standard length is 120" of pre-coiled cord and yields an effective suspension length of 12" to 48" S stem stem finish to match fixture standard length is 24" —for other requirements consult factory	FXB flat cross baffle FLD floating luminous disk FLR floating luminous ring T flange trim T option can be ordered with the FXB, FLD, FLR. example: FXBT	F1 fuse 120 F2 fuse 277 F3 fuse 347 EM emergency-remote battery may be installed a maximum of 48" from fixture. consult factory for specific design solutions. consult factory for other ballast option	U 120-277V CFL electronic ballast 3 347V CFL DL1 Dimming, Lutron Compact SE, 120v DL2 Dimming, Lutron Compact SE, 277v DX1 Dimming, Advance Mark X, 120v DX2 Dimming, Advance Mark X, 277v dimming is Lutron Compact SE 5% standard.

Omega Lighting 5 Year Limited Warranty
U.L. and C.U.L. listed damp location. For Wet Location and Wet Location Covered Ceiling, consult factory.
IBEW union made.
Due to the natural aging process of Origins Rust, Patina Copper, and Baroque metalized finishes, variations may exist between fixtures.



CAT NO.: _____
TYPE: _____
PROJECT: _____

ORI-7.1

8/08

OMEGA LIGHTING: 776 South Green St., Tupelo, MS 38804 Phone 662.842.7212 FAX 662.841.5501

Omega Lighting is a Philips group brand

PHILIPS

GER


COMPACT FLUORESCENT - OPAQUE PENDANT



photometric data

— 0° (parallel)
- - - 90° (normal)


Additional photometric test files are available at www.originslighting.com



CANDIEA			
DEGREES	AT 0°	AT 90°	FOOT- LAMBERTS
90	0	0	
85	1	1	66
75	2	3	56
65	6	6	82
55	18	19	186
45	259	262	2122
35	769	736	
25	1078	982	
15	1231	1119	
5	1233	1258	
0	1225	1225	

1032PLT-CS

Report number: 25483
Lamp: CFT32W
Total Lumens: 2400
Fixture Efficiency: 69.2%
S/MH: 1.2, 1.1
IES file: F25483.IES
Beam Angle: 79.48




CANDIEA			
DEGREES	AT 0°	AT 90°	FOOT- LAMBERTS
90	1	1	
85	2	2	132
75	8	8	178
65	61	63	845
55	478	479	4805
45	755	739	6085
35	1099	1076	
25	1295	1297	
15	1421	1430	
5	1550	1493	
0	1481	1481	


1057PLT-CS

Report number: 25496
Lamp: CFT57W
Total Lumens: 4300
Fixture Efficiency: 67.2%
S/MH Ratio: 1.2, 1.2
IES file: F25496.IES
Beam Angle: 89.95

dimensions

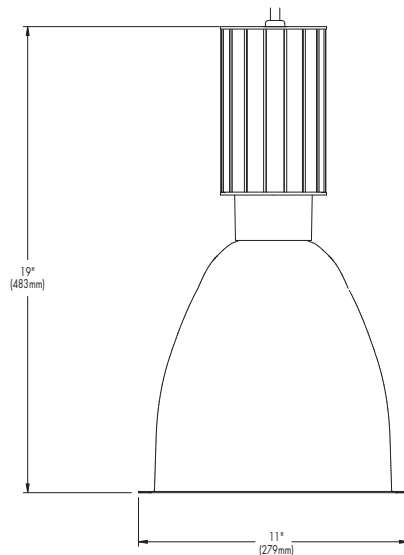

canopy mount dimensions

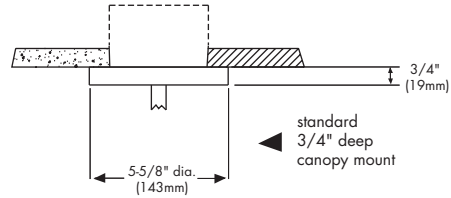

omega
LIGHTING

OR1-7.1

776 SOUTH GREEN ST., TUPELO, MS 38804 · PHONE 662.842.7212 · FAX 662.841.5501 · WWW.OMEGALIGHTING.COM
CANADIAN DIVISION: 189 BULLOCK DRIVE, MARKHAM, ONTARIO, CANADA L3P 1W4 · PHONE 905.294.9570 · FAX 800.268.0003
WWW.ORIGINSLIGHTING.COM 8/08