



BASwall

INCANDESCENT

BAS General Characteristics...The housings are made of machined cast AL designed to dissipate socket heat. Lamp shrouds are spun AL that accept a variety of accessories for precision applications. Surface mounted housings are spun AL. Fixtures are assembled with no visible fasteners.

Pendant Application Concept...For use in interior space as suspended general, accent or task lighting applications that require a balance of good lamp and lamp image cut off and fixture efficiency. Can be used in office, hospitality, retail or corporate spaces that require quality lighting and an architectural statement.



aperture REQUIRED	lamp REQUIRED	fixture finish REQUIRED	accessory options OPTIONAL
BASW	250P38 75P30LN 75P30 50P20	GR graphite PW pewter TI titanium CO copper PC patina copper BR bronze RU iron oxide BQ baroque BK black paint WH white paint AL aluminum paint	color filters, spread lenses, and louvers are available for BAS wall sconces
		fixture finish is applied to all exterior parts for custom or RAL colors consult factory	

mesh wire guard

The mesh wire guard is required for use in all BAS wall sconces when installed aimed up. The guard minimizes the possibility that debris will fall into the fixture and block the lamp or cause an unsafe condition.

Order as a separate line item:
P20WG - BAS par20 mesh wire guard
P30WG - BAS par 30 mesh wire guard
P38WG - BAS par 38 mesh wire guard

Omega Lighting 5 Year Limited Warranty
U.L. and C.U.L. listed damp location.
For Wet Location and Wet Location
Covered Ceiling, consult factory.
IBEW union made.

Due to the natural aging process of Origins Rust, Patina Copper, and Baroque metalized finishes, variations may exist between fixtures.



OMEGA LIGHTING: 776 South Green St., Tupelo, MS 38804 Phone 662.842.7212 FAX 662.841.5501

Omega Lighting is a Philips group brand

CAT NO.: _____
TYPE: _____
PROJECT: _____

OR2-8
8/08

PHILIPS

BASwall

INCANDESCENT






Additional photometric test files are available at www.originslighting.com

50W PAR20/FL 0° aiming angle			
D	FC	L	W
4'	116	1.9'	1.9'
6'	51	2.9'	2.9'
8'	29	3.8'	3.8'
10'	19	4.8'	4.8'

75W PAR30/FL 0° aiming angle			
D	FC	L	W
4'	125	2.9'	2.9'
6'	56	4.4'	4.4'
8'	31	5.8'	5.8'
10'	20	7.3'	7.3'

250W PAR38/FL 0° aiming angle			
D	FC	L	W
7'	163	4.0'	4.0'
10'	80	5.7'	5.7'
13'	47	7.5'	7.5'
16'	31	9.2'	9.2'

dimensions

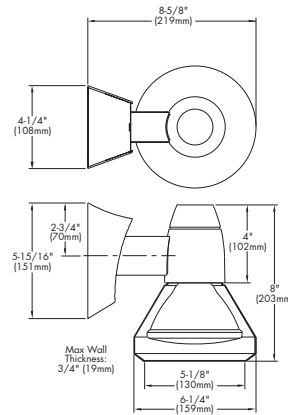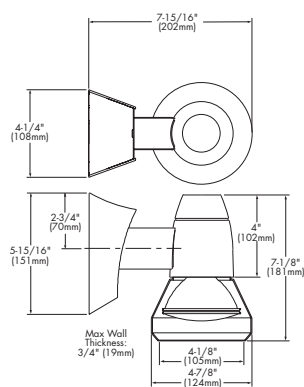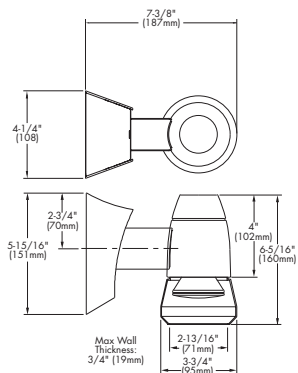

OMEGA
LIGHTING



OR2-8

776 SOUTH GREEN ST., TUPELO, MS 38804 · PHONE 662.842.7212 · FAX 662.841.5501 · WWW.OMEGALIGHTING.COM
CANADIAN DIVISION: 189 BULLOCK DRIVE, MARKHAM, ONTARIO, CANADA L3P 1W4 · PHONE 905.294.9570 · FAX 800.268.0003
WWW.ORIGINSLIGHTING.COM 8/08