

LIGHTOLIER® CONTROLS

DESIGNER-STYLE REMOTE CONTROL
DEVELOPED TO BE USED WITH COMPLI® SYSTEMS
AND OTHER SIMILAR ELECTRICAL DEVICES

Project:


Location/Type:

Description

Compli Scenist II Remote Stations provide preset scene selection and raise/lower channel intensity control from any number of locations. Each device is field-configurable, permitting functions to be changed without the use of programming terminals. The unit's thin profile matches the designer styling of Compli systems and other devices with similar electrical wiring.

Features

- Streamlined appearance and operations.
- Available in two- or five-function configurations.
- Easy to install; mounts in a standard single-gang electrical box.
- Illuminated scene-select push buttons.
- Elegant, designer-style Compli screwless faceplate.
- Raise/lower remotes are field-programmable, permitting the control of one or more channels on one or more masters.
- Raise/lower channels and scene-select push buttons may be field-labelled for easy identification.
- Compli Scenist II Remotes may be mounted under Compli multi-gang faceplates with other designer-style electrical devices.

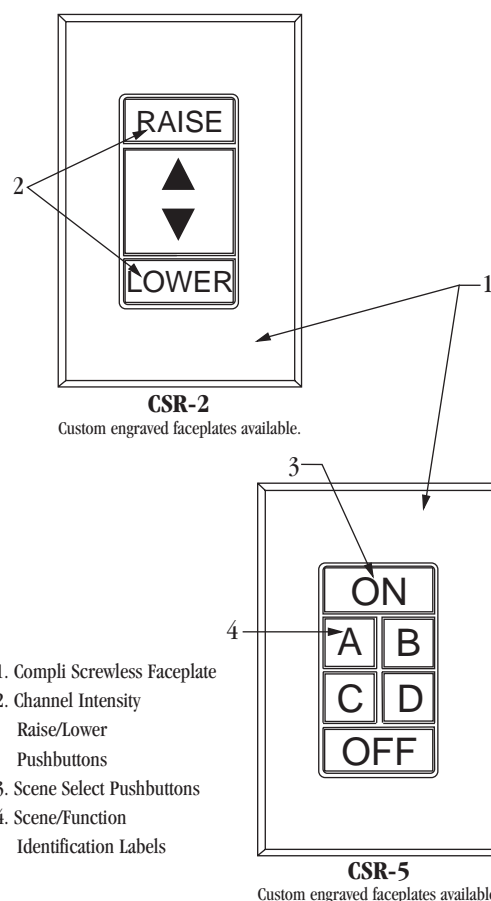

Model Number	Number of Raise/Lower	Number of Scenes
CSR-5	--	5 Plus "OFF"
CSR-2	1	1 Plus "OFF"

COMPLI[®] SCENIST II REMOTE

Product
Specifications

Specifications

Each Compli Scenist II Remote Station consists of a set of push buttons which may be used for preset scene selection or channel intensity raise/lower control. Each remote is flush-mounted into a standard, single-gang box (not provided). All wiring is made by means of #18-22 AWG, 300V insulation.

The Compli Scenist II Remote's illuminated push buttons are field-labelled and modified with graphics. There are no moving or protruding parts available to the end-user once the remote is installed.

Electrical Specifications:


Input-LED Power:	Five volts at 10 ma per LED
Switch Power:	None
Output:	50 ma per momentary switch closure
Storage Temperature:	-25° C to +85° C
Operating Temperature:	0° to 40° C

Finishes:

Standard:	White faceplate with smoke-tinted buttons
Options*:	Black
	Ivory
	Grey
	Polished Brass
	Polished Aluminum


* Optional finishes are available at an additional cost. All optional finishes are equipped with white trim white labels and clean push buttons.

Dimensions

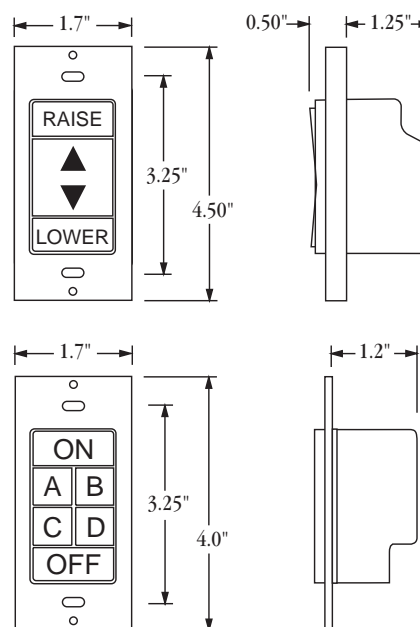

Note: Shown without COMPLI Faceplate (provided)
Compli Faceplate: 2.75" x 4.5" O.A.

Wiring Diagram

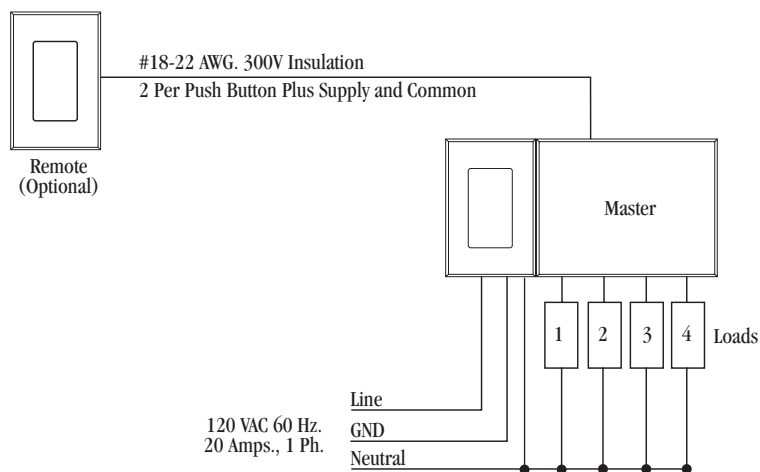

We reserve the right to change details of design, materials and finish in any way that will not alter the installed appearance or reduce function performance.

Lightolier Controls

A Genlyte Company

10911 Petal Street • Dallas, Texas 75238

For technical/sales assistance, call: 1-800-526-2731

Made in U.S.A. ©Lightolier Controls 2005

www.lolcontrols.com P/N 87-0191A