



DESIGNER STYLE CONTROL STATION FOR USE WITH LYESWITCH RELAY PANELS AND INTELLISIGHT OCCUPANCY SENSING SYSTEMS

Project:

Location/Type:

Description


Classic Digital Control Stations provide digital control to all Lyteswitch Relay Panels and IntelliSight Occupancy Sensing systems. Each device is field-configurable, permitting functions to be changed without the use of programming terminals.

Features

- Streamlined appearance and operation
- Available in 2-, 3-, 4-, 6-, 7-, and 8-button configurations
- Easy to install; mounts in a standard single-gang electrical box
- Illuminated scene-select pushbuttons
- Field-programmable, permitting the control of one or more channels on one or more masters
- All pushbuttons may be field-labeled for easy identification
- May be mounted under Compli multi-gang faceplates with other designer-style electrical devices
- California Energy Commission's appliance efficiency regulations - Title 24 compliant for use in commercial and residential applications.

Ordering Info

LSW2BCDW	Lyteswitch	2-Button Classic Digital Control Station, White
LSW3BCDW	Lyteswitch	3-Button Classic Digital Control Station, White
LSW4BCDW	Lyteswitch	4-Button Classic Digital Control Station, White
LSW6BCDW	Lyteswitch	6-Button Classic Digital Control Station, White
LSW7BCDW	Lyteswitch	7-Button Classic Digital Control Station, White
LSW8BCDW	Lyteswitch	8-Button Classic Digital Control Station, White
LSW2BCDS	Lyteswitch	2-Button Classic Digital Control Station, Smoke
LSW3BCDS	Lyteswitch	3-Button Classic Digital Control Station, Smoke
LSW4BCDS	Lyteswitch	4-Button Classic Digital Control Station, Smoke
LSW6BCDS	Lyteswitch	6-Button Classic Digital Control Station, Smoke
LSW7BCDS	Lyteswitch	7-Button Classic Digital Control Station, Smoke
LSW8BCDS	Lyteswitch	8-Button Classic Digital Control Station, Smoke

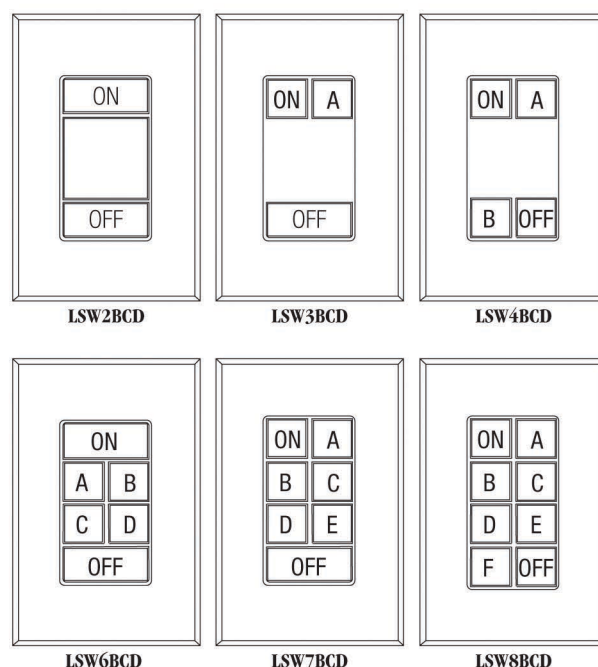

Custom engraved faceplates available.

Note:

White units include a white Compli screwless faceplate.
Smoke units include a stainless steel faceplate.

Specifications

Each Classic Digital Control Station consists of a set of pushbuttons which may be used for preset scene selection or channel intensity raise/lower control (IntelliSight only). Each remote is flush-mounted into a standard, single-gang box (not provided). All wiring is made by means of stranded CAT5e cable.

The Classic Digital Control Station illuminated pushbuttons are field-labeled and modified with graphics. There are no moving or protruding parts available to the end-user once the control station is installed.

Electrical Specifications

Input: +22 volts DC (powered by Lytemode or IntelliSight network)


Current: 20mA

Storage Temperature: -25° C to +85° C

Operating Temperature: 0° to 40° C

This Liteswitch product meets California Energy Commission's appliance efficiency regulations for Title 24 for use in commercial and residential applications.


Dimensions

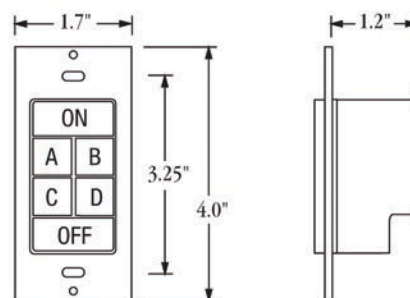

Note:

Shown without Compli Faceplate
Compli Faceplate: 2.75" x 4.5" O.A.

Wiring Diagram

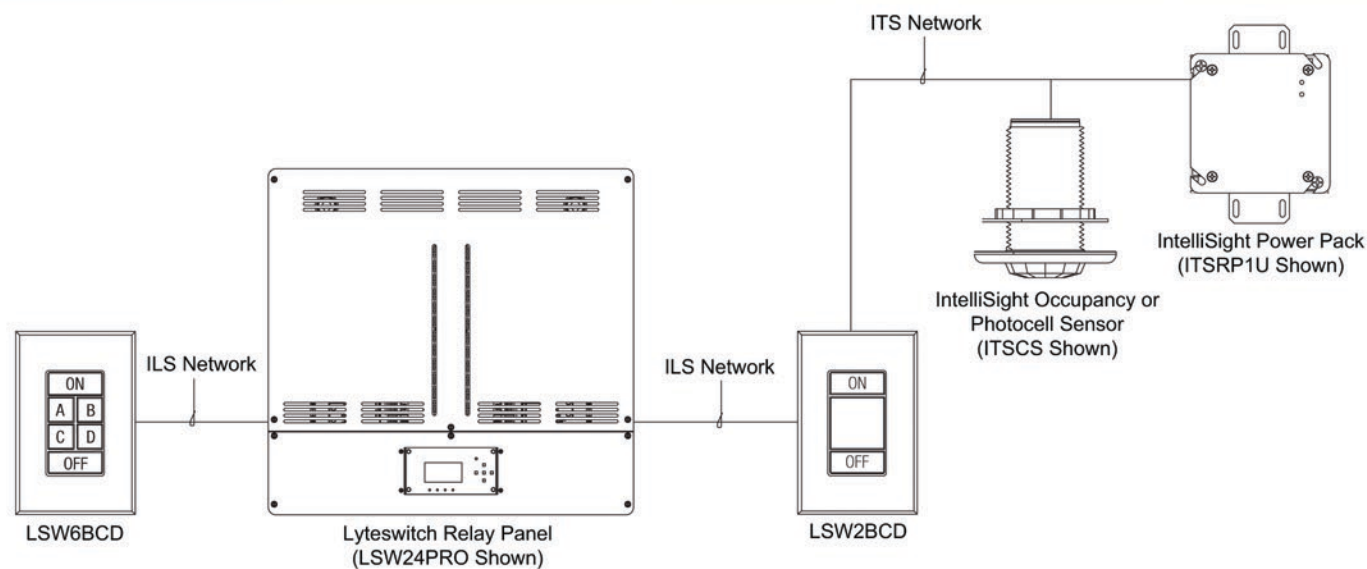

Lightolier® Controls
2828 Trade Center Dr. 130B
Carrollton, TX 75007



Technical/Sales assistance: 1-800-526-2731
Made in U.S.A. ©2009 Philips Group.
www.lolcontrols.com P/N 87-0682C