

CATALOG NO. \_\_\_\_\_

TYPE NO. \_\_\_\_\_ JOB NAME \_\_\_\_\_


# GP Flood Series Floodlighting

## GP2 (Small) LED



### ORDERING INFORMATION

Catalog Number: Example: GP204UB0304K4X4

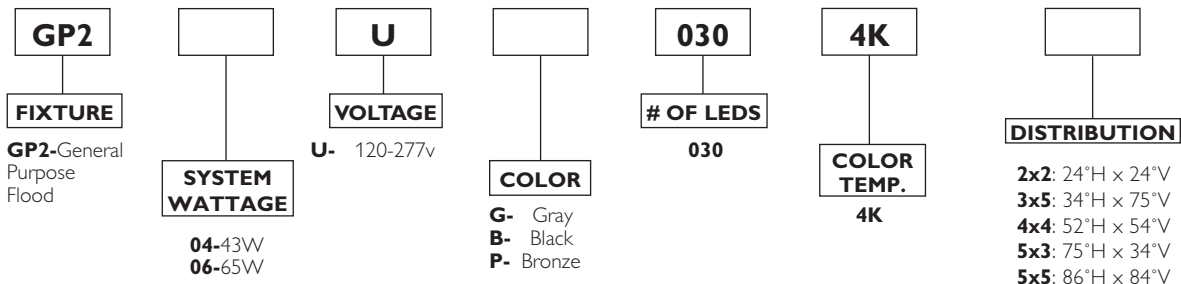


### ACCESSORIES

**GP2WG-LED** =Wire Guard

**GP2YS-LED** =Vandal Shield

**SLW10P**=Wall mount adapter to convert GP2 style fixtures. Complete with built-in splice box and knock-out for button photo control

### TECHNICAL INFORMATION

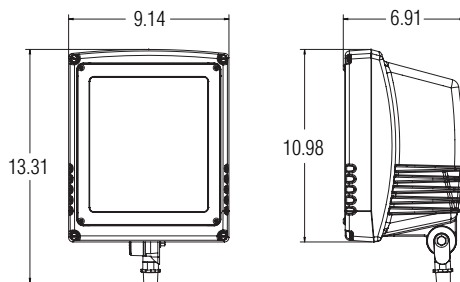

UL Wet Location Listed  
Suitable for ground mounting

### PRODUCT SPECIFICATIONS


- The GP LED Flood combines architectural design with on-site versatility and is designed for general purpose floodlighting applications
- Applications include security, accent, facade, flagpole and sign lighting
- Available in a variety of light distribution patterns in 4K color temperature
- Die-cast aluminum housing
- Extruded silicone rubber gasket for long life
- Integral heat sink ensures cool operation
- 30 LEDs available in either 40 watt or 60 watt configurations
- Lens screws are stainless steel fasteners
- Duraplex II dark bronze, black and gray polyester powder finishes as standard and also available in a variety of designer colors
- 3/4" arm with serrated teeth lock arm mount unit into position for walls and ground/flood mounting
- Unit can be aimed above or below horizontal
- Available with vandal shields, wire guards and glare shields
- Published 5-year limited warranty



# GP2 (Small) LED


## PHOTOMETRICS

Luminaire @ 43 Watts: GP2 LED 2x2 Distribution  
 Lamp: 30 White LEDs with Clear Prismatic Plastic Optics  
 Beam Spread: 12.7 Deg Horiz  
 (at 50% Max CD) 12.2 Deg Vert  
 Field Spread: 24.1 Deg Horiz  
 (at 10% Max CD) 23.6 Deg Vert  
 Beam Lumens: 1028  
 Field Lumens: 1847  
 Total Lumens: 2407

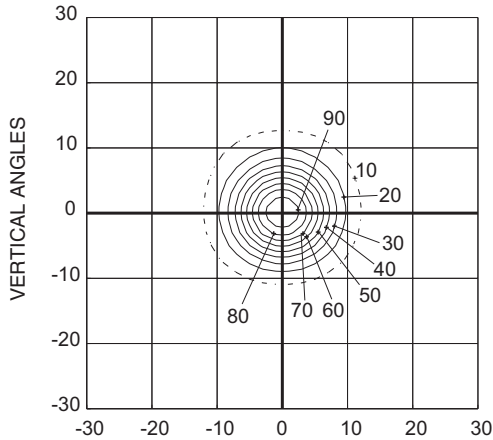


HORIZONTAL ANGLES

Luminaire @ 43 Watts: GP2 LED 4x4 Distribution  
 Lamp: 30 White LEDs with Clear Prismatic Plastic Optics  
 Beam Spread: 30.4 Deg Horiz  
 (at 50% Max CD) 31.0 Deg Vert  
 Field Spread: 51.7 Deg Horiz  
 (at 10% Max CD) 53.7 Deg Vert  
 Beam Lumens: 1213  
 Field Lumens: 1970  
 Total Lumens: 2315

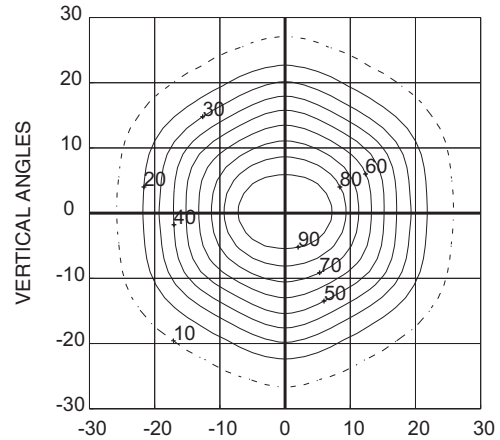


HORIZONTAL ANGLES

Luminaire @ 43 Watts: GP2 LED 5x3 Distribution  
 Lamp: 30 White LEDs with Clear Prismatic Plastic Optics  
 Beam Spread: 44.8 Deg Horiz  
 (at 50% Max CD) 16.5 Deg Vert  
 Field Spread: 74.7 Deg Horiz  
 (at 10% Max CD) 33.6 Deg Vert  
 Beam Lumens: 1080  
 Field Lumens: 1865  
 Total Lumens: 2239

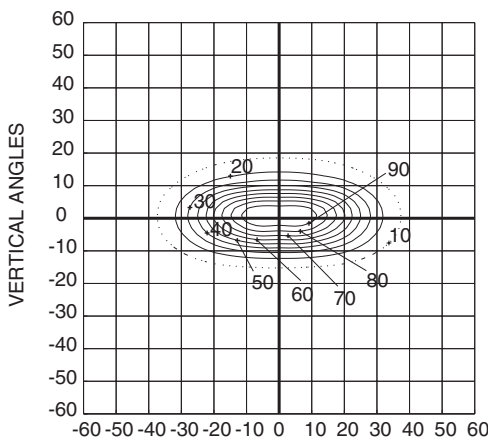

HORIZONTAL ANGLES

Luminaire @ 43 Watts: GP2 LED 5x5 Distribution  
 Lamp: 30 White LEDs with Clear Prismatic Plastic Optics  
 Beam Spread: 59.9 Deg Horiz  
 (at 50% Max CD) 54.9 Deg Vert  
 Field Spread: 85.9 Deg Horiz  
 (at 10% Max CD) 84.0 Deg Vert  
 Beam Lumens: 1575  
 Field Lumens: 2079  
 Total Lumens: 2227

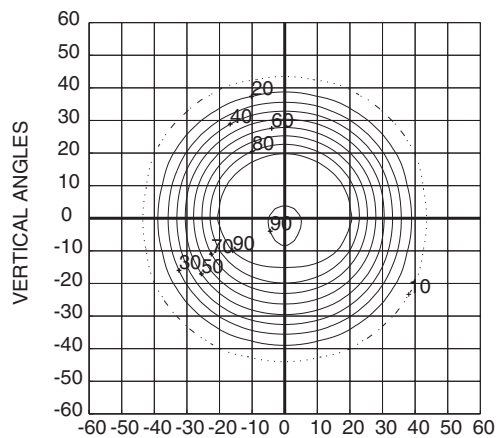

HORIZONTAL ANGLES



© 2013 Koninklijke Philips Electronics N.V. All rights reserved.  
 Specifications are subject to change without notice.  
[www.philips.com/luminaires](http://www.philips.com/luminaires)

05/13

Philips Lighting Company  
 200 Franklin Square Drive  
 Somerset, NJ 08873  
 Phone: 855-486-2216

Philips Lighting Company  
 281 Hillmount Road  
 Markham ON, Canada L6C 2S3  
 Phone: 800-668-9008