

CATALOG NO. _____

TYPE NO. _____ JOB NAME _____


GP Flood Series Floodlighting

GP3 (Medium) LED



ORDERING INFORMATION


Catalog Number: Example: GP3S09UB0494K4X4

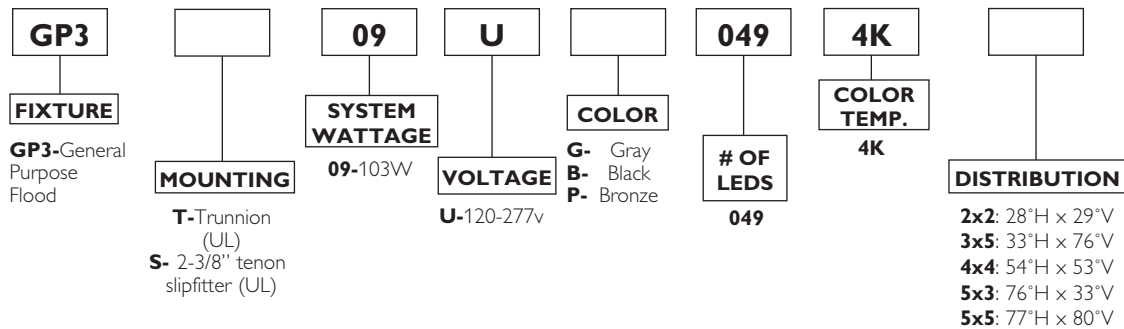

ACCESSORIES

GP3WG-LED = Wire Guard
GP3VS-LED = Vandal Shield

TECHNICAL INFORMATION

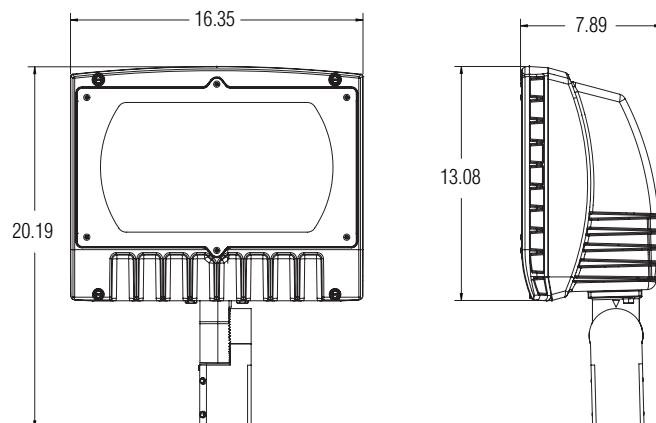

UL Wet Location Listed
Suitable for ground mounting

PRODUCT SPECIFICATION


- The GP Flood combines architectural design with on-site versatility and is designed for general purpose floodlighting applications
- Applications include security, accent, facade, flagpole, and sign lighting
- Mounting options for poles, walls and ground/ flood are available
- Available in a variety of light distribution patterns in 4K color temperature
- Fixtures available with trunnion (UL) and slipfitter (UL) mounting
- Keyhole slots on trunnion facilitate hands-free mounting
- Die-cast aluminum housing
- Extruded silicone rubber gasket for long life
- Integral heat sink ensures cool operation.
- Available with 49 LEDs at 4K color temperature
- Lens screws are stainless steel fasteners
- Duraplex II dark bronze, black and gray polyester powder finishes as standard and also available in a variety of designer colors
- Unit can be aimed above or below horizontal
- Available with vandal shields, wire guards and glare shields
- Published 5-year limited warranty




GP3 (Medium) LED

PHOTOMETRICS


Luminaire: GP3 LED 2x2 Distribution @ 103 Watts
Lamp: 49 White LEDs with Clear Prismatic Plastic Optics
Beam Spread: 14.3 Deg Horiz
(at 50% Max CD) 14.0 Deg Vert
Field Spread: 28.1 Deg Horiz
(at 10% Max CD) 28.5 Deg Vert
Beam Lumens: 2249
Field Lumens: 4390
Total Lumens: 5549

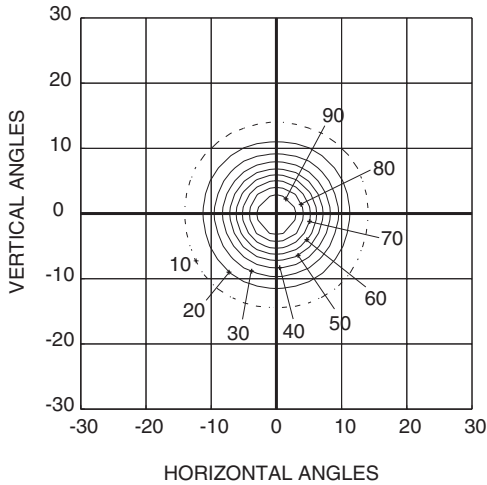


Luminaire: GP3 LED 4x4 Distribution @ 103 Watts
Lamp: 49 White LEDs with Clear Prismatic Plastic Optics
Beam Spread: 29.2 Deg Horiz
(at 50% Max CD) 29.2 Deg Vert
Field Spread: 54.2 Deg Horiz
(at 10% Max CD) 52.6 Deg Vert
Beam Lumens: 2475
Field Lumens: 4404
Total Lumens: 5315

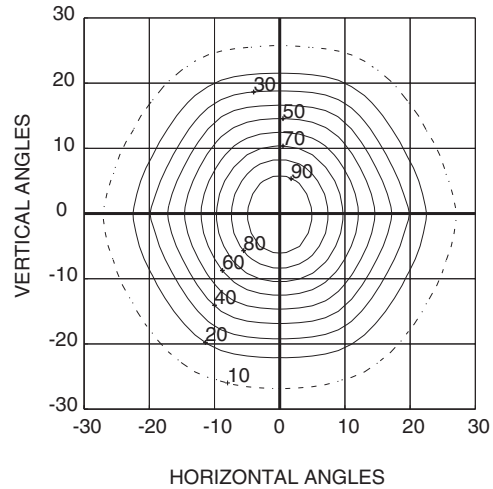

Luminaire: GP3 LED 3x5 Distribution @ 103 Watts
Lamp: 49 White LEDs with Clear Prismatic Plastic Optics
Beam Spread: 16.4 Deg Horiz
(at 50% Max CD) 44.7 Deg Vert
Field Spread: 33.1 Deg Horiz
(at 10% Max CD) 75.5 Deg Vert
Beam Lumens: 2465
Field Lumens: 4323
Total Lumens: 5211

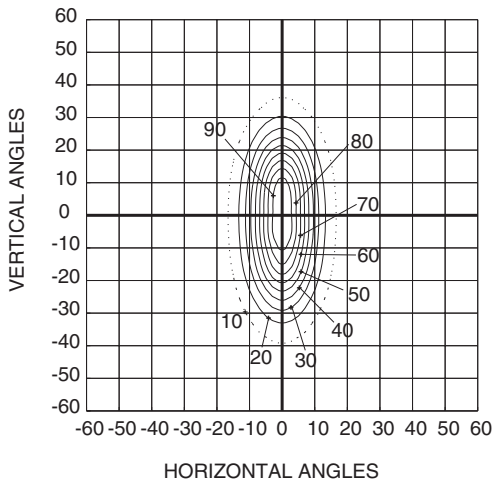

Luminaire: GP3 LED 5x5 Distribution @ 103 Watts
Lamp: 49 White LEDs with Clear Prismatic Plastic Optics
Beam Spread: 44.1 Deg Horiz
(at 50% Max CD) 48.2 Deg Vert
Field Spread: 76.7 Deg Horiz
(at 10% Max CD) 79.8 Deg Vert
Beam Lumens: 3034
Field Lumens: 4731
Total Lumens: 5227

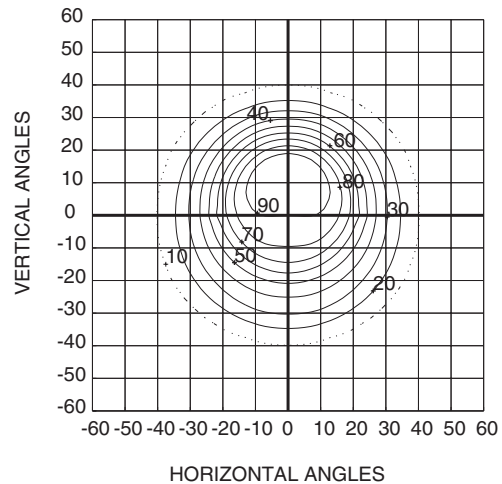

© 2013 Koninklijke Philips Electronics N.V. All rights reserved.
Specifications are subject to change without notice.
www.philips.com/luminaires

05/13

Philips Lighting Company
200 Franklin Square Drive
Somerset, NJ 08873
Phone: 855-486-2216

Philips Lighting Company
281 Hillmount Road
Markham ON, Canada L6C 2S3
Phone: 800-668-9008