

CATALOG NO. _____

TYPE NO. _____ JOB NAME _____

GP Flood Series Floodlighting GP4 (Large) Induction System

ORDERING INFORMATION

Catalog Number: Example: GP4T8584IND-4

GP	4					
SERIES	SIZE	MOUNTING	WATTAGE	COLOR TEMP.	SOURCE	VOLTAGE
GP-General Purpose Flood	4-Large	T- Trunnion (IP65 & UL) S- 2-3/8" tenon slipfitter (UL)	55- 55w 85- 85w	83-830K 84-840K 85-850K	IND- Induction	1-100-120V 4-200-277v


ACCESSORIES

GP4GS = Visor
GP4WG = Wire Guard
GP4VS = Vandal Shield

OPTIONS

PCB = Button Photo Control
TLR = Twist Lock Receptacle with Shorting Cap
TRP = Twist Lock Receptacle with Photo Control
FS = Fusing

TECHNICAL INFORMATION

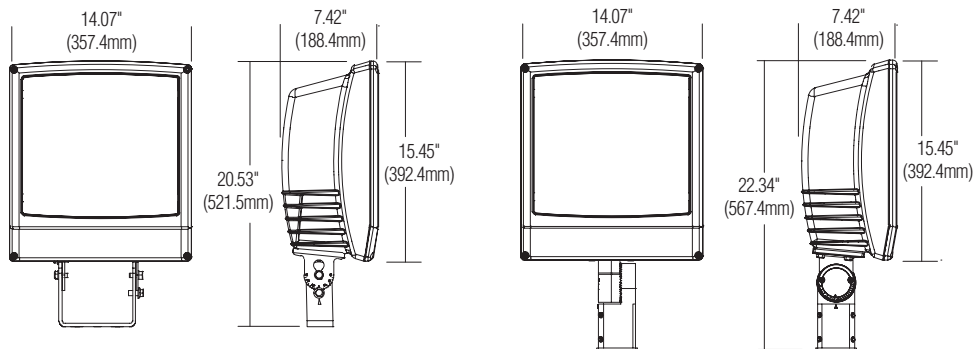

© 2013 Koninklijke Philips Electronics N.V. All rights reserved.
Specifications are subject to change without notice.
www.philips.com/luminaires



PRODUCT SPECIFICATIONS

- The GP Flood combines architectural design with on-site versatility and is designed for general purpose floodlighting applications
- Applications include security, roadway, area, accent, facade, recreational fields, flagpole, and sign lighting
- Mounting options for poles, walls and ground/flood are available
- Reflectors include general purpose, spot optics and cut-off optics IP65 Rated using trunnion mounting for extra protection against water, dust and debris
- Keyhole slots on trunnion facilitate hands-free mounting
- One piece die cast aluminum door with clear tempered glass lens is hinged to the die cast aluminum housing for easy maintenance
- Extruded silicone rubber gasket for long life Integral heat sink ensures cool operation
- Lens screws are captive stainless steel fasteners
- Duraplex II dark bronze polyester powder finish is standard and also available in a variety of designer colors
- Unit can be aimed above or below horizontal Available with vandal shields, wire guards and glare shields
- Published 5-year limited warranty
- IP65 Rated
- 100,000 hour rated life

PHILIPS
Stonco