


CATALOG NO. _____

TYPE NO. _____

JOB NAME _____

Survi'VR Series Vandal-Resistant Luminaire (16" Round Shallow Wall Mount)

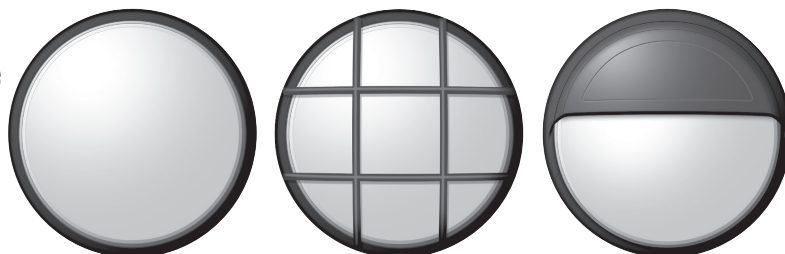

ORDERING INFORMATION

Catalog Number: Example: SR6SW50LXFB8GCB

Series	Shape	Size	Depth	Mounting	Wattage	Source	Options	Base Color*	Voltage	Style	Lens	Face Color
S= Survi-VR	R= Round	6= 16"	S= Shallow	W= Wall	50= 50 126= 1X26 132= 1X32 142= 1X42 226= 2X26 232= 2X32 242= 2X42 326= 3X26	LX= HPS PM= PS MH NX= HPS (NPF) ¹ HF= Compact Fluorescent (HPF)	L= Lamped U= UV Shield ² Q= Quartz Aux F= Fusing T= Thru Wiring ³ PC= Photo Control ⁴	B= Black W= White P= Bronze	1= 120 8= 120-277	B= Open Bezel G= Grid E= Closed Eyelid	O= Opal C= Clear A= Acrylic ⁵	B= Black W= White P= Bronze

¹ 120V only.

² For MH lamps only.


³ Unavailable with trim rings.

⁴ Available in reduced wattages (50w max. MH/HPS).
Consult factory.


⁵ Not recommended for use in high-abuse areas.

*Custom colors available. Consult factory.

TECHNICAL INFORMATION

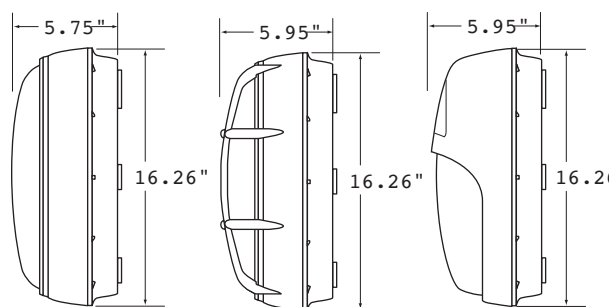

Mounting Height 10 ft.
Grid scale 10 ft. per increment

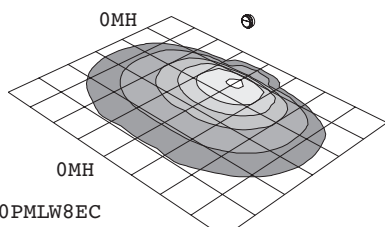

SR6SW70PMLW8EC
16" Shallow Closed Eyelid
70w metal halide

Horizontal Footcandles
Lumen/Lamp = 4,750
Light Loss Factor = 1.00

.1 FT	.2 FT	.5 FT	1 FT	2 FT	5 FT	10 FT	20 FT	50 FT	100 FT
-------	-------	-------	------	------	------	-------	-------	-------	--------

- Precision die-cast 360 alloy marine-grade aluminum back plate with cast-in mounting knock-outs.
- Finished in Duraplex II polyester powder coat.
- One-piece injection molded and UV-stabilized polycarbonate face with snap-in, interlocking lens provision.
- Color molded into the polycarbonate face for durable, scratch-resistant finish.
- Locking recessed set screw at the 1:00 o'clock position is unobtrusive, securely locking the face and lens to the cast housing.
- Die-cut neoprene rubber gasket provides added protection against elements between back casting and mounting surface.
- Silicone rubber gasket seals optics/face styles to outer rim of back casting. Also acts as a shock absorber providing additional support against breakage.
- HID units equipped with magnetic ballasts.
- Compact Fluorescent units equipped with an electronic HPF ballast with 120-277 voltage sensing capability.
- Lens is a one-piece, injection-molded, UV-stabilized polycarbonate.
- Internal prisms re-direct the light minimizing hot spots and maximizing uniformity.
- Available in either clear prismatic or opal prismatic polycarbonate.
- Twist and seal construction locks the lens and face onto the back casting.
- Extruded silicone gasket provides a tight weather-resistant seal. Unique "Shock and Seal" design provides a cushion that supports/seals the lens against the elements and also acts as a shock absorber to help reduce damage from impact to the unit face.
- HID units equipped with a precision die-form segmented reflector.
- Compact Fluorescent units equipped with a high reflectance white pan reflector system.
- Wall-mounted units equipped with additional kick plates to direct the light down and out into a Type III pattern with a minimum 4:1 spacing ratio.
- UL listed for wet locations.

UL listed for wet locations