


CATALOG NO. \_\_\_\_\_

TYPE NO. \_\_\_\_\_ JOB NAME \_\_\_\_\_

# **Survi'VR L Series** **Vandal-Resistant Luminaire** **(8' Linear Fluorescent)**

## **ORDERING INFORMATION**




Catalog Number: Example: SLTO2321K4YBF

S	L							
SERIES	STYLE	LENS	LAMPS	WATTAGE	VOLTAGE	BALLAST SOURCE	COLOR	OPTIONS
<b>S</b> Survi'VR Series Vandal Resistant	<b>LT</b> -Wide Tandem (11")	<b>O</b> -Opal Poly <b>C</b> -Clear Poly	<b>2</b> (per cross section)	<b>28</b> -28W T5 <b>32</b> -32W T8 <b>54</b> -54W T5HO	<b>1</b> -120V <b>7</b> -277V <b>B</b> -120-277V	<b>N8Y</b> -T5 <b>K4Y</b> -T8 <b>S4Y</b> -T5HO	<b>B</b> -Black <b>W</b> -White <b>P</b> -Bronze	<b>F</b> -Fused <b>Battery Back-Up</b> Consult Factory

## **PHOTOMETRIC DATA**

Mounting Height = 12 ft.  
Gridscale = 12 ft. per increment





SLTO232K4YW  
8' Linear - Ceiling Mount  
4-32w T8 fluorescent

Horizontal Footcandles  
Lumen/Lamp = 2,850  
Light Loss Factor = 1.00

.1 FT-C	.2 FT-C	.5 FT-C	1 FT-C	2 FT-C	5 FT-C
---------	---------	---------	--------	--------	--------

## **TECHNICAL INFORMATION**

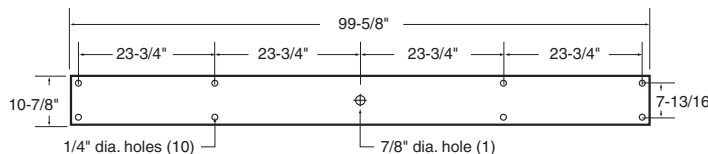

## **PRODUCT SPECIFICATIONS**

- Marine-grade, extruded aluminum housing
- Tamper-resistant stainless steel hardware
- Architectural die-cast end caps
- Polyester powder, semi-gloss textured finish
- Standard color is white
- Fade-resistant color (custom colors available – consult factory)
- High-Efficiency T5, T5HO and T8 lamping
- Exceptionally high fixture efficiency
- 91.7% maintained lumens with high CRI of 85
- .156" thick extruded impact-resistant polycarbonate lens
- Delivers uniform illumination without glare
- Lens available in clear prismatic and opal prismatic
- Immediate hot re-strike
- Greater uniformity and instant-on capability
- No color shift
- Field drilling not required
- "LifeLyte" limited lifetime warranty
- UL/CUL listed for wet locations

**UL** **us** UL Damp Location Listed.  
UL File Number: E86021