



Translite, Gallery 16 Open Back, Low Voltage Metal Luminaire

Page 1 of 2

System Options



Cable



Twin Rail




Basis Ceiling



Basis Wall



Liana

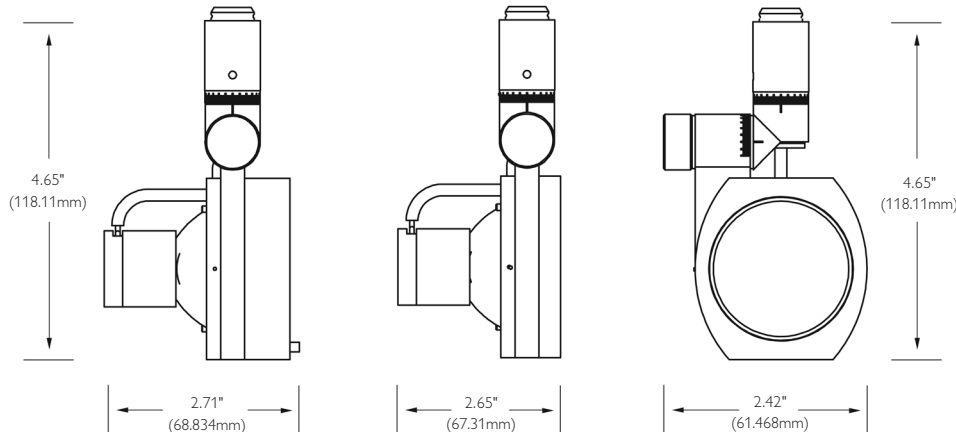

*Fixture terminates to track system or monopoint with Transjack connector. Fixtures ordered with system code include Transjack connector for that system. Order fixture with "NS" code when using a monopoint.

†Requires a minimum overall length of 10" with monopoint canopies.

Ordering information

Fixture	Size	System	Overall length†	Optional lighting	Metal finish	Accessory holder
GLO - Gallery Open Back	16 - MR16 lamp	CA4 - Cable 4" CA6 - Cable 6" TR4 - Twin Rail 4" TR6 - Twin Rail 6" BTC - Basis Track BTW - Basis Wall (max. 16") LT - Liana NS - No System Connector*	Stem: ST - Standard 5" 6" - 72" Specify Length (in 6" increments) (When ordering a non-standard overall length, use whole numbers only - no fractional inches.)	27F Philips EnduraLED 7 watt, 2700k 24° flood 30F Philips EnduraLED 7 watt, 3000k 24° flood Leave blank for standard MR-16 (lamp not included)	AL - Satin Aluminum GB - Gloss Black	1 - Single holder 3 - Triple holder

Features

- Description:** Adjustable fixture. Precision machined, adjustable luminaire. Single knob vertical and horizontal locking. Single accessory holder standard. Optional triple accessory holder with standard lock mechanism allows for accessory aiming consistency.
- System options:** Gallery 16 Open Back is available for Cable 4" & 6", Twin Rail 4" & 6", Basis Ceiling Mount, Basis Wall Mount, Liana and low voltage monopoints.
- Lamping:** MR16 50w max.
- Electrical:** Transjack connector contacts utilize 24kt gold plated brass pin and sleeve connectors housed in aluminum. Field replaceable lamp socket standard.
- Function:** 180 degree vertical pivot and 360 degree horizontal rotation. Toolless relamping without disrupting aiming. Overall stem length not field cuttable.
- Net weight 1 lb.**

Accessories

Glass, Spread and Color Lenses, UV and Mixing Filters, Reduction Screens, Hex Louver, Snoot, Wall Wash Snoot, Cross Blade Snoot, Backshield.

Finishes

- Satin Aluminum**
- Gloss Black**

Labels

UL and cUL listed for dry locations only.

Job Information Type:

Job Name:

Cat. No.:

Notes:

Translite, Gallery 16 Open Back, Low Voltage Metal Luminaire

Measuring overall length

Track system fixtures

Overall length for a track system fixture is measured from the bottom of the track to the bottom of the fixture.

To calculate overall length, take the distance from the bottom of the fixture to the top of the Transjack connector* and add the system connector measurement for the selected system. Overall length differs according to the system connector selected.


Basis	Cable Twin Rail	Liana	NS
-------	-----------------	-------	----

System Connector Measurement	.38"	.63"	.94"	0"
------------------------------	------	------	------	----

Monopoints

Overall length for a monopoint fixture is measured from bottom of the monopoint to the bottom of the fixture. (The monopoint canopy is measured separately.)

This measurement is equivalent to the distance from the bottom of the fixture to the top of the Transjack connector*.

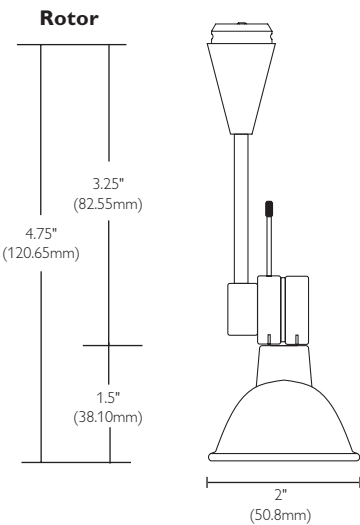

Track system fixture example

To calculate the overall length for the Rotor fixture on a Liana track system, add 4.75" to 0.94. Overall length for a standard Rotor fixture on the Liana Track is 5.69". A Rotor fixture specified at 10" would have an overall length of 10.94" on Liana.

Monopoint fixture example

Overall length for a standard Rotor fixture on a monopoint is 4.75". A Rotor fixture specified at 10" would have an overall length of 10" on a monopoint.

* In the drawing above, the distance from the bottom of the fixture to the top of the Transjack connector equals 4.75". This represents the standard (ST) length for this fixture. ST measurements in the product ordering tables are approximate for

stem suspended fixtures and do not represent exact overall length. For exact ST measurements for stem suspended fixtures, reference the specification drawings.

