


# MSN1

## Translite Systems, Mini Solmon

Page 1 of 3

### System Options

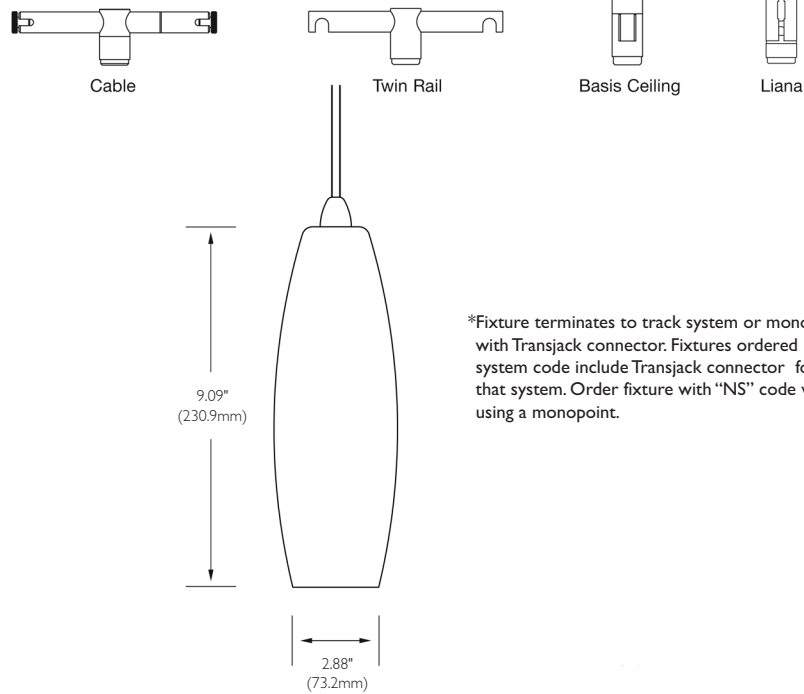

### Ordering Information

Fixture	System	Overall Length	Diffuser Color	Metal Finish
<b>MSN1</b> - Mini Solmon, Cable Suspended	<b>CA4</b> - Cable 4" <b>CA6</b> - Cable 6" <b>TR4</b> - Twin Rail 4" <b>TR6</b> - Twin Rail 6" <b>BTC</b> - Basis Ceiling <b>LT</b> - Liana <b>NS</b> - No System Connector*	<b>Cable:</b> <b>ST</b> - Standard 72" <b>24" - 72"</b> - Specify Length (in 12" increments)  (When ordering a non-standard overall length, use whole numbers only - no fractional inches.)	<b>TM</b> - Solomon Red <b>SW</b> - Sausalito White <b>GB</b> - Gloss Black <b>PW</b> - Polar White	<b>AL</b> - Satin Aluminum <b>PN</b> - Polished Nickel <b>RB</b> - Rubbed Bronze <b>GB</b> - Gloss Black* <b>WH</b> - White*  (*Gloss Black and White are only available for BTC, BTW and NS.)

Job Information	Type:
Job Name:	
Cat. No.:	
Notes:	


**PHILIPS**  
**LIGHTOLIER**

# MSN1

## Translite Systems, Mini Solmon

Page 2 of 3

### System Options

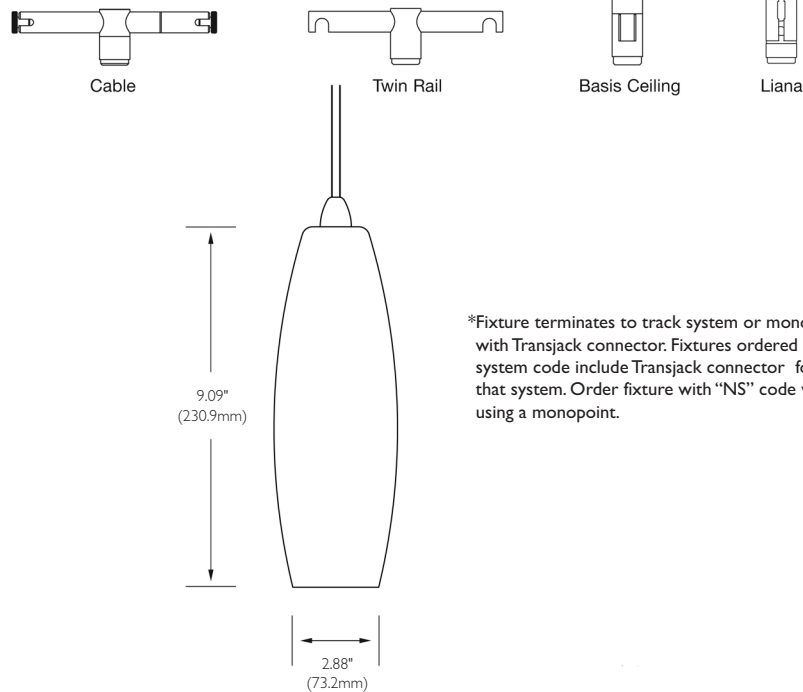

\*Fixture terminates to track system or monopoint with Transjack connector. Fixtures ordered with system code include Transjack connector for that system. Order fixture with "NS" code when using a monopoint.

### Features

- Description:** Multi layered hand-blown glass pendant with enamel white inner casing. Hand blown by artisans. Available in four captivating colors and five metal finishes.
- System Options:** Mini Solmon is available for Cable 4" & 6", Twin Rail 4" and 6", Basis Ceiling Mount, Liana and low voltage monopoints.
- Lamping:** GY6.35 bi-pin 35w max. For use with open fixture rated lamp only.
- Electrical:** Transjack connector contacts utilize 24kt gold plated brass pin and sleeve connectors housed in aluminum.
- Function:** Suspended by field adjustable tin braided cable.
- Net glass weight:** 1 lb.

### Diffuser Colors

- Solmon Red
- Sausalito White
- Gloss Black
- Polar White

### Metal Finishes

- Satin Aluminum
- Polished Nickel
- Rubbed Bronze – finish is crafted with solid brass substrate and buffed by hand to create an authentic rubbed bronze finish. Due to this hand-applied process, finish may vary.
- Gloss Black
- White

### Labels

ULand cUL listed for dry locations only.

<b>Job Information</b>	<b>Type:</b>
------------------------	--------------

**PHILIPS**  
**LIGHTOLIER**

# MSN1

## Translite Systems, Mini Solmon

Page 3 of 3

### Measuring Overall Length

#### Track System Fixtures

Overall length for a track system fixture is measured from the bottom of the track to the bottom of the fixture.


To calculate overall length, take the distance from the bottom of the fixture to the top of the Transjack connector\* and add the system connector measurement for the selected system. Overall length differs according to the system connector selected.

	Basis	Cable Twin Rail	Liana	NS
System Connector Measurement	.38"	.63"	.94"	0"

#### Monopoints

Overall length for a monopoint fixture is measured from bottom of the monopoint to the bottom of the fixture.  
(The monopoint canopy is measured separately.)

This measurement is equivalent to the distance from the bottom of the fixture to the top of the Transjack connector.\*

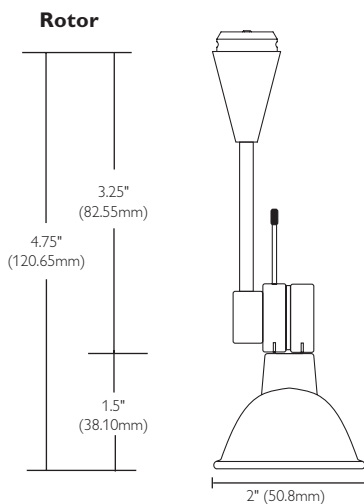

#### Track System Fixture Example

To calculate the overall length for the Rotor fixture on a Liana track system, add 4.75" to 0.94. Overall length for a standard Rotor fixture on the Liana Track is 5.69". A Rotor fixture specified at 10" would have an overall length of 10.94" on Liana.

#### Monopoint Fixture Example

Overall length for a standard Rotor fixture on a monopoint is 4.75". A Rotor fixture specified at 10" would have an overall length of 10" on a monopoint.

\* In the drawing above, the distance from the bottom of the fixture to the top of the Transjack connector equals 4.75". This represents the standard (ST) length for this fixture. ST measurements in the product ordering tables are approximate for stem suspended fixtures and do not represent exact overall length. For exact ST measurements for stem suspended fixtures, reference the specification drawings.



Philips Lightolier  
e: [lol.webmaster@philips.com](mailto:lol.webmaster@philips.com)  
t: (508) 679-8131  
w: [www.lightolier.com](http://www.lightolier.com)

MSN1 November 15, 2011

Specifications are subject to change without notice.  
© Koninklijke Philips Electronics N.V., 2011. All rights reserved.

Job Information Type: