


Catalog number:


Notes:

Type:

System Options



Cable




Twin Rail



Basis



Liana

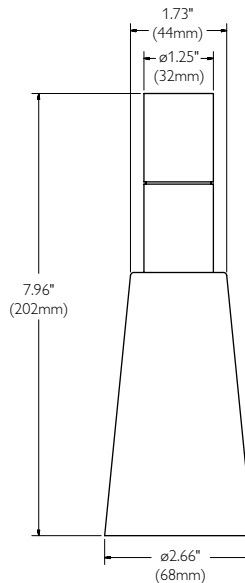

*Fixture terminates to track system or monopoint with Transjack connector. Fixtures ordered with system code include Transjack connector for that system. Order fixture with "NS" code when using a monopoint.

Ordering information

| Fixture | System | Overall length | Metal finish |
|-------------------|---|--|---|
| POM1- Pomo | CA4 - Cable 4" CA6 - Cable 6" BTC - Basis Ceiling TR4 - Twin Rail 4" TR6 - Twin Rail 6" LT - Liana NS - No system connector* | Cable ST - Standard 72" 24" - 72" - Specify length (in 12" increments) (When ordering a non-standard overall length, use whole numbers only - no fractional inches.) | AL - Aluminum PN - Polished nickel GB - Gloss black WH - White |

Features

- Description:** Pomo fixture is a decorative mini glass pendant. The outer glass is clear and the inner glass is polar white. Open fixture rated low voltage.
- System options:** Pomo is available for cable 4" & 6", Basis ceiling mount, Twin Rail 4" & 6", Liana, and low voltage monopoints.
- Lamping:** GY6.35 bi-pin 35w max. For use with open fixture rated lamp only (not included).
- Electrical:** Transjack connector contacts utilize 24kt gold plated brass pin and sleeve connectors housed in aluminum.
- Function:** Suspended by field adjustable cable.

Metal finishes

- Aluminum**
- Polished nickel**
- Gloss black**
- White**

Labels

UL and cUL listed for dry locations only.

Measuring overall length

Track System fixtures

Overall length for a track system fixture is measured from the bottom of the track to the bottom of the fixture.


To calculate overall length, take the distance from the bottom of the fixture to the top of the Transjack connector* and add the system connector measurement for the selected system. Overall length differs according to the system connector selected.

| | Basis | Cable Twin | Liana | NS |
|------------------------------|-------|------------|-------|----|
| | Rail | | | |
| System connector measurement | .38" | .63" | .94" | 0" |

Monopoints

Overall length for a monopoint fixture is measured from bottom of the monopoint to the bottom of the fixture.
(The monopoint canopy is measured separately.)

This measurement is equivalent to the distance from the bottom of the fixture to the top of the Transjack connector.*

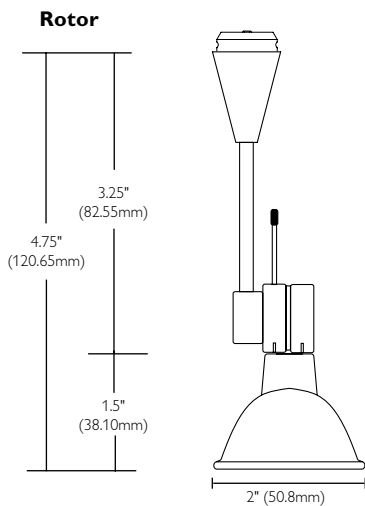

Track System fixture example

To calculate the overall length for the Rotor fixture on a Liana track system, add 4.75" to 0.94. Overall length for a standard Rotor fixture on the Liana Track is 5.69". A Rotor fixture specified at 10" would have an overall length of 10.94" on Liana.

Monopoint fixture example

Overall length for a standard Rotor fixture on a monopoint is 4.75". A Rotor fixture specified at 10" would have an overall length of 10" on a monopoint.

* In the drawing above, the distance from the bottom of the fixture to the top of the Transjack connector equals 4.75". This represents the standard (ST) length for this fixture. ST measurements in the product ordering tables are approximate for

stem suspended fixtures and do not represent exact overall length. For exact ST measurements for stem suspended fixtures, reference the specification drawings.



Philips Lightolier
e: lol.webmaster@philips.com
t: (508) 679-8131
w: www.lightolier.com

POM1 September 4, 2012

Specifications are subject to change without notice.
© Koninklijke Philips Electronics N.V., 2012. All rights reserved.