


Translite, Pippa LED Pendant

Page 1 of 1

Catalog number:

Notes:

Type:

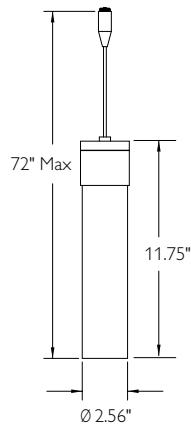

Ordering guide: PPL1-BTC-ST-VR-N2-W-AL

Fixture	System	Overall length	Diffuser color	Lamping	Metal finish
PPL1 Pippa pendant	CA4 4" Cable CA6 6" Cable TR4 4" Twin rail TR6 6" Twin rail BTC Basis ceiling LT Liana NS No system connector	ST Standard 72" 24-72" Specify length (in 12" increments)	VR Mt. Vernon red SW Sausalito white TG Turner gold PW Polar white	N2-W One 2.4 watt Nichia 2700K N2-N One 2.4 watt Nichia 3500K	AL Satin aluminum PN Polished nickel RB Rubbed bronze GB ² Gloss black paint WH ² White paint

We reserve the right to change details of design, materials, and finish.

²Available for BTC and NS only.

Features

- Description:** Five layered, hand blown glass pendant with enamel white inner casing. Available in four diffuser colors and five metal finishes.
- Lamping:** Single LED producing approximately 80 lumens out of the luminaire, offered in 2700K warm temperature and 3500K neutral temperature.
- Suspension options:** UL listed 2/20 AWG conductor with braided steel jacket. Standard 72" or cut to specified length (field adjustable).
- Electrical:** Integral LED driver requiring 12V supply from magnetic transformer. Transformer may be remote mounted up to 10' away or integral to fixture. Also compatible with MPT1A-L1 monopoint.
Input voltage: 12Vac
Nominal input power: 3.2W
Dimming: Not dimmable

Labels



listed for dry locations only.