


Translite Systems, Retro 20d

Page 1 of 3


System Options

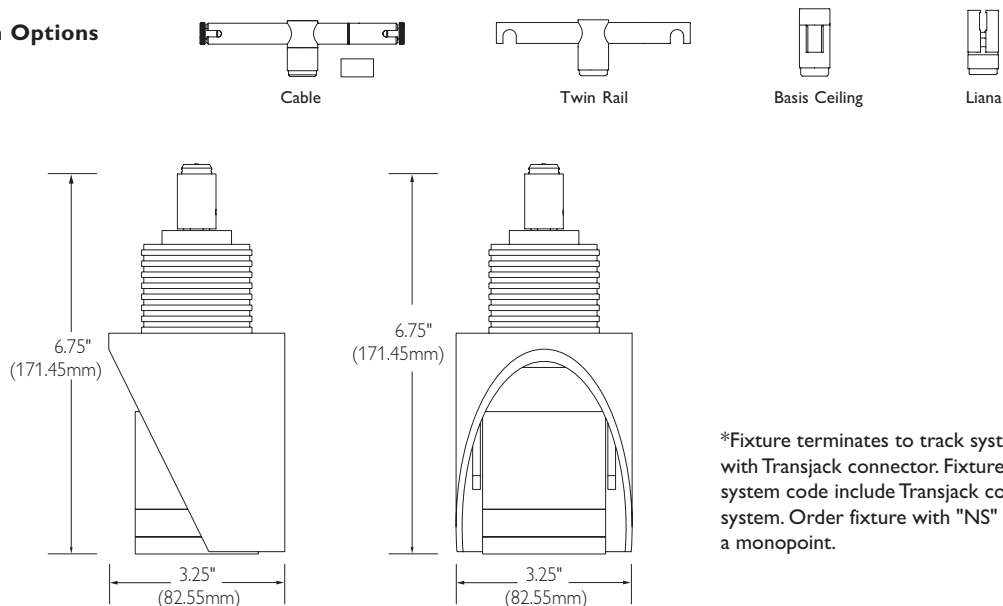

Ordering Information

Fixture	System	Overall Length	Metal Finish
RED- Retro 20d Cable Suspended	CA4 - Cable 4" CA6 - Cable 6" TR4 - Twin Rail 4" TR6 - Twin Rail 6" BTC - Basis Ceiling LT - Liana NS - No System Connector*	ST - Standard 7" 12" - 72" - Specify Length (in 6" increments) (When ordering a non-standard overall length, use whole numbers only - no fractional inches.)	AL - Satin Aluminum PN - Polished Nickel RB - Rubbed Bronze (Rubbed Bronze is not available for Twin Rail)

Job Information	Type:
Job Name: Cat. No.: Notes:	

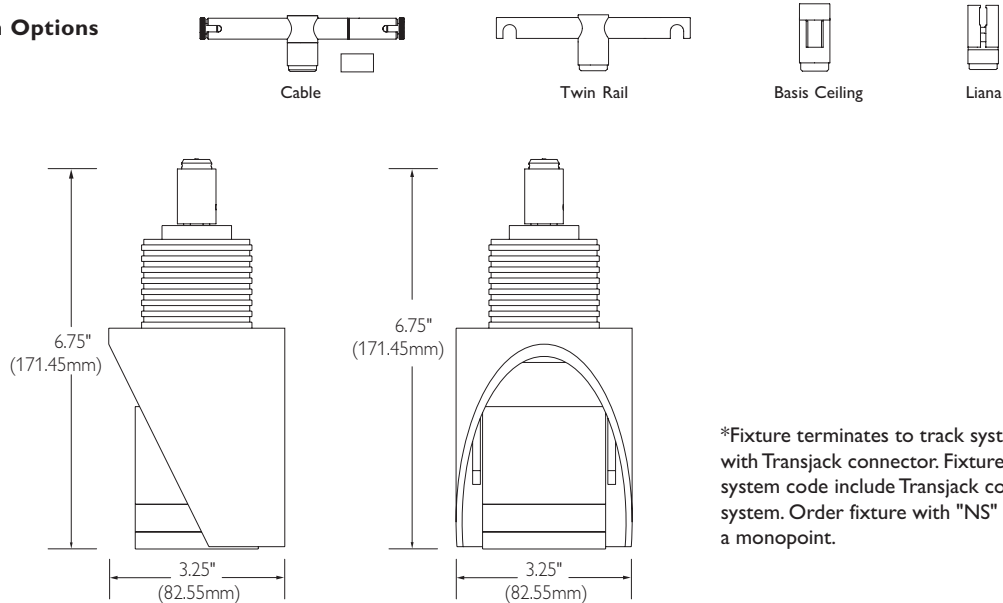System Options**Features**

- 1. Description:** Unique shielded fixture with internal aimable optical chamber. Made from precision machined metal with integral single accessory holder and clear lens.
- 2. System Options:** Retro 20d is available for Cable 4" & 6", Twin Rail 4" & 6", Basis Ceiling Mount, Liana and low voltage monopoints.
- 3. Lamping:** MR16 50w max.
- 4. Function:** Rotates 360 degrees. Lamp pivots 90 degrees. Overall length is not field adjustable.
- 5. Electrical:** Transjack connector contacts utilize 24kt gold plated brass pin and sleeve connector housed in aluminum.

Filters, louvers, snoots, glass rings and double accessory holder.

Metal Finishes

- 1. Satin Aluminum**
- 2. Polished Nickel**
- 3. Rubbed Bronze** – finish is crafted with a solid brass substrate and buffed by hand to create an authentic rubbed bronze finish. Due to this hand-applied process, finish may vary.

Labels

UL and cUL listed.

Accessories

Job Information	Type:
------------------------	--------------

Measuring Overall Length

Track System Fixtures

Overall length for a track system fixture is measured from the bottom of the track to the bottom of the fixture.


To calculate overall length, take the distance from the bottom of the fixture to the top of the Transjack connector* and add the system connector measurement for the selected system. Overall length differs according to the system connector selected.

	Basis	Cable Twin Rail	Liana	NS
System Connector Measurement	.38"	.63"	.94"	0"

Monopoints

Overall length for a monopoint fixture is measured from bottom of the monopoint to the bottom of the fixture. (The monopoint canopy is measured separately.)

This measurement is equivalent to the distance from the bottom of the fixture to the top of the Transjack connector.*

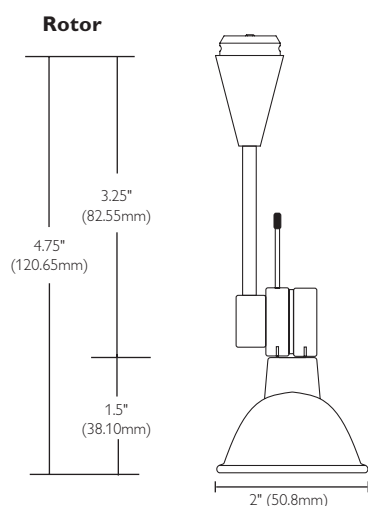

Track System Fixture Example

To calculate the overall length for the Rotor fixture on a Liana track system, add 4.75" to 0.94. Overall length for a standard Rotor fixture on the Liana Track is 5.69". A Rotor fixture specified at 10" would have an overall length of 10.94" on Liana.

Monopoint Fixture Example

Overall length for a standard Rotor fixture on a monopoint is 4.75". A Rotor fixture specified at 10" would have an overall length of 10" on a monopoint.

* In the drawing above, the distance from the bottom of the fixture to the top of the Transjack connector equals 4.75". This represents the standard (ST) length for this fixture. ST measurements in the product ordering tables are approximate for stem suspended fixtures and do not represent exact overall length. For exact ST measurements for stem suspended fixtures, reference the specification drawings.



Philips Lightolier
e: lol.webmaster@philips.com
t: (508) 679-8131
w: www.lightolier.com

RED November 2, 2011

Specifications are subject to change without notice.
© Koninklijke Philips Electronics N.V., 2011. All rights reserved.

Job Information **Type:**