

REG

Translite Systems, Retro Glass


Page 1 of 3

Catalog number:

Notes:

Type:

System Options

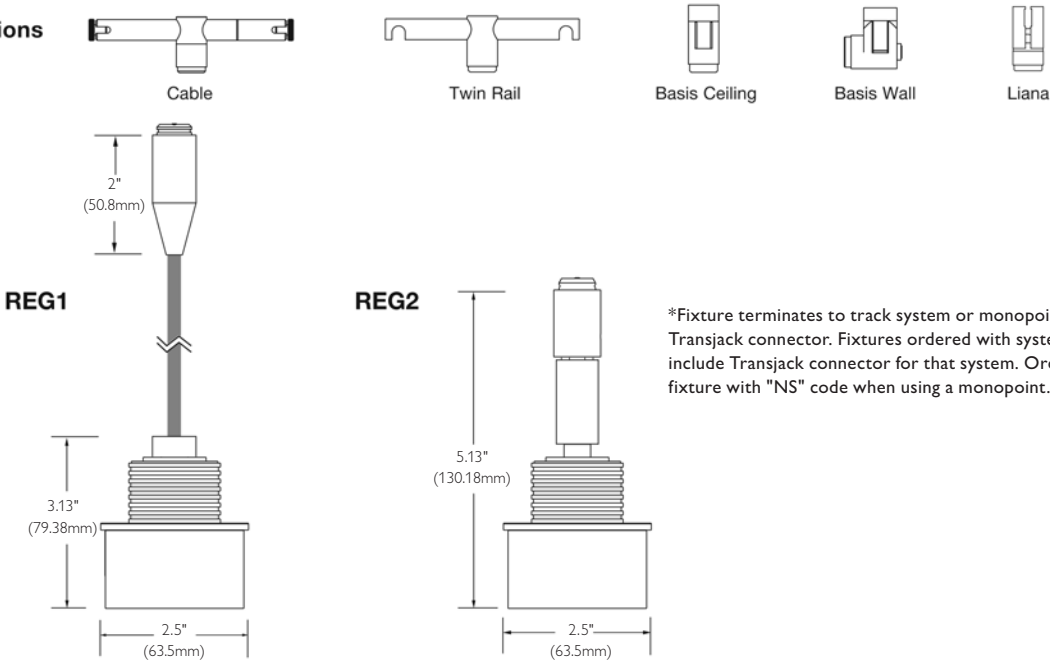

Ordering Information

Fixture	System	Drop length	Diffuser color	Metal finish
REG1 - Retro Glass Cable Suspended	CA4 - Cable 4" CA6 - Cable 6" TR4 - Twin Rail 4" TR6 - Twin Rail 6" BTC - Basis Ceiling BTW - Basis Wall (max. 16") LT - Liana NS - No System Connector*	Cable: ST - Standard 72" 72" - Specify Length (in 12" increments) Stem: ST - Standard 5" 6" - 72" - Specify Length (in 6" increments) (When ordering non-standard drop length, use whole numbers only - no fractional inches.)	VR - Mt. Vernon Red SW - Sausalito White TG - Turner Gold PW - Polar White	AL - Satin Aluminum PN - Polished Nickel
REG2 - Retro Glass Stem Suspended				

REG

Translite Systems, Retro Glass

Page 2 of 3

System Options



Cable



Twin Rail



Basis Ceiling




Basis Wall




Liana

REG1

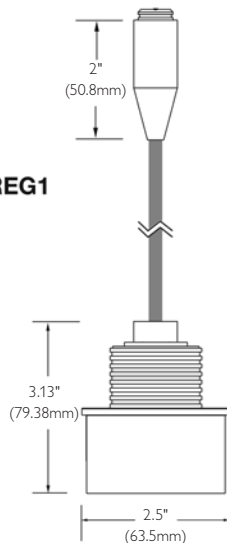

REG2

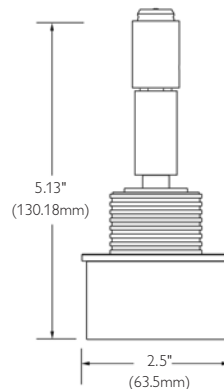

*Fixture terminates to track system or monopoint with Transjack connector. Fixtures ordered with system code include Transjack connector for that system. Order fixture with "NS" code when using a monopoint.

Features

- Description:** Precision machined luminaire. Available in four diffuser colors.
- System options:** Retro Glass is available for Cable 4" & 6", Twin Rail 4" & 6", Basis Ceiling Mount, Basis Wall Mount, Liana and low voltage monopoints.
- Lamping:** Capsule 35w max or MR16 50w max. For use with open fixture rated lamp only.
- Function:** Rotates 360 degrees and pivots 90 degrees at socket. Suspended by metal rod or cable. Cable suspension is field adjustable. Stem suspension is not field adjustable.
- Electrical:** Transjack connector contacts utilize 24kt gold plated brass pin and sleeve connector housed in aluminum.

Finishes

- Satin Aluminum
- Polished Nickel
- Rubbed Bronze - finish is crafted with a solid brass substrate and buffed by hand to create an authentic rubbed bronze finish. Due to this hand-applied process, finish may vary.

Labels

UL and cUL listed.

Diffuser colors

- Mt. Vernon Red
- Sausalito White
- Turner Gold
- Polar White

Measuring overall length

Track system fixtures

Overall length for a track system fixture is measured from the bottom of the track to the bottom of the fixture.


To calculate overall length, take the distance from the bottom of the fixture to the top of the Transjack connector* and add the system connector measurement for the selected system. Overall length differs according to the system connector selected.

	Basis	Cable Twin Rail	Liana	NS
System Connector Measurement	.38"	.63"	.94"	0"

Monopoints

Overall length for a monopoint fixture is measured from bottom of the monopoint to the bottom of the fixture. (The monopoint canopy is measured separately.)

This measurement is equivalent to the distance from the bottom of the fixture to the top of the Transjack connector.*

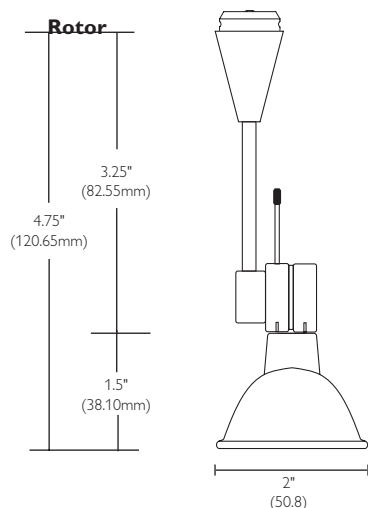

Track system fixture example

To calculate the overall length for the Rotor fixture on a Liana track system, add 4.75" to 0.94. Overall length for a standard Rotor fixture on the Liana Track is 5.69". A Rotor fixture specified at 10" would have an overall length of 10.94" on Liana.

Monopoint fixture example

Overall length for a standard Rotor fixture on a monopoint is 4.75". A Rotor fixture specified at 10" would have an overall length of 10" on a monopoint.

* In the drawing above, the distance from the bottom of the fixture to the top of the Transjack connector equals 4.75". This represents the standard (ST) length for this fixture. ST measurements in the product ordering tables are approximate for

stem suspended fixtures and do not represent exact overall length. For exact ST measurements for stem suspended fixtures, reference the specification drawings.



Philips Lightolier
e: lol.webmaster@philips.com
t: (508) 679-8131
w: www.lightolier.com

REG May 21, 2012

Specifications are subject to change without notice.
© Koninklijke Philips Electronics N.V., 2012. All rights reserved.