

## Translite Systems, Retro 16



Page 1 of 3

Catalog number:

Notes:

Type:

## System Options

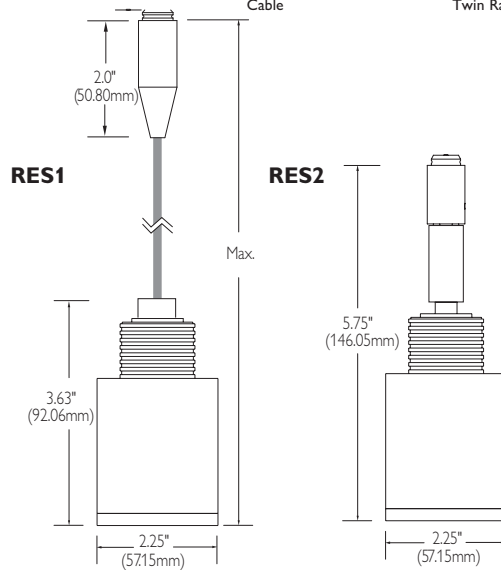


\*Fixture terminates to track system or monopoint with Transjack connector. Fixtures ordered with system code include Transjack connector for that system. Order fixture with "NS" code when using a monopoint.

## Ordering information

Fixture	System	Overall length	Metal finish
<b>RES1</b> - Retro 16 Cable Suspended	<b>CA4</b> - Cable 4" <b>CA6</b> - Cable 6" <b>TR4</b> - Twin Rail 4"	<b>Cable:</b> <b>ST</b> - Standard 72" <b>12" - 72"</b> - Specify Length (in 12" increments)	<b>AL</b> - Satin Aluminum <b>PN</b> - Polished Nickel <b>RB</b> - Rubbed Bronze (Rubbed Bronze is not available for Twin Rail)
<b>RES2</b> - Retro 16 Stem Suspended	<b>TR6</b> - Twin Rail 6" <b>BTC</b> - Basis Ceiling <b>BTW</b> - Basis Wall (Max. 16") <b>LT</b> - Liana <b>NS</b> - No System Connector*	<b>Stem:</b> <b>ST</b> - Standard 6" <b>12" - 72"</b> - Specify Length (in 6" increments)  (When ordering a non-standard drop length, use whole numbers only - no fractional inches.) <b>Note:</b> When using the RES2 with the MPT1-S-N or MPT1-S-R monopoints, overall fixture length must be a minimum of 10".	<b>GB</b> <sup>1</sup> - Gloss Black <b>WH</b> <sup>1</sup> - White ( <sup>1</sup> Available for BTC, BTW, and NS only)

## Translite Systems, Retro 16

Page 2 of 3

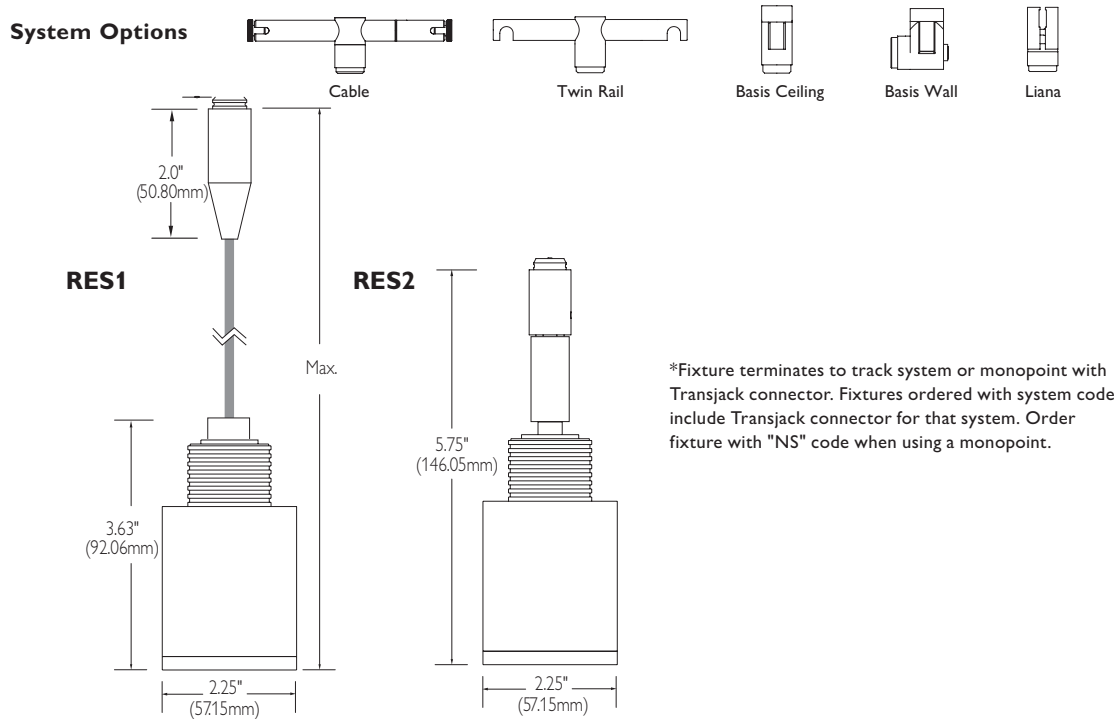**Features**

- Description:** Precision machined luminaire with integral single accessory holder and clear lens.
- System options:** Retro 16 is available for Cable 4" & 6", Twin Rail 4" & 6", Basis Ceiling Mount, Basis Wall Mount, Liana and low voltage monopoints.
- Lamping:** MR16 50w max.
- Function:** Rotates 360 degrees. Pivots 90 degrees at socket. Suspended by metal rod or cable. Cable suspension is field adjustable. Stem suspension is not field adjustable.
- Electrical:** Transjack connector contacts utilize 24kt gold plated brass pin and sleeve connector housed in aluminum.

**Metal finishes**

- Satin Aluminum**
  - Polished Nickel**
  - Rubbed Bronze**
  - Gloss Black<sup>1</sup>**
  - White<sup>1</sup>**
- (Rubbed Bronze is not available for Twin Rail)  
(<sup>1</sup>Available for BTC, BTW, and NS only)

**Labels**

UL and cUL listed.

# Translite Systems, Retro 16

Page 3 of 3

## Measuring overall length

### Track system fixtures

Overall length for a track system fixture is measured from the bottom of the track to the bottom of the fixture.


To calculate overall length, take the distance from the bottom of the fixture to the top of the Transjack connector\* and add the system connector measurement for the selected system. Overall length differs according to the system connector selected.

	Basis	Cable Twin Rail	Liana	NS
System Connector Measurement	.38"	.63"	.94"	0"

### Monopoints

Overall length for a monopoint fixture is measured from bottom of the monopoint to the bottom of the fixture. (The monopoint canopy is measured separately.)

This measurement is equivalent to the distance from the bottom of the fixture to the top of the Transjack connector.\*

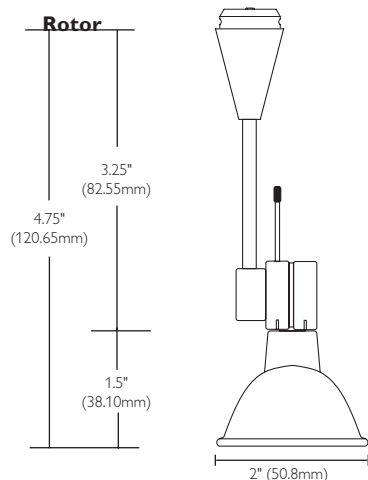

### Track system fixture example

To calculate the overall length for the Rotor fixture on a Liana track system, add 4.75" to 0.94. Overall length for a standard Rotor fixture on the Liana Track is 5.69". A Rotor fixture specified at 10" would have an overall length of 10.94" on Liana.

### Monopoint fixture example

Overall length for a standard Rotor fixture on a monopoint is 4.75". A Rotor fixture specified at 10" would have an overall length of 10" on a monopoint.

\* In the drawing above, the distance from the bottom of the fixture to the top of the Transjack connector equals 4.75". This represents the standard (ST) length for this fixture. ST measurements in the product ordering tables are approximate for

stem suspended fixtures and do not represent exact overall length. For exact ST measurements for stem suspended fixtures, reference the specification drawings.



Philips Lightolier  
e: [lol.webmaster@philips.com](mailto:lol.webmaster@philips.com)  
t: (508) 679-8131  
w: [www.lightolier.com](http://www.lightolier.com)

RES May 21, 2012

Specifications are subject to change without notice.  
© Koninklijke Philips Electronics N.V., 2012. All rights reserved.