


# RET

## Translite Systems, Retro 20

Page 1 of 3

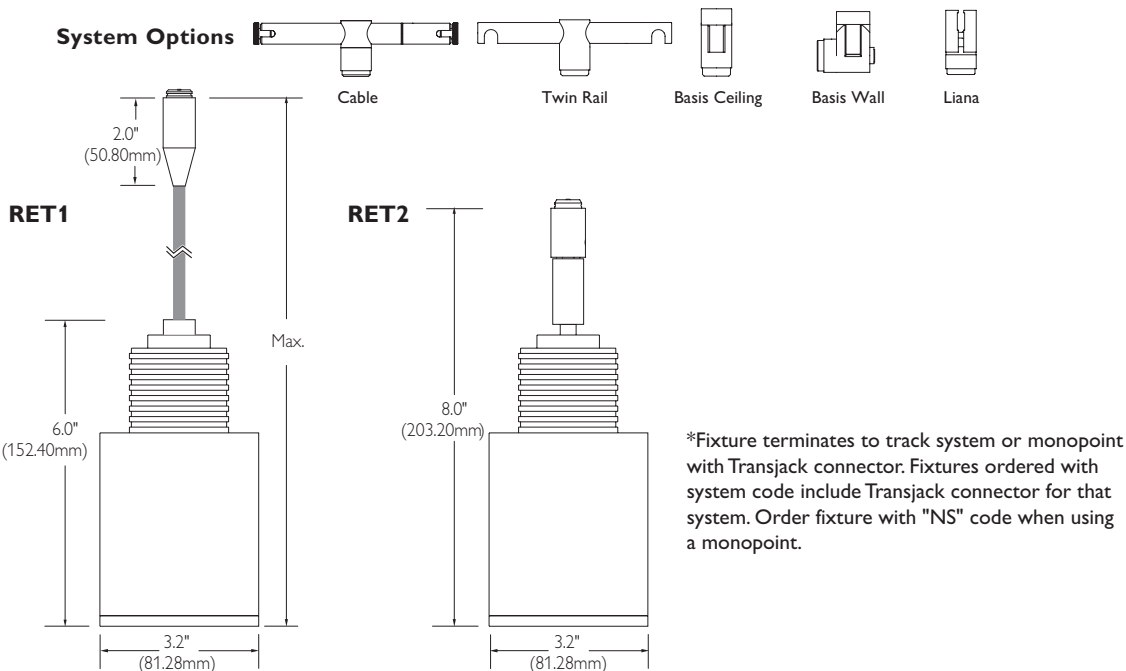

### Ordering Information

Fixture	System	Overall Length	Lamping	Metal Finish
<b>RET1-</b> Retro 20 Cable Suspended	<b>CA4</b> - Cable 4" <b>CA6</b> - Cable 6" <b>TR4</b> - Twin Rail 4" <b>TR6</b> - Twin Rail 6" <b>BTC</b> - Basis Ceiling <b>BTW</b> - Basis Wall (Max. 16") <b>LT</b> - Liana <b>NS</b> - No System Connector*	<b>Cable:</b> <b>ST</b> - Standard 72" <b>12" - 72"</b> - Specify Length (in 12" increments) <b>Stem:</b> <b>ST</b> - Standard 8" <b>12" - 72"</b> - Specify Length (in 6" increments)  (When ordering a non-standard overall length, use whole numbers only - no fractional inches.)	<b>AR70</b> - 50 max. <b>MR16</b> - 50 max.	<b>AL</b> - Satin Aluminum <b>PN</b> - Polished Nickel <b>RB</b> - Rubbed Bronze (Rubbed Bronze is not available for Twin Rail) <b>GB</b> <sup>1</sup> - Gloss Black <b>WH</b> <sup>1</sup> - White ( <sup>1</sup> Available for BTC, BTW, and NS only)
<b>RET2-</b> Retro 20 Stem Suspended				


Job Information	Type:
Job Name:	
Cat. No.:	
Notes:	

**PHILIPS**  
**LIGHTOLIER**

# RET

## Translite Systems, Retro 20

Page 2 of 3

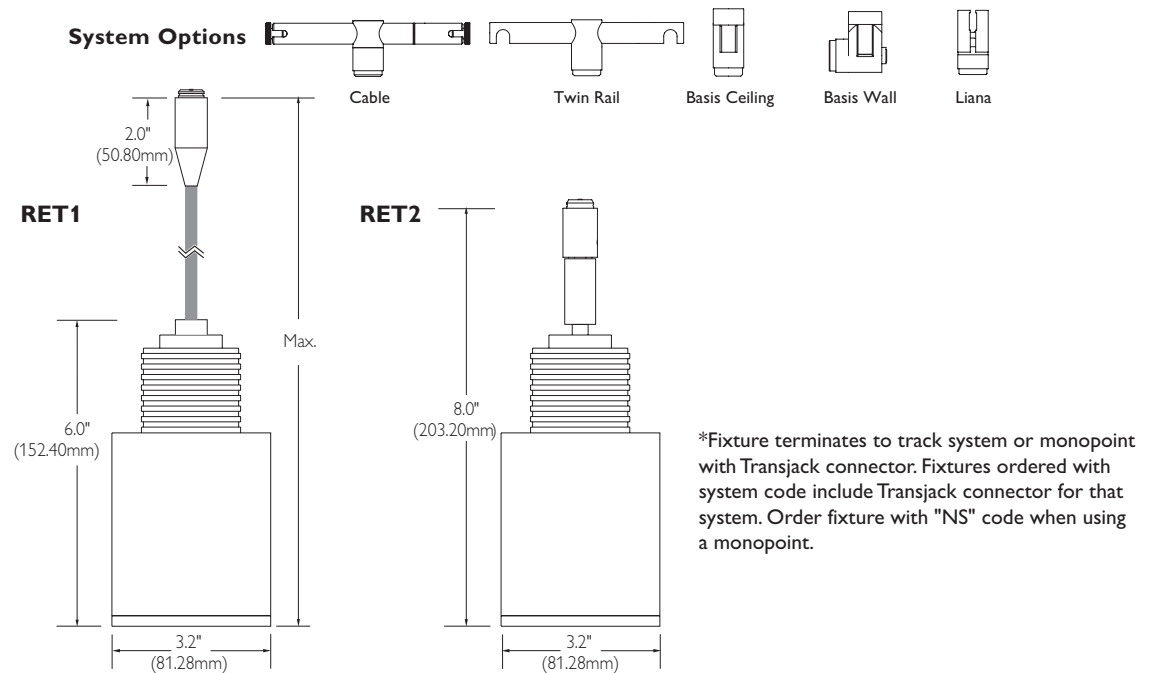

### Features

- Description:** Precision machined luminaire with integral single accessory holder and clear lens.
- System Options:** Retro 20 is available for Cable 4" & 6", Twin Rail 4" & 6", Basis Ceiling Mount, Basis Wall Mount, Liana and low voltage monopoints.
- Lamping:** AR70 50w max or MR16 50w max.
- Function:** RET2 rotates 360 degrees and pivots 90 degrees at socket. Suspended by metal rod or cable. Cable suspension is field adjustable. Stem suspension is not field adjustable.
- Electrical:** Transjack connector contacts utilize 24kt gold plated brass pin and sleeve connector housed in aluminum.

### Accessories

Double accessory holder, filters, louvers, snoots.

### Metal Finishes

- Satin Aluminum
  - Polished Nickel
  - Rubbed Bronze – finish is crafted with a solid brass substrate and buffed by hand to create an authentic rubbed bronze finish. Due to this hand-applied process, finish may vary.
  - Gloss Black<sup>1</sup>
  - White<sup>1</sup>
- (Rubbed Bronze is not available for Twin Rail)
- (<sup>1</sup>Available for BTC, BTW, and NS only)

### Labels

UL and cUL listed.

<b>Job Information</b>	<b>Type:</b>
------------------------	--------------

**PHILIPS**  
**LIGHTOLIER**

### Measuring Overall Length

#### Track System Fixtures

Overall length for a track system fixture is measured from the bottom of the track to the bottom of the fixture.


To calculate overall length, take the distance from the bottom of the fixture to the top of the Transjack connector\* and add the system connector measurement for the selected system. Overall length differs according to the system connector selected.

	Basis	Cable Twin Rail	Liana	NS
System Connector Measurement	.38"	.63"	.94"	0"

#### Monopoints

Overall length for a monopoint fixture is measured from bottom of the monopoint to the bottom of the fixture.  
(The monopoint canopy is measured separately.)

This measurement is equivalent to the distance from the bottom of the fixture to the top of the Transjack connector.\*

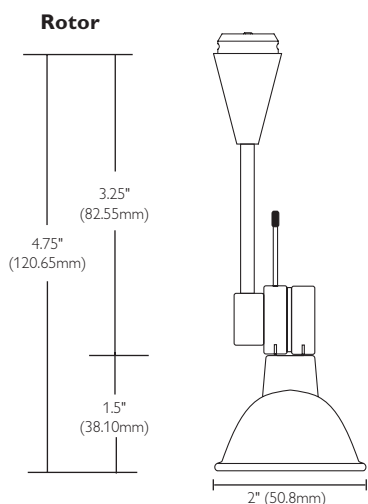

#### Track System Fixture Example

To calculate the overall length for the Rotor fixture on a Liana track system, add 4.75" to 0.94. Overall length for a standard Rotor fixture on the Liana Track is 5.69". A Rotor fixture specified at 10" would have an overall length of 10.94" on Liana.

#### Monopoint Fixture Example

Overall length for a standard Rotor fixture on a monopoint is 4.75". A Rotor fixture specified at 10" would have an overall length of 10" on a monopoint.

\* In the drawing above, the distance from the bottom of the fixture to the top of the Transjack connector equals 4.75". This represents the standard (ST) length for this fixture. ST measurements in the product ordering tables are approximate for stem suspended fixtures and do not represent exact overall length. For exact ST measurements for stem suspended fixtures, reference the specification drawings.



Philips Lightolier  
e: [lol.webmaster@philips.com](mailto:lol.webmaster@philips.com)  
t: (508) 679-8131  
w: [www.lightolier.com](http://www.lightolier.com)

RET November 15, 2011

Specifications are subject to change without notice.  
© Koninklijke Philips Electronics N.V., 2011. All rights reserved.

Job Information Type: